

# pyAgrum Documentation

*Release 0.17.0*

**Pierre-Henri Wuillemin (Sphinx)**

**January 22, 2020**



---

## Main classes

---


<b>1 Bayesian Network</b>	<b>3</b>
1.1 Model . . . . .	3
1.2 Tools for Bayesian networks . . . . .	16
1.3 Inference . . . . .	31
1.4 Exact Inference . . . . .	31
1.5 Approximated Inference . . . . .	51
1.6 Learning . . . . .	106
<b>2 Graphs manipulation</b>	<b>115</b>
2.1 Edges and Arcs . . . . .	115
2.2 Directed Graphs . . . . .	116
2.3 Undirected Graphs . . . . .	121
2.4 Mixed Graph . . . . .	128
<b>3 Random Variables</b>	<b>133</b>
3.1 Common API for Random Discrete Variables . . . . .	133
3.2 Concrete classes for Random Discrete Variables . . . . .	135
<b>4 Potential and Instantiation</b>	<b>145</b>
4.1 Instantiation . . . . .	146
4.2 Potential . . . . .	151
<b>5 Module notebook</b>	<b>159</b>
5.1 Helpers . . . . .	165
5.2 Visualization of Potentials . . . . .	165
5.3 Visualization of graphs . . . . .	166
5.4 Visualization of graphical models . . . . .	166
5.5 Visualization of approximation algorithm . . . . .	169
<b>6 Module bn2graph</b>	<b>171</b>
6.1 Visualization of Potentials . . . . .	173
6.2 Visualization of Bayesian Networks . . . . .	173
6.3 Hi-level functions . . . . .	174
<b>7 Module dynamic bayesian network</b>	<b>175</b>
<b>8 Bayesian network as classifier</b>	<b>177</b>
<b>9 other pyAgrum.lib modules</b>	<b>179</b>
9.1 bn2roc . . . . .	179
9.2 bn2csv . . . . .	179
9.3 bn2scores . . . . .	181

9.4	bn_vs_bn . . . . .	181
9.5	pretty_print . . . . .	182
<b>10</b>	<b>pyAgrum.causal documentation</b>	<b>183</b>
10.1	Causal Model . . . . .	183
10.2	Causal Formula . . . . .	184
10.3	Causal Inference . . . . .	185
10.4	Abstract Syntax Tree for Do-Calculus . . . . .	186
10.5	Exceptions . . . . .	190
10.6	Notebook's tools for causality . . . . .	190
<b>11</b>	<b>Probabilistic Relational Models</b>	<b>193</b>
<b>12</b>	<b>Credal Networks</b>	<b>199</b>
12.1	Model . . . . .	199
12.2	Inference . . . . .	204
<b>13</b>	<b>Influence Diagram</b>	<b>211</b>
13.1	Model . . . . .	211
13.2	Inference . . . . .	217
<b>14</b>	<b>Functions from pyAgrum</b>	<b>219</b>
14.1	Input/Output for bayesian networks . . . . .	220
14.2	Input for influence diagram . . . . .	221
<b>15</b>	<b>Other functions from aGrUM</b>	<b>223</b>
15.1	Listeners . . . . .	223
15.2	Random functions . . . . .	224
15.3	OMP functions . . . . .	225
<b>16</b>	<b>Exceptions from aGrUM</b>	<b>227</b>
<b>17</b>	<b>Indices and tables</b>	<b>239</b>
	<b>Python Module Index</b>	<b>241</b>
	<b>Index</b>	<b>243</b>

pyAgrum is a Python wrapper for the C++ aGrUM (<http://agrume.org>) library. It provides a high-level interface to the C++ part of aGrUM allowing to create, manage and perform efficient computations with Bayesian Networks.

```
import pyAgrum as gum
import pyAgrum.lib.notebook as gnb

bn=gum.fastBN("a->b<-c;b->d",3)
gnb.sideBySide(bn,
               bn.cpt("b"),
               gnb.getJunctionTree(bn),
               captions=['a BN','a CPT','a Junction Tree'])
```

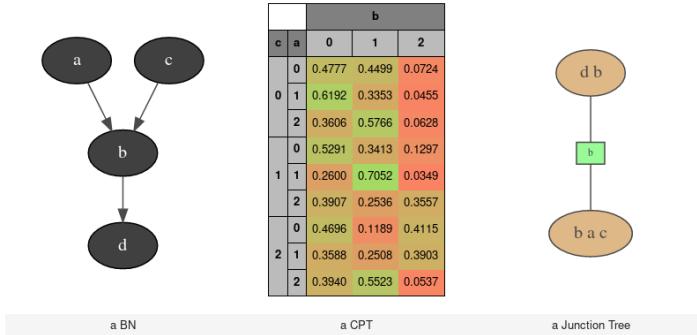

(<http://agrume.org>)

The module is generated using the **SWIG** (<https://www.swig.org>) interface generator. Custom-written code was added to make the interface more user friendly.

pyAgrum aims to allow to easily use (as well as to prototype new algorithms on) Bayesian network and other graphical models.


### pyAgrum contains

- a comprehensive API documentation (<https://pyagrum.readthedocs.io>),
- tutorials as jupyter notebooks (<http://www-desir.lip6.fr/~phw/aGrUM/docs/last/notebooks/01-tutorial.ipynb.html>),
- a gitlab repository (<https://gitlab.com/agrume/aGrUM>),
- and a website (<http://agrume.org>).



# CHAPTER 1

## Bayesian Network

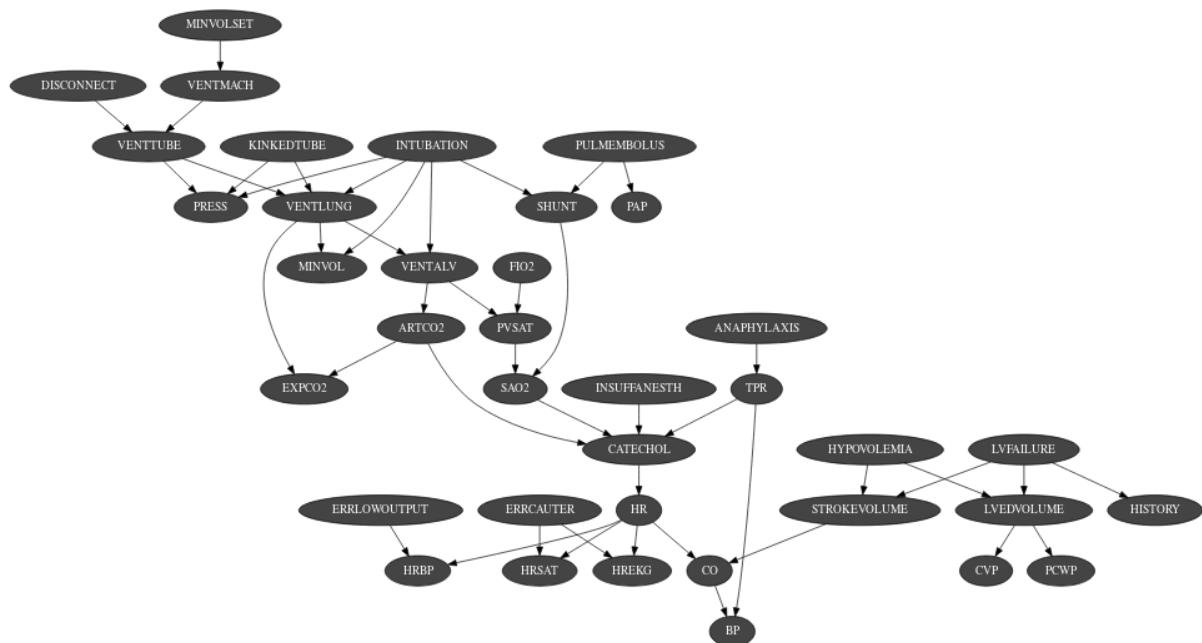

The Bayesian Network is the main object of pyAgrum. A Bayesian network is a probabilistic graphical model. It represents a joint distribution over a set of random variables. In pyAgrum, the variables are (for now) only discrete.

A Bayesian network uses a directed acyclic graph (DAG) to represent conditional independencies in the joint distribution. These conditional independencies allow to factorize the joint distribution, thereby allowing to compactly represent very large ones. Moreover, inference algorithms can also use this graph to speed up the computations. Finally, the Bayesian networks can be learnt from data.

### 1.1 Model

```
class pyAgrum.BayesNet (*args)
    BayesNet represents a Bayesian Network.
```

**BayesNet(name='')** -> **BayesNet**

**Parameters:**

- **name** (*str*) – the name of the Bayes Net

**BayesNet(source)** -> **BayesNet**

**Parameters:**

- **source** (*pyAgrum.BayesNet*) – the Bayesian network to copy

**add** (*BayesNet self, DiscreteVariable var*)

add(BayesNet self, str name, unsigned int nbrmod) -> int add(BayesNet self, DiscreteVariable var, pyAgrum.MultiDimImplementation aContent) -> int add(BayesNet self, DiscreteVariable var, int id) -> int add(BayesNet self, DiscreteVariable var, pyAgrum.MultiDimImplementation aContent, int id) -> int

Add a variable to the pyAgrum.BayesNet.

**Parameters**

- **variable** (*pyAgrum.DiscreteVariable* (page 133)) – the variable added
- **name** (*str*) – the variable name
- **nbrmod** (*int*) – the number of modalities for the new variable
- **id** (*int*) – the variable forced id in the pyAgrum.BayesNet

**Returns** the id of the new node

**Return type** int

**Raises**

- *gum.DuplicateLabel* – If variable.name() is already used in this pyAgrum.BayesNet.
- *gum.NotAllowed* – If nbrmod is less than 2
- *gum.DuplicateElement* – If id is already used.

**addAMPLITUDE** (*BayesNet self, DiscreteVariable var*)

Others aggregators

**Parameters** **variable** (*pyAgrum.DiscreteVariable* (page 133)) – the variable to be added

**Returns** the id of the added value

**Return type** int

**addAND** (*BayesNet self, DiscreteVariable var*)

Add a variable, it's associate node and an AND implementation.

The id of the new variable is automatically generated.

**Parameters** **variable** (*pyAgrum.DiscreteVariable* (page 133)) – The variable added by copy.

**Returns** the id of the added variable.

**Return type** int

**Raises** *gum.SizeError* – If variable.domainSize()>2

**addArc** (*BayesNet self, int tail, int head*)

addArc(BayesNet self, str tail, str head)

Add an arc in the BN, and update arc.head's CPT.

**Parameters**

- **head** – a variable's id (int)
- **tail** – a variable's id (int)
- **head** – a variable's name (str)
- **tail** – a variable's name (str)

**Raises**

- gum.InvalidEdge – If arc.tail and/or arc.head are not in the BN.
- gum.DuplicateElement – If the arc already exists.

**addCOUNT** (*BayesNet self, DiscreteVariable var, int value=1*)

Others aggregators

**Parameters** **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable to be added

**Returns** the id of the added value

**Return type** int

**addEXISTS** (*BayesNet self, DiscreteVariable var, int value=1*)

Others aggregators

**Parameters** **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable to be added

**Returns** the id of the added value

**Return type** int

**addFORALL** (*BayesNet self, DiscreteVariable var, int value=1*)

Others aggregators

**Parameters** **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable to be added

**Returns** the id of the added variable.

**Return type** int

**addLogit** (*BayesNet self, DiscreteVariable var, double external\_weight, int id*)

addLogit(BayesNet self, DiscreteVariable var, double external\_weight) -&gt; int

Add a variable, its associate node and a Logit implementation.

(The id of the new variable can be automatically generated.)

**Parameters**

- **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable added by copy
- **externalWeight** (*double*) – the added external weight
- **id** (*int*) – The proposed id for the variable.

**Returns** the id of the added variable.

**Return type** int

**Raises** gum.DuplicateElement – If id is already used

**addMAX** (*BayesNet self, DiscreteVariable var*)

Others aggregators

**Parameters** **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable to be added

**Returns** the id of the added value

**Return type** int

**addMEDIAN** (*BayesNet self, DiscreteVariable var*)  
Others aggregators

**Parameters** **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable to be added

**Returns** the id of the added value

**Return type** int

**addMIN** (*BayesNet self, DiscreteVariable var*)  
Others aggregators

**Parameters** **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable to be added

**Returns** the id of the added value

**Return type** int

**addNoisyAND** (*BayesNet self, DiscreteVariable var, double external\_weight, int id*)  
addNoisyAND(*BayesNet self, DiscreteVariable var, double external\_weight*) -> int

Add a variable, its associate node and a noisyAND implementation.

(The id of the new variable can be automatically generated.)

**Parameters**

- **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable added by copy
- **externalWeight** (*double*) – the added external weight
- **id** (*int*) – The proposed id for the variable.

**Returns** the id of the added variable.

**Return type** int

**Raises** `gum.DuplicateElement` – If id is already used

**addNoisyOR** (*BayesNet self, DiscreteVariable var, double external\_weight*)  
addNoisyOR(*BayesNet self, DiscreteVariable var, double external\_weight, int id*) -> int

Add a variable, it's associate node and a noisyOR implementation.

Since it seems that the ‘classical’ noisyOR is the Compound noisyOR, we keep the addNoisyOR as an alias for addNoisyORCompound.

(The id of the new variable can be automatically generated.)

**Parameters**

- **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable added by copy
- **externalWeight** (*double*) – the added external weight
- **id** (*int*) – The proposed id for the variable.

**Returns** the id of the added variable.

**Return type** int

**Raises** `gum.DuplicateElement` – If id is already used

**addNoisyORCompound** (*BayesNet self, DiscreteVariable var, double external\_weight*)  
addNoisyORCompound(*BayesNet self, DiscreteVariable var, double external\_weight, int id*) -> int

Add a variable, it's associate node and a noisyOR implementation.

Since it seems that the ‘classical’ noisyOR is the Compound noisyOR, we keep the addNoisyOR as an alias for addNoisyORCompound.

(The id of the new variable can be automatically generated.)

#### Parameters

- **variable** (`pyAgrum.DiscreteVariable` (page 133)) – The variable added by copy
- **externalWeight** (`double`) – the added external weight
- **id** (`int`) – The proposed id for the variable.

**Returns** the id of the added variable.

**Return type** int

**Raises** `gum.DuplicateElement` – If id is already used

**addNoisyORNet** (`BayesNet self, DiscreteVariable var, double external_weight`)

`addNoisyORNet(BayesNet self, DiscreteVariable var, double external_weight, int id) -> int`

Add a variable, its associate node and a noisyOR implementation.

Since it seems that the ‘classical’ noisyOR is the Compound noisyOR, we keep the addNoisyOR as an alias for addNoisyORCompound.

(The id of the new variable can be automatically generated.)

#### Parameters

- **variable** (`pyAgrum.DiscreteVariable` (page 133)) – The variable added by copy
- **externalWeight** (`double`) – the added external weight
- **id** (`int`) – The proposed id for the variable.

**Returns** the id of the added variable.

**Return type** int

**addOR** (`BayesNet self, DiscreteVariable var`)

Add a variable, it’s associate node and an OR implementation.

The id of the new variable is automatically generated.

**Warning:** If parents are not boolean, all value>1 is True

**Parameters** **variable** (`pyAgrum.DiscreteVariable` (page 133)) – The variable added by copy

**Returns** the id of the added variable.

**Return type** int

**Raises** `gum.SizeError` – If variable.domainSize()>2

**addStructureListener** (`whenNodeAdded=None, whenNodeDeleted=None, whenArcAdded=None, whenArcDeleted=None`)

Add the listeners in parameters to the list of existing ones.

#### Parameters

- **whenNodeAdded** (`lambda expression`) – a function for when a node is added
- **whenNodeDeleted** (`lambda expression`) – a function for when a node is removed

- **whenArcAdded** (*lambda expression*) – a function for when an arc is added
- **whenArcDeleted** (*lambda expression*) – a function for when an arc is removed

**addWeightedArc** (*BayesNet self, int tail, int head, double causalWeight*)  
 addWeightedArc(*BayesNet self, str tail, str head, double causalWeight*)

Add an arc in the BN, and update arc.head's CPT.

#### Parameters

- **head** – a variable's id (int)
- **tail** – a variable's id (int)
- **head** – a variable's name (str)
- **tail** – a variable's name (str)
- **causalWeight** (*double*) – the added causal weight

#### Raises

- `gum.InvalidArc` – If arc.tail and/or arc.head are not in the BN.
- `gum.InvalidArc` – If variable in arc.head is not a NoisyOR variable.

**arcs** (*BayesNet self*)

**Returns** The list of arcs in the IBayesNet

**Return type** list

**beginTopologyTransformation** (*BayesNet self*)

When inserting/removing arcs, node CPTs change their dimension with a cost in time. begin Multiple Change for all CPTs These functions delay the CPTs change to be done just once at the end of a sequence of topology modification, begins a sequence of insertions/deletions of arcs without changing the dimensions of the CPTs.

**changePotential** (*BayesNet self, int id, Potential newPot*)

changePotential(*BayesNet self, str name, Potential newPot*)

change the CPT associated to nodeId to newPot delete the old CPT associated to nodeId.

#### Parameters

- **newPot** ([pyAgrum.Potential](#) (page 151)) – the new potential
- **NodeId** (*int*) – the id of the node
- **name** (*str*) – the name of the variable

**Raises** `gum.NotAllowed` – If newPot has not the same signature as \_\_probaMap[NodeId]

**changeVariableLabel** (*BayesNet self, int id, str old\_label, str new\_label*)

changeVariableLabel(*BayesNet self, str name, str old\_label, str new\_label*)

change the label of the variable associated to nodeId to the new value.

#### Parameters

- **id** (*int*) – the id of the node
- **name** (*str*) – the name of the variable
- **old\_label** (*str*) – the new label
- **new\_label** (*str*) – the new label

**Raises** `gum.NotFound` – if id/name is not a variable or if old\_label does not exist.

**changeVariableName** (*BayesNet self, int id, str new\_name*)  
**changeVariableName**(*BayesNet self, str name, str new\_name*)

Changes a variable's name in the pyAgrum.BayesNet.

This will change the pyAgrum.DiscreteVariable names in the pyAgrum.BayesNet.

#### Parameters

- **new\_name** (*str*) – the new name of the variable
- **NodeId** (*int*) – the id of the node
- **name** (*str*) – the name of the variable

#### Raises

- `gum.DuplicateLabel` – If new\_name is already used in this BayesNet.
- `gum.NotFound` – If no variable matches id.

**children** (*BayesNet self, PyObject \* norid*)

**Parameters** **id** (*int*) – the id of the parent

**Returns** the set of all the children

**Return type** Set

**clear** (*BayesNet self*)

Clear the whole BayesNet

**completeInstantiation** (*DAGmodel self*)

Get an instantiation over all the variables of the model.

**Returns** the complete instantiation

**Return type** pyAgrum.instantiation

**connectedComponents** ()

connected components from a graph/BN

Compute the connected components of a pyAgrum's graph or Bayesian Network (more generally an object that has *nodes*, *children/parents* or *neighbours* methods)

The firstly visited node for each component is called a ‘root’ and is used as a key for the component. This root has been arbitrarily chosen during the algorithm.

**Parameters** **graph** (*pyAgrum's graph*) – A graph, a Bayesian network, more generally an object that has *nodes*, *children/parents* or *neighbours* methods in which the search will take place

**Returns** dict of connected components (as set of nodeIds (int)) with a nodeId (root) of each component as key.

**Return type** dict(int,Set[int])

**cpt** (*BayesNet self, int varId*)

`cpt(BayesNet self, str name) -> Potential`

Returns the CPT of a variable.

#### Parameters

- **VarId** (*int*) – A variable's id in the pyAgrum.BayesNet.
- **name** (*str*) – A variable's name in the pyAgrum.BayesNet.

**Returns** The variable's CPT.

**Return type** `pyAgrum.Potential` (page 151)

**Raises** `gum.NotFound` – If no variable's id matches varId.

**dag** (*BayesNet self*)

**Returns** a constant reference to the dag of this BayesNet.

**Return type** [pyAgrum.DAG](#) (page 119)

**dim** (*IBayesNet self*)

Returns the dimension (the number of free parameters) in this BayesNet.

**Returns** the dimension of the BayesNet

**Return type** int

**empty** (*DAGmodel self*)

**Returns** True if the model is empty

**Return type** bool

**endTopologyTransformation** (*BayesNet self*)

Terminates a sequence of insertions/deletions of arcs by adjusting all CPTs dimensions. End Multiple Change for all CPTs.

**Returns**

**Return type** [pyAgrum.BayesNet](#) (page 3)

**erase** (*BayesNet self, int varId*)

erase(BayesNet self, str name) erase(BayesNet self, DiscreteVariable var)

Remove a variable from the pyAgrum.BayesNet.

Removes the corresponding variable from the pyAgrum.BayesNet and from all of it's children pyAgrum.Potential.

If no variable matches the given id, then nothing is done.

**Parameters**

- **id** (int) – The variable's id to remove.
- **name** (str) – The variable's name to remove.
- **var** ([pyAgrum.DiscreteVariable](#) (page 133)) – A reference on the variable to remove.

**eraseArc** (*BayesNet self, Arc arc*)

eraseArc(BayesNet self, int tail, int head) eraseArc(BayesNet self, str tail, str head)

Removes an arc in the BN, and update head's CTP.

If (tail, head) doesn't exist, the nothing happens.

**Parameters**

- **arc** ([pyAgrum.Arc](#) (page 115)) – The arc to be removed.
- **head** – a variable's id (int)
- **tail** – a variable's id (int)
- **head** – a variable's name (str)
- **tail** – a variable's name (str)

**static fastPrototype** (*str dotlike, int domainSize=2*)

Create a Bayesian network with a dot-like syntax which specifies:

- the structure 'a->b->c;b->d<-e;'.
  - the type of the variables with different syntax:
    - by default, a variable is a `gum.RangeVariable` using the default domain size (second argument)

- with ‘a[10]’, the variable is a gum.RangeVariable using 10 as domain size (from 0 to 9)
- with ‘a[3,7]’, the variable is a gum.RangeVariable using a domainSize from 3 to 7
- with ‘a[1,3.14,5,6.2]’, the variable is a gum.DiscretizedVariable using the given ticks (at least 3 values)
- with ‘a{top|middle|bottom}’, the variable is a gum.LabelizedVariable using the given labels.

**Note:**

- If the dot-like string contains such a specification more than once for a variable, the first specification will be used.
- the CPTs are randomly generated.
- see also pyAgrum.fastBN.

**Examples**

```
>>> import pyAgrum as gum
>>> bn=gum.BayesNet.fastPrototype('A->B[1,3]<-C{yes|No}->D[2,4]<-E[1,2.5,3.
  ↵9]', 6)
```

**Parameters**

- **dotlike** (*str*) – the string containing the specification
- **domainSize** (*int*) – the default domain size for variables

**Returns** the resulting bayesian network**Return type** *pyAgrum.BayesNet* (page 3)

**generateCPT** (*BayesNet self, int node*)  
generateCPT(*BayesNet self, str name*)

Randomly generate CPT for a given node in a given structure.

**Parameters**

- **node** (*int*) – The variable’s id.
- **name** (*str*) – The variable’s name.

**generateCPTs** (*BayesNet self*)  
Randomly generates CPTs for a given structure.

**hasSameStructure** (*DAGmodel self, DAGmodel other*)**Parameters** *pyAgrum.DAGmodel* – a direct acyclic model**Returns** True if all the named node are the same and all the named arcs are the same**Return type** bool

**idFromName** (*BayesNet self, str name*)  
Returns a variable’s id given its name in the graph.

**Parameters** **name** (*str*) – The variable’s name from which the id is returned.**Returns** The variable’s node id.**Return type** int**Raises** *gum.NotFound* – If name does not match a variable in the graph

**ids()**

Deprecated method in pyAgrum>0.12.0. See nodes instead.

**jointProbability (IBayesNet self, Instantiation i)**

**Parameters** **i** (*pyAgrum.instantiation*) – an instantiation of the variables

**Returns** a parameter of the joint probability for the BayesNet

**Return type** double

**Warning:** a variable not present in the instantiation is assumed to be instantiated to 0

**loadBIF (BayesNet self, str name, PyObject \* l=(PyObject \*) 0)**

Load a BIF file.

**Parameters**

- **name** (*str*) – the file's name
- **l** (*list*) – list of functions to execute

**Raises**

- `gum.IOError` – If file not found
- `gum.FatalError` – If file is not valid

**loadBIFXML (BayesNet self, str name, PyObject \* l=(PyObject \*) 0)**

Load a BIFXML file.

**Parameters**

- **name** (*str*) – the name's file
- **l** (*list*) – list of functions to execute

**Raises**

- `gum.IOError` – If file not found
- `gum.FatalError` – If file is not valid

**loadDSL (BayesNet self, str name, PyObject \* l=(PyObject \*) 0)**

Load a DSL file.

**Parameters**

- **name** (*str*) – the file's name
- **l** (*list*) – list of functions to execute

**Raises**

- `gum.IOError` – If file not found
- `gum.FatalError` – If file is not valid

**loadNET (BayesNet self, str name, PyObject \* l=(PyObject \*) 0)**

Load a NET file.

**Parameters**

- **name** (*str*) – the name's file
- **l** (*list*) – list of functions to execute

**Raises**

- `gum.IOError` – If file not found
- `gum.FatalError` – If file is not valid

**loadO3PRM** (*BayesNet self*, *str name*, *str system=""*, *str classpath=""*, *PyObject \* l=(PyObject \*) 0*)  
Load an O3PRM file.

**Warning:** The O3PRM language is the only language allowing to manipulate not only DiscretizedVariable but also RangeVariable and LabelizedVariable.

#### Parameters

- **name** (*str*) – the file's name
- **system** (*str*) – the system's name
- **classpath** (*str*) – the classpath
- **l** (*list*) – list of functions to execute

#### Raises

- `gum IOError` – If file not found
- `gum.FatalError` – If file is not valid

**loadUAI** (*BayesNet self*, *str name*, *PyObject \* l=(PyObject \*) 0*)  
Load an UAI file.

#### Parameters

- **name** (*str*) – the name's file
- **l** (*list*) – list of functions to execute

#### Raises

- `gum IOError` – If file not found
- `gum.FatalError` – If file is not valid

**log10DomainSize** (*BayesNet self*)

**Returns** The log10 domain size of the joint probability for the model.

**Return type** double

**log2JointProbability** (*IBayesNet self*, *Instantiation i*)

**Parameters** *i* (`pyAgrum.instantiation`) – an instantiation of the variables

**Returns** a parameter of the log joint probability for the BayesNet

**Return type** double

**Warning:** a variable not present in the instantiation is assumed to be instantiated to 0

**maxNonOneParam** (*IBayesNet self*)

**Returns** The biggest value (not equal to 1) in the CPTs of the BayesNet

**Return type** double

**maxParam** (*IBayesNet self*)

**Returns** the biggest value in the CPTs of the BayesNet

**Return type** double

**maxVarDomainSize** (*IBayesNet self*)

**Returns** the biggest domain size among the variables of the BayesNet

**Return type** int

**minNonZeroParam** (IBayesNet self)

**Returns** the smallest value (not equal to 0) in the CPTs of the IBayesNet

**Return type** double

**minParam** (IBayesNet self)

**Returns** the smallest value in the CPTs of the IBayesNet

**Return type** double

**minimalCondSet** (BayesNet self, int target, PyObject \* list)

minimalCondSet(BayesNet self, PyObject \* targets, PyObject \* list) -> PyObject \*

**Returns**, given one or many targets and a list of variables, the minimal set of those needed to calculate the target/targets.

**Parameters**

- **target** (int) – The id of the target
- **targets** (list) – The ids of the targets
- **list** (list) – The list of available variables

**Returns** The minimal set of variables

**Return type** Set

**moralGraph** (DAGmodel self, bool clear=True)

**Returns** the moral graph of the BayesNet, formed by adding edges between all pairs of nodes that have a common child, and then making all edges in the graph undirected.

**Returns** The moral graph

**Return type** [pyAgrum.UndiGraph](#) (page 121)

**names** (BayesNet self)

**Returns** The names of the graph variables

**Return type** list

**nodeId** (BayesNet self, DiscreteVariable var)

**Parameters** **var** ([pyAgrum.DiscreteVariable](#) (page 133)) – a variable

**Returns** the id of the variable

**Return type** int

**Raises** `gum.IndexError` – If the graph does not contain the variable

**nodes** (BayesNet self)

**Returns** the set of ids

**Return type** set

**parents** (BayesNet self, PyObject \* norid)

**Parameters** **id** – The id of the child node

**Returns** the set of the parents ids.

**Return type** Set

**property** (DAGmodel self, str name)

**Warning:** Unreferenced function

**propertyWithDefault** (*DAGmodel self, str name, str byDefault*)

**Warning:** Unreferenced function

**reverseArc** (*BayesNet self, int tail, int head*)

reverseArc(BayesNet self, str tail, str head) reverseArc(BayesNet self, Arc arc)

Reverses an arc while preserving the same joint distribution.

#### Parameters

- **tail** – (int) the id of the tail variable
- **head** – (int) the id of the head variable
- **tail** – (str) the name of the tail variable
- **head** – (str) the name of the head variable
- **arc** ([pyAgrum.Arc](#) (page 115)) – an arc

**Raises** `gum.InvalidArc` – If the arc does not exist or if its reversal would induce a directed cycle.

**saveBIF** (*BayesNet self, str name*)

Save the BayesNet in a BIF file.

**Parameters** `name` (*str*) – the file's name

**saveBIFXML** (*BayesNet self, str name*)

Save the BayesNet in a BIFXML file.

**Parameters** `name` (*str*) – the file's name

**saveDSL** (*BayesNet self, str name*)

Save the BayesNet in a DSL file.

**Parameters** `name` (*str*) – the file's name

**saveNET** (*BayesNet self, str name*)

Save the BayesNet in a NET file.

**Parameters** `name` (*str*) – the file's name

**saveO3PRM** (*BayesNet self, str name*)

Save the BayesNet in an O3PRM file.

**Warning:** The O3PRM language is the only language allowing to manipulate not only DiscretizedVariable but also RangeVariable and LabelizedVariable.

**Parameters** `name` (*str*) – the file's name

**saveUAI** (*BayesNet self, str name*)

Save the BayesNet in an UAI file.

**Parameters** `name` (*str*) – the file's name

**setProperty** (*DAGmodel self, str name, str value*)

**Warning:** Unreferenced function

**size** (*BayesNet self*)

**Returns** the number of nodes in the graph

**Return type** int

**sizeArcs** (*DAGmodel self*)

**Returns** the number of arcs in the graph

**Return type** int

**toDot** (*IBayesNet self*)

**Returns** a friendly display of the graph in DOT format

**Return type** str

**topologicalOrder** (*DAGmodel self*, *bool clear=True*)

**Returns** the list of the nodes Ids in a topological order

**Return type** List

**Raises** gum.InvalidDirectedCycle – If this graph contains cycles

**variable** (*BayesNet self*, *int id*)

variable(*BayesNet self*, str name) -> DiscreteVariable

**Parameters**

- **id** (*int*) – a variable's id
- **name** (*str*) – a variable's name

**Returns** the variable

**Return type** *pyAgrum.DiscreteVariable* (page 133)

**Raises** gum.IndexError – If the graph does not contain the variable

**variableFromName** (*BayesNet self*, str name)

**Parameters** **name** (*str*) – a variable's name

**Returns** the variable

**Return type** *pyAgrum.DiscreteVariable* (page 133)

**Raises** gum.IndexError – If the graph does not contain the variable


**variableNodeMap** (*BayesNet self*)

**Returns** the variable node map

**Return type** pyAgrum.variableNodeMap

## 1.2 Tools for Bayesian networks

aGrUM/pyAgrum provide a set of classes and functions in order to easily work with Bayesian networks.

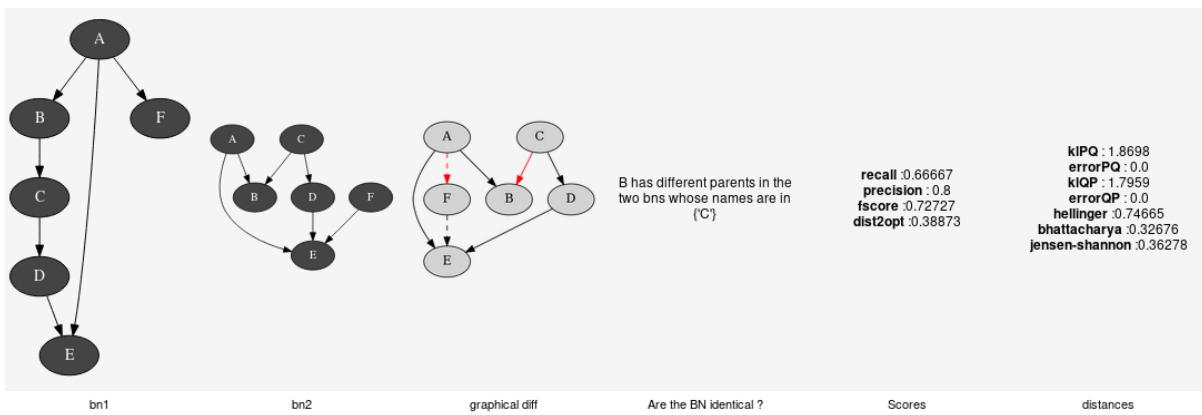

### 1.2.1 Generation of database

```
class pyAgrum.BNDatabaseGenerator (bn: pyAgrum.BayesNet)
BNDatabaseGenerator is used to easily generate databases from a gum.BayesNet.

BNDatabaseGenerator(bn) -> BNDatabaseGenerator

Parameters:
• bn (gum.BayesNet) – the Bayesian network used to generate data.

database (BNDatabaseGenerator self)
drawSamples (BNDatabaseGenerator self, int nbSamples)
log2likelihood (BNDatabaseGenerator self)
setAntiTopologicalVarOrder (BNDatabaseGenerator self)
setRandomVarOrder (BNDatabaseGenerator self)
setTopologicalVarOrder (BNDatabaseGenerator self)
setVarOrder (BNDatabaseGenerator self, vector< int, allocator< int > > varOrder)
    setVarOrder(BNDatabaseGenerator self, Vector_string varOrder)
setVarOrderFromCSV (BNDatabaseGenerator self, str csvFileURL, str csvSeparator=", ")
toCSV (BNDatabaseGenerator self, str csvFileURL, bool useLabels=True, bool append=False, str csvSeparator=", ", bool checkOnAppend=False)
toDatabaseTable (BNDatabaseGenerator self, bool useLabels=True)
varOrder (BNDatabaseGenerator self)
varOrderNames (BNDatabaseGenerator self)
```


### 1.2.2 Comparison of Bayesian networks

To compare Bayesian network, one can compare the structure of the BNs (see pyAgrum.lib.bn\_vs\_vb.GraphicalBNComparator). However BNs can also be compared as probability distributions.

```
class pyAgrum.ExactBNdistance (*args)
Class representing exact computation of divergence and distance between BNs

ExactBNdistance(P,Q) -> ExactBNdistance

Parameters:
• P (pyAgrum.BayesNet) a Bayesian network
• Q (pyAgrum.BayesNet) another Bayesian network to compare with the first one
```

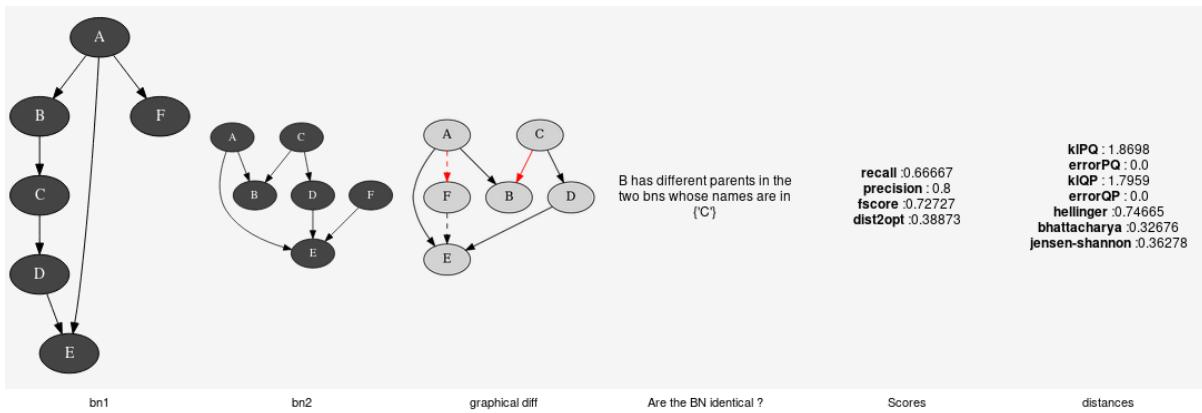

### ExactBNdistance(ebnd) -> ExactBNdistance

**Parameters:**

- **ebnd** (*pyAgrum.ExactBNdistance*) the exact BNdistance to copy

**Raises** `gum.OperationNotAllowed` – If the 2BNs have not the same domain size of compatible node sets

**compute** (*ExactBNdistance self*)

**Returns** a dictionnary containing the different values after the computation.

**Return type** dict

**class** `pyAgrum.GibbsBNdistance (*args)`

Class representing a Gibbs-Approximated computation of divergence and distance between BNs

### GibbsBNdistance(P,Q) -> GibbsBNdistance

**Parameters:**

- **P** (*pyAgrum.BayesNet*) – a Bayesian network
- **Q** (*pyAgrum.BayesNet*) – another Bayesian network to compare with the first one

### GibbsBNdistance(gbnd) -> GibbsBNdistance

**Parameters:**

- **gbnd** (*pyAgrum.GibbsBNdistance*) – the Gibbs BNdistance to copy

**Raises** `gum.OperationNotAllowed` – If the 2BNs have not the same domain size of compatible node sets

**burnIn** (*GibbsBNdistance self*)

**Returns** size of burn in on number of iteration

**Return type** int

**compute** (*GibbsBNdistance self*)

**Returns** a dictionnary containing the different values after the computation.

**Return type** dict

**continueApproximationScheme** (*ApproximationScheme self, double error*)

Continue the approximation scheme.

**Parameters** **error** (*double*) –

**currentTime** (*GibbsBNdistance self*)

---

**Returns** get the current running time in second (double)

**Return type** double

**disableEpsilon** (*ApproximationScheme self*)  
Disable epsilon as a stopping criterion.

**disableMaxIter** (*ApproximationScheme self*)  
Disable max iterations as a stopping criterion.

**disableMaxTime** (*ApproximationScheme self*)  
Disable max time as a stopping criterion.

**disableMinEpsilonRate** (*ApproximationScheme self*)  
Disable a min epsilon rate as a stopping criterion.

**enableEpsilon** (*ApproximationScheme self*)  
Enable epsilon as a stopping criterion.

**enableMaxIter** (*ApproximationScheme self*)  
Enable max iterations as a stopping criterion.

**enableMaxTime** (*ApproximationScheme self*)  
Enable max time as a stopping criterion.

**enableMinEpsilonRate** (*ApproximationScheme self*)  
Enable a min epsilon rate as a stopping criterion.

**epsilon** (*GibbsBNdistance self*)

**Returns** the value of epsilon

**Return type** double

**history** (*GibbsBNdistance self*)

**Returns** the scheme history

**Return type** tuple

**Raises** `gum.OperationNotAllowed` – If the scheme did not performed or if verbosity is set to false

**initApproximationScheme** (*ApproximationScheme self*)  
Initiate the approximation scheme.

**isDrawnAtRandom** (*GibbsBNdistance self*)

**Returns** True if variables are drawn at random

**Return type** bool

**isEnabledEpsilon** (*ApproximationScheme self*)

**Returns** True if epsilon is used as a stopping criterion.

**Return type** bool

**isEnabledMaxIter** (*ApproximationScheme self*)

**Returns** True if max iterations is used as a stopping criterion

**Return type** bool

**isEnabledMaxTime** (*ApproximationScheme self*)

**Returns** True if max time is used as a stopping criterion

**Return type** bool

**isEnabledMinEpsilonRate** (*ApproximationScheme self*)

**Returns** True if epsilon rate is used as a stopping criterion

**Return type** bool

**maxIter** (*GibbsBNdistance self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*GibbsBNdistance self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*GibbsBNdistance self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*GibbsBNdistance self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrDrawnVar** (*GibbsBNdistance self*)

**Returns** the number of variable drawn at each iteration

**Return type** int

**nbrIterations** (*GibbsBNdistance self*)

**Returns** the number of iterations

**Return type** int

**periodSize** (*GibbsBNdistance self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**remainingBurnIn** (*ApproximationScheme self*)

**Returns** the number of remaining burn in

**Return type** int

**setBurnIn** (*GibbsBNdistance self, int b*)

**Parameters** **b** (*int*) – size of burn in on number of iteration

**setDrawnAtRandom** (*GibbsBNdistance self, bool \_atRandom*)

**Parameters** **\_atRandom** (*bool*) – indicates if variables should be drawn at random

**setEpsilon** (*GibbsBNdistance self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If eps<0

**setMaxIter** (*GibbsBNdistance self, int max*)

**Parameters** **max** (*int*) – the maximum number of iteration

**Raises** gum.OutOfLowerBound – If max <= 1

**setMaxTime** (*GibbsBNdistance self, double timeout*)

**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)

**Raises** gum.OutOfLowerBound – If timeout<=0.0

**setMinEpsilonRate** (*GibbsBNdistance self, double rate*)  
**Parameters** **rate** (*double*) – the minimal epsilon rate

**setNbrDrawnVar** (*GibbsBNdistance self, int \_nbr*)  
**Parameters** **\_nbr** (*int*) – the number of variables to be drawn at each iteration

**setPeriodSize** (*GibbsBNdistance self, int p*)  
**Parameters** **p** (*int*) – number of samples between 2 stopping  
**Raises** `gum.OutOfLowerBound` – If  $p < 1$

**setVerbosity** (*GibbsBNdistance self, bool v*)  
**Parameters** **v** (*bool*) – verbosity

**startOfPeriod** (*ApproximationScheme self*)  
**Returns** True if it is a start of a period  
**Return type** *bool*


**stateApproximationScheme** (*ApproximationScheme self*)  
**Returns** the state of the approximation scheme  
**Return type** *int*

**stopApproximationScheme** (*ApproximationScheme self*)  
Stop the approximation scheme.

**updateApproximationScheme** (*ApproximationScheme self, unsigned int incr=1*)  
Update the approximation scheme.

**verbosity** (*GibbsBNdistance self*)  
**Returns** True if the verbosity is enabled  
**Return type** *bool*

### 1.2.3 Explanation and analysis

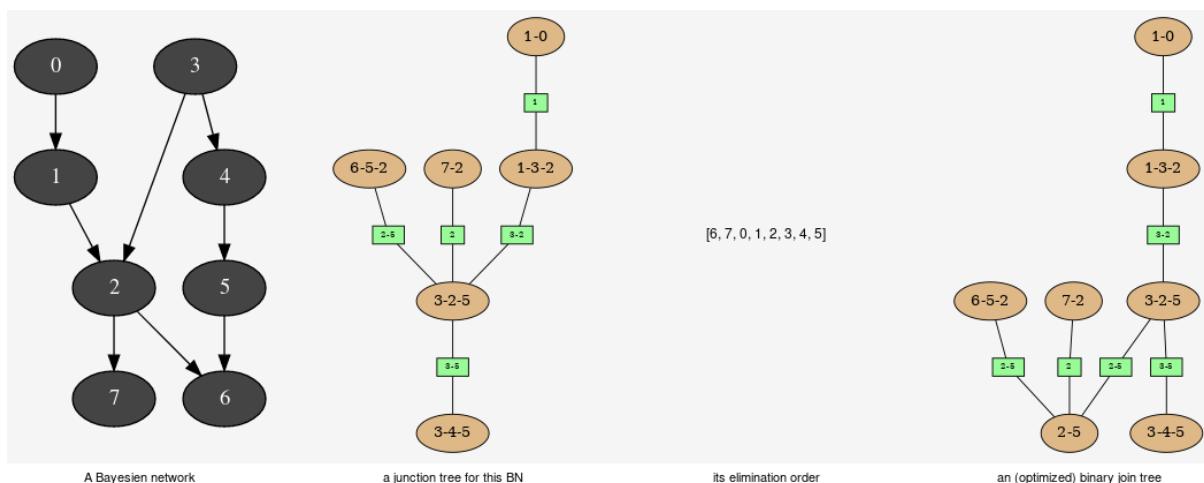

This tools aimed to provide some different views on the Bayesian network in order to explore its qualitative and/or quantitative behaviours.

**class pyAgrum.JunctionTreeGenerator**

JunctionTreeGenerator is use to generate junction tree or binary junction tree from bayesian networks.

**JunctionTreeGenerator() -> JunctionTreeGenerator** default constructor

**binaryJoinTree** (*JunctionTreeGenerator self*, *UndiGraph g*, *PyObject \* partial\_order=None*)  
 binaryJoinTree(JunctionTreeGenerator self, DAG dag, PyObject \* partial\_order=None) -> CliqueGraph  
 binaryJoinTree(JunctionTreeGenerator self, BayesNet bn, PyObject \* partial\_order=None) -> CliqueGraph

Computes the binary joint tree for its parameters. If the first parameter is a graph, the heuristics assume that all the node have the same domain size (2). If given, the heuristic takes into account the partial order for its elimination order.

#### Parameters

- **g** ([pyAgrum.UndiGraph](#) (page 121)) – a undirected graph
- **dag** ([pyAgrum.DAG](#) (page 119)) – a dag
- **bn** ([pyAgrum.BayesNet](#) (page 3)) – a BayesianNetwork
- **partial\_order** (*List [List [int]]*) – a partial order among the nodeIDs

**Returns** the current binary joint tree

**Return type** [pyAgrum.CliqueGraph](#) (page 124)

**eliminationOrder** (*JunctionTreeGenerator self*, *UndiGraph g*, *PyObject \* partial\_order=None*)  
 eliminationOrder(JunctionTreeGenerator self, DAG dag, PyObject \* partial\_order=None) -> PyObject  
 eliminationOrder(JunctionTreeGenerator self, BayesNet bn, PyObject \* partial\_order=None) -> PyObject

Computes the elimination for its parameters. If the first parameter is a graph, the heuristics assume that all the node have the same domain size (2). If given, the heuristic takes into account the partial order for its elimination order.

#### Parameters

- **g** ([pyAgrum.UndiGraph](#) (page 121)) – a undirected graph
- **dag** ([pyAgrum.DAG](#) (page 119)) – a dag
- **bn** ([pyAgrum.BayesNet](#) (page 3)) – a BayesianNetwork
- **partial\_order** (*List [List [int]]*) – a partial order among the nodeIDs

**Returns** the current elimination order.

**Return type** [pyAgrum.CliqueGraph](#) (page 124)

**junctionTree** (*JunctionTreeGenerator self*, *UndiGraph g*, *PyObject \* partial\_order=None*)  
 junctionTree(JunctionTreeGenerator self, DAG dag, PyObject \* partial\_order=None) -> CliqueGraph  
 junctionTree(JunctionTreeGenerator self, BayesNet bn, PyObject \* partial\_order=None) -> CliqueGraph

Computes the junction tree for its parameters. If the first parameter is a graph, the heuristics assume that all the node have the same domain size (2). If given, the heuristic takes into account the partial order for its elimination order.

#### Parameters

- **g** ([pyAgrum.UndiGraph](#) (page 121)) – a undirected graph
- **dag** ([pyAgrum.DAG](#) (page 119)) – a dag
- **bn** ([pyAgrum.BayesNet](#) (page 3)) – a BayesianNetwork
- **partial\_order** (*List [List [int]]*) – a partial order among the nodeIDs

**Returns** the current junction tree.

**Return type** [pyAgrum.CliqueGraph](#) (page 124)

**class** [pyAgrum.EssentialGraph](#)(\*args)  
 Proxy of C++ pyAgrum.EssentialGraph class.

**arcs** (*EssentialGraph self*)

**Returns** The list of arcs in the EssentialGraph

**Return type** list

**children** (*EssentialGraph self, int id*)

**Parameters** **id** (*int*) – the id of the parent

**Returns** the set of all the children

**Return type** Set

**connectedComponents** ()

connected components from a graph/BN

Compute the connected components of a pyAgrum's graph or Bayesian Network (more generally an object that has *nodes*, *children/parents* or *neighbours* methods)

The firstly visited node for each component is called a ‘root’ and is used as a key for the component. This root has been arbitrarily chosen during the algorithm.

**Parameters** **graph** (*pyAgrum's graph*) – A graph, a Bayesian network, more generally an object that has *nodes*, *children/parents* or *neighbours* methods in which the search will take place

**Returns** dict of connected components (as set of nodeIds (int)) with a nodeId (root) of each component as key.

**Return type** dict(int,Set[int])

**edges** (*EssentialGraph self*)

**Returns** the list of the edges

**Return type** List

**ids** ()

Deprecated method in pyAgrum>0.12.0. See nodes instead.

**mixedGraph** (*EssentialGraph self*)

**Returns** the mixed graph

**Return type** *pyAgrum.MixedGraph* (page 128)

**neighbours** (*EssentialGraph self, int id*)

**Parameters** **id** (*int*) – the id of the checked node

**Returns** The set of edges adjacent to the given node

**Return type** Set

**nodes** (*EssentialGraph self*)

**parents** (*EssentialGraph self, int id*)

**Parameters** **id** – The id of the child node

**Returns** the set of the parents ids.

**Return type** Set

**size** (*EssentialGraph self*)

**Returns** the number of nodes in the graph

**Return type** int

**sizeArcs** (*EssentialGraph self*)

**Returns** the number of arcs in the graph

**Return type** int

**sizeEdges** (*EssentialGraph self*)

**Returns** the number of edges in the graph

**Return type** int

**sizeNodes** (*EssentialGraph self*)

**Returns** the number of nodes in the graph

**Return type** int

**skeleton** (*EssentialGraph self*)

**toDot** (*EssentialGraph self*)

**Returns** a friendly display of the graph in DOT format

**Return type** str

**class** `pyAgrum.MarkovBlanket(*args)`

Proxy of C++ `pyAgrum.MarkovBlanket` class.

**arcs** (*MarkovBlanket self*)

**Returns** the list of the arcs

**Return type** List

**children** (*MarkovBlanket self, int id*)

**Parameters** `id (int)` – the id of the parent

**Returns** the set of all the children

**Return type** Set

**connectedComponents** ()

connected components from a graph/BN

Compute the connected components of a pyAgrum's graph or Bayesian Network (more generally an object that has `nodes`, `children/parents` or `neighbours` methods)

The firstly visited node for each component is called a ‘root’ and is used as a key for the component. This root has been arbitrarily chosen during the algorithm.

**Parameters** `graph (pyAgrum's graph)` – A graph, a Bayesian network, more generally an object that has `nodes`, `children/parents` or `neighbours` methods in which the search will take place

**Returns** dict of connected components (as set of nodeIds (int)) with a nodeId (root) of each component as key.

**Return type** dict(int,Set[int])

**dag** (*MarkovBlanket self*)

**Returns** a copy of the DAG

**Return type** [pyAgrum.DAG](#) (page 119)

**hasSameStructure** (*MarkovBlanket self, DAGmodel other*)

**Parameters** `pyAgrum.DAGmodel` – a direct acyclic model

**Returns** True if all the named node are the same and all the named arcs are the same

**Return type** bool

**nodes** (*MarkovBlanket self*)

**Returns** the set of ids

**Return type** set

**parents** (*MarkovBlanket self, int id*)

**Parameters** **id** – The id of the child node

**Returns** the set of the parents ids.

**Return type** Set

**size** (*MarkovBlanket self*)

**Returns** the number of nodes in the graph

**Return type** int

**sizeArcs** (*MarkovBlanket self*)

**Returns** the number of arcs in the graph

**Return type** int

**sizeNodes** (*MarkovBlanket self*)

**Returns** the number of nodes in the graph

**Return type** int

**toDot** (*MarkovBlanket self*)

**Returns** a friendly display of the graph in DOT format

**Return type** str

#### 1.2.4 Fragment of Bayesian networks

This class proposes a shallow copy of a part of Bayesian Network. It can be used as a Bayesian Network for inference algorithms (for instance).

**class** `pyAgrum.BayesNetFragment` (*bn: pyAgrum.IBayesNet*)  
 BayesNetFragment represents a part of a Bayesian Network (subset of nodes). By default, the arcs and the CPTs are the same as the BN but local CPTs can be build to express different local dependencies. All the non local CPTs are not copied. Therefore a BayesNetFragment is a light object.

**BayesNetFragment(BayesNet bn) -> BayesNetFragment**

**Parameters:**

- **bn** (*pyAgrum.BayesNet*) – the bn refered by the fragment

**addStructureListener** (*whenNodeAdded=None, whenNodeDeleted=None, whenArcAdded=None, whenArcDeleted=None*)

Add the listeners in parameters to the list of existing ones.

**Parameters**

- **whenNodeAdded** (*lambda expression*) – a function for when a node is added
- **whenNodeDeleted** (*lambda expression*) – a function for when a node is removed
- **whenArcAdded** (*lambda expression*) – a function for when an arc is added
- **whenArcDeleted** (*lambda expression*) – a function for when an arc is removed

**arcs** (*BayesNetFragment self*)

**Returns** The list of arcs in the IBayesNet

**Return type** list

**checkConsistency** (*BayesNetFragment self, int id*)

checkConsistency(BayesNetFragment self, str name) -> bool checkConsistency(BayesNetFragment self) -> bool

If a variable is added to the fragment but not its parents, there is no CPT consistant for this variable. This function checks the consistency for a variable of for all.

**Parameters** **n** (*int, str (optional)*) – the id or the name of the variable. If no argument, the function checks all the variables.

**Returns** True if the variable(s) is consistant.

**Return type** boolean

**Raises** gum.NotFound – if the node is not found.

**children** (*BayesNetFragment self, PyObject \* norid*)

**Parameters** **id** (*int*) – the id of the parent

**Returns** the set of all the children

**Return type** Set

**completeInstantiation** (*DAGmodel self*)

Get an instantiation over all the variables of the model.

**Returns** the complete instantiation

**Return type** pyAgrum.instantiation

**connectedComponents** ()

connected components from a graph/BN

Compute the connected components of a pyAgrum's graph or Bayesian Network (more generally an object that has *nodes*, *children/parents* or *neighbours* methods)

The firstly visited node for each component is called a ‘root’ and is used as a key for the component. This root has been arbitrarily chosen during the algorithm.

**Parameters** **graph** (*pyAgrum's graph*) – A graph, a Bayesian network, more generally an object that has *nodes*, *children/parents* or *neighbours* methods in which the search will take place

**Returns** dict of connected components (as set of nodeIds (int)) with a nodeId (root) of each component as key.

**Return type** dict(int,Set[int])

**cpt** (*BayesNetFragment self, int varId*)

cpt(BayesNetFragment self, str name) -> Potential

Returns the CPT of a variable.

**Parameters**

- **varId** (*int*) – A variable’s id in the pyAgrum.IBayesNet.
- **name** (*str*) – A variable’s name in the pyAgrum.IBayesNet.

**Returns** The variable’s CPT.

**Return type** *pyAgrum.Potential* (page 151)

**Raises** gum.NotFound – If no variable’s id matches varId.

**dag** (*BayesNetFragment self*)

**Returns** a constant reference to the dag of this BayesNet.

**Return type** *pyAgrum.DAG* (page 119)

**dim** (*IBayesNet self*)

Returns the dimension (the number of free parameters) in this BayesNet.

**Returns** the dimension of the BayesNet

**Return type** int

**empty** (*DAGmodel self*)

**Returns** True if the model is empty

**Return type** bool

**hasSameStructure** (*DAGmodel self, DAGmodel other*)

**Parameters** `pyAgrum.DAGmodel` – a direct acyclic model

**Returns** True if all the named node are the same and all the named arcs are the same

**Return type** bool

**idFromName** (*BayesNetFragment self, str name*)

Returns a variable's id given its name in the graph.

**Parameters** `name (str)` – The variable's name from which the id is returned.

**Returns** The variable's node id.

**Return type** int

**Raises** `gum.NotFound` – If name does not match a variable in the graph

**installAscendants** (*BayesNetFragment self, int id*)

`installAscendants(BayesNetFragment self, str name)`

Add the variable and all its ascendants in the fragment. No inconsistant node are created.

**Parameters** `n (int, str)` – the id or the name of the variable.

**Raises** `gum.NotFound` – if the node is not found.

**installCPT** (*BayesNetFragment self, int id, Potential pot*)

`installCPT(BayesNetFragment self, str name, Potential pot)`

Install a local CPT for a node. Doing so, it changes the parents of the node in the fragment.

**Parameters**

- `n (int, str)` – the id or the name of the variable.
- `pot (Potential (page 151))` – the Potential to install

**Raises** `gum.NotFound` – if the node is not found.

**installMarginal** (*BayesNetFragment self, int id, Potential pot*)

`installMarginal(BayesNetFragment self, str name, Potential pot)`

Install a local marginal for a node. Doing so, it removes the parents of the node in the fragment.

**Parameters**

- `n (int, str)` – the id or the name of the variable.
- `pot (Potential (page 151))` – the Potential (marginal) to install

**Raises** `gum.NotFound` – if the node is not found.

**installNode** (*BayesNetFragment self, int id*)

`installNode(BayesNetFragment self, str name)`

Add a node to the fragment. The arcs that can be added between installed nodes are created. No specific CPT are created. Then either the parents of the node are already in the fragment and the node is consistant, or the parents are not in the fragment and the node is not consistant.

**Parameters** `n (int, str)` – the id or the name of the variable.

**Raises** `gum.NotFound` – if the node is not found.

**isInstalledNode** (*BayesNetFragment self, int id*)  
`isInstalledNode(BayesNetFragment self, str name) -> bool`

Check if a node is in the fragment

**Parameters** `n (int, str)` – the id or the name of the variable.

**jointProbability** (*IBayesNet self, Instantiation i*)

**Parameters** `i (pyAgrum.instantiation)` – an instantiation of the variables

**Returns** a parameter of the joint probability for the BayesNet

**Return type** double

**Warning:** a variable not present in the instantiation is assumed to be instantiated to 0

**log10DomainSize** (*DAGmodel self*)

**Returns** The log10 domain size of the joint probability for the model.

**Return type** double

**log2JointProbability** (*IBayesNet self, Instantiation i*)

**Parameters** `i (pyAgrum.instantiation)` – an instantiation of the variables

**Returns** a parameter of the log joint probability for the BayesNet

**Return type** double

**Warning:** a variable not present in the instantiation is assumed to be instantiated to 0

**maxNonOneParam** (*IBayesNet self*)

**Returns** The biggest value (not equal to 1) in the CPTs of the BayesNet

**Return type** double

**maxParam** (*IBayesNet self*)

**Returns** the biggest value in the CPTs of the BayesNet

**Return type** double

**maxVarDomainSize** (*IBayesNet self*)

**Returns** the biggest domain size among the variables of the BayesNet

**Return type** int

**minNonZeroParam** (*IBayesNet self*)

**Returns** the smallest value (not equal to 0) in the CPTs of the IBayesNet

**Return type** double

**minParam** (*IBayesNet self*)

**Returns** the smallest value in the CPTs of the IBayesNet

**Return type** double

**minimalCondSet** (*BayesNetFragment self, int target, PyObject \* list*)

`minimalCondSet(BayesNetFragment self, PyObject * targets, PyObject * list) -> PyObject *`

Returns, given one or many targets and a list of variables, the minimal set of those needed to calculate the target/targets.

**Parameters**

- **target** (*int*) – The id of the target
- **targets** (*list*) – The ids of the targets
- **list** (*list*) – The list of available variables

**Returns** The minimal set of variables**Return type** Set**moralGraph** (*DAGmodel self, bool clear=True*)

Returns the moral graph of the BayesNet, formed by adding edges between all pairs of nodes that have a common child, and then making all edges in the graph undirected.

**Returns** The moral graph**Return type** *pyAgrum.UndiGraph* (page 121)**names** (*BayesNetFragment self*)**Returns** The names of the graph variables**Return type** list**nodeId** (*BayesNetFragment self, DiscreteVariable var*)**Parameters** **var** (*pyAgrum.DiscreteVariable* (page 133)) – a variable**Returns** the id of the variable**Return type** int**Raises** *gum.IndexError* – If the graph does not contain the variable**nodes** (*BayesNetFragment self*)**Returns** the set of ids**Return type** set**parents** (*BayesNetFragment self, PyObject \* norid*)**Parameters** **id** – The id of the child node**Returns** the set of the parents ids.**Return type** Set**property** (*DAGmodel self, str name*)**Warning:** Unreferenced function**propertyWithDefault** (*DAGmodel self, str name, str byDefault*)**Warning:** Unreferenced function**setProperty** (*DAGmodel self, str name, str value*)**Warning:** Unreferenced function**size** (*DAGmodel self*)

**Returns** the number of nodes in the graph

**Return type** int

**sizeArcs** (*DAGmodel self*)

**Returns** the number of arcs in the graph

**Return type** int

**toBN** (*BayesNetFragment self*)

Create a BayesNet from a fragment.

**Raises** gum.OperationNotAllowed – if the fragment is not consistent.

**toDot** (*BayesNetFragment self*)

**Returns** a friendly display of the graph in DOT format

**Return type** str

**topologicalOrder** (*DAGmodel self, bool clear=True*)

**Returns** the list of the nodes Ids in a topological order

**Return type** List

**Raises** gum.InvalidDirectedCycle – If this graph contains cycles

**uninstallCPT** (*BayesNetFragment self, int id*)

uninstallCPT(*BayesNetFragment self, str name*)

Remove a local CPT. The fragment can become inconsistent.

**Parameters** **n** (*int, str*) – the id or the name of the variable.

**Raises** gum.NotFound – if the node is not found.

**uninstallNode** (*BayesNetFragment self, int id*)

uninstallNode(*BayesNetFragment self, str name*)

Remove a node from the fragment. The fragment can become inconsistent.

**Parameters** **n** (*int, str*) – the id or the name of the variable.

**Raises** gum.NotFound – if the node is not found.

**variable** (*BayesNetFragment self, int id*)

variable(*BayesNetFragment self, str name*) -> DiscreteVariable

**Parameters**

- **id** (*int*) – a variable's id
- **name** (*str*) – a variable's name

**Returns** the variable

**Return type** *pyAgrum.DiscreteVariable* (page 133)

**Raises** gum.IndexError – If the graph does not contain the variable

**variableFromName** (*BayesNetFragment self, str name*)

**Parameters** **name** (*str*) – a variable's name

**Returns** the variable

**Return type** *pyAgrum.DiscreteVariable* (page 133)

**Raises** gum.IndexError – If the graph does not contain the variable

**variableNodeMap** (*BayesNetFragment self*)

**Returns** the variable node map

---

**Return type** pyAgrum.variableNodeMap

**whenArcAdded** (*BayesNetFragment self, void \*src, int \_from, int to*)

**whenArcDeleted** (*BayesNetFragment self, void \*src, int \_from, int to*)

**whenNodeAdded** (*BayesNetFragment self, void \*src, int id*)

**whenNodeDeleted** (*BayesNetFragment self, void \*src, int id*)

## 1.3 Inference

Inference is the process that consists in computing new probabilistic information from a Bayesian network and some evidence. aGrUM/pyAgrum mainly focus and the computation of (joint) posterior for some variables of the Bayesian networks given soft or hard evidence that are the form of likelihoods on some variables. Inference is a hard task (NP-complete). aGrUM/pyAgrum implements exact inference but also approximated inference that can converge slowly and (even) not exactly but that can in many cases be useful for applications.

## 1.4 Exact Inference

### 1.4.1 Lazy Propagation

Lazy Propagation is the main exact inference for classical Bayesian networks in aGrUM/pyAgrum.

**class** pyAgrum.LazyPropagation(\*args)  
Class used for Lazy Propagation

**LazyPropagation(bn) -> LazyPropagation**

**Parameters:**

- **bn** (*pyAgrum.BayesNet*) – a Bayesian network

**BN** (*LazyPropagation self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** pyAgrum.IBayesNet

**Raises** gum.UndefinedElement – If no Bayes net has been assigned to the inference.

**H** (*LazyPropagation self, int X*)

H(LazyPropagation self, str nodeName) -> double

**Parameters**

- **X** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**I** (*LazyPropagation self, int X, int Y*)

**Parameters**

- **X** (*int*) – a node Id
- **Y** (*int*) – another node Id

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**VI** (*LazyPropagation self, int X, int Y*)

### Parameters

- **x** (*int*) – a node Id
- **y** (*int*) – another node Id

**Returns** variation of information between X and Y

**Return type** double

### **addAllTargets** (*LazyPropagation self*)

Add all the nodes as targets.

### **addEvidence** (*LazyPropagation self, int id, int val*)

addEvidence(LazyPropagation self, str nodeName, int val) addEvidence(LazyPropagation self, int id, str val) addEvidence(LazyPropagation self, str nodeName, str val) addEvidence(LazyPropagation self, int id, Vector vals) addEvidence(LazyPropagation self, str nodeName, Vector vals)

Adds a new evidence on a node (might be soft or hard).

### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

### Raises

- gum.InvalidArgument – If the node already has an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

### **addJointTarget** (*LazyPropagation self, PyObject \*targets*)

Add a list of nodes as a new joint target. As a collateral effect, every node is added as a marginal target.

**Parameters** **list** – a list of names of nodes

**Raises** gum.UndefinedElement – If some node(s) do not belong to the Bayesian network

### **addTarget** (*LazyPropagation self, int target*)

addTarget(LazyPropagation self, str nodeName)

Add a marginal target to the list of targets.

### Parameters

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** gum.UndefinedElement – If target is not a NodeId in the Bayes net

### **chgEvidence** (*LazyPropagation self, int id, int val*)

chgEvidence(LazyPropagation self, str nodeName, int val) chgEvidence(LazyPropagation self, int id, str val) chgEvidence(LazyPropagation self, str nodeName, str val) chgEvidence(LazyPropagation self, int id, Vector vals) chgEvidence(LazyPropagation self, str nodeName, Vector vals)

Change the value of an already existing evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- `gum.InvalidArgument` – If the node does not already have an evidence
- `gum.InvalidArgument` – If val is not a value for the node
- `gum.InvalidArgument` – If the size of vals is different from the domain side of the node
- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

**`eraseAllEvidence` (*LazyPropagation self*)**

Removes all the evidence entered into the network.

**`eraseAllJointTargets` (*LazyPropagation self*)**

Clear all previously defined joint targets.

**`eraseAllMarginalTargets` (*LazyPropagation self*)**

Clear all the previously defined marginal targets.

**`eraseAllTargets` (*LazyPropagation self*)**

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**`eraseEvidence` (*LazyPropagation self, int id*)**

`eraseEvidence(LazyPropagation self, str nodeName)`

Remove the evidence, if any, corresponding to the node Id or name.

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**`eraseJointTarget` (*LazyPropagation self, PyObject \* targets*)**

Remove, if existing, the joint target.

**Parameters** **list** – a list of names or Ids of nodes

**Raises**

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**`eraseTarget` (*LazyPropagation self, int target*)**

`eraseTarget(LazyPropagation self, str nodeName)`

Remove, if existing, the marginal target.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

### Raises

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**evidenceImpact** (*LazyPropagation self, int target, PyObject \* evs*)

`evidenceImpact(LazyPropagation self, str target, Vector_string evs) -> Potential`

Create a pyAgrum.Potential for  $P(\text{targetlevs})$  (for all instantiation of target and evs)

### Parameters

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for  $P(\text{targetslevs})$

**Return type** `pyAgrum.Potential` (page 151)

**evidenceJointImpact** (*LazyPropagation self, PyObject \* targets, PyObject \* evs*)

`evidenceJointImpact(LazyPropagation self, Vector_string targets, Vector_string evs) -> Potential`

Create a pyAgrum.Potential for  $P(\text{joint targetslevs})$  (for all instantiation of targets and evs)

### Parameters

- **targets** – (int) a node Id
- **targets** – (str) a node name
- **evs** (*set*) – a set of nodes ids or names.

**Returns** a Potential for  $P(\text{targetlevs})$

**Return type** `pyAgrum.Potential` (page 151)

**Raises** `gum.Exception` – If some evidene entered into the Bayes net are incompatible  
(their joint proba = 0)

**evidenceProbability** (*LazyPropagation self*)

**Returns** the probability of evidence

**Return type** double

**hardEvidenceNodes** (*LazyPropagation self*)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*LazyPropagation self, int id*)

`hasEvidence(LazyPropagation self, str nodeName) -> bool`

### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasHardEvidence** (*LazyPropagation self, str nodeName*)

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence**Return type** bool**Raises** gum.IndexError – If the node does not belong to the Bayesian network**hasSoftEvidence** (*LazyPropagation self, int id*)hasSoftEvidence(*LazyPropagation self, str nodeName*) -> bool**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence**Return type** bool**Raises** gum.IndexError – If the node does not belong to the Bayesian network**isJointTarget** (*LazyPropagation self, PyObject \* targets*)**Parameters** **list** – a list of nodes ids or names.**Returns** True if target is a joint target.**Return type** bool**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**isTarget** (*LazyPropagation self, int variable*)isTarget(*LazyPropagation self, str nodeName*) -> bool**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target**Return type** bool**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**joinTree** (*LazyPropagation self*)**Returns** the current join tree used**Return type** [pyAgrum.CliqueGraph](#) (page 124)**jointMutualInformation** (*LazyPropagation self, PyObject \* targets*)**jointPosterior** (*LazyPropagation self, PyObject \* targets*)

Compute the joint posterior of a set of nodes.

**Parameters** **list** – the list of nodes whose posterior joint probability is wanted

**Warning:** The order of the variables given by the list here or when the jointTarget is declared can not be assumed to be used by the Potential.

**Returns** a ref to the posterior joint probability of the set of nodes.

**Return type** *pyAgrum.Potential* (page 151)

**Raises** `gum.UndefinedElement` – If an element of nodes is not in targets

**jointTargets** (*LazyPropagation self*)

**Returns** the list of target sets

**Return type** list

**junctionTree** (*LazyPropagation self*)

**Returns** the current junction tree

**Return type** *pyAgrum.CliqueGraph* (page 124)

**makeInference** (*LazyPropagation self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what makeInference should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**nbrEvidence** (*LazyPropagation self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*LazyPropagation self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrJointTargets** (*LazyPropagation self*)

**Returns** the number of joint targets

**Return type** int

**nbrSoftEvidence** (*LazyPropagation self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*LazyPropagation self*)

**Returns** the number of marginal targets

**Return type** int

**posterior** (*LazyPropagation self, int var*)

`posterior(LazyPropagation self, str nodeName) -> Potential`

Computes and returns the posterior of a node.

#### Parameters

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** `pyAgrum.Potential` (page 151)

**Raises** `gum.UndefinedElement` – If an element of nodes is not in targets

**setEvidence** (`evidces`)

Erase all the evidences and apply `addEvidence(key,value)` for every pairs in evidces.

**Parameters** `evidces` (`dict`) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**setFindBarrenNodesType** (`LazyPropagation self, pyAgrum.FindBarrenNodesType type`)

sets how we determine barren nodes

Barren nodes are unnecessary for probability inference, so they can be safely discarded in this case (`type = FIND_BARREN_NODES`). This speeds-up inference. However, there are some cases in which we do not want to remove barren nodes, typically when we want to answer queries such as Most Probable Explanations (MPE).

0 = FIND\_NO\_BARREN\_NODES 1 = FIND\_BARREN\_NODES

**Parameters** `type` (`int`) – the finder type

**Raises** `gum.InvalidArgument` – If type is not implemented

**setRelevantPotentialsFinderType** (`LazyPropagation self, pyAgrum.RelevantPotentialsFinderType type`)

sets how we determine the relevant potentials to combine

When a clique sends a message to a separator, it first constitute the set of the potentials it contains and of the potentials contained in the messages it received. If `RelevantPotentialsFinderType = FIND_ALL`, all these potentials are combined and projected to produce the message sent to the separator. If `RelevantPotentialsFinderType = DSEP_BAYESBALL_NODES`, then only the set of potentials d-connected to the variables of the separator are kept for combination and projection.

0 = FIND\_ALL 1 = DSEP\_BAYESBALL\_NODES 2 = DSEP\_BAYESBALL\_POTENTIALS 3 = DSEP\_KOLLER\_FRIEDMAN\_2009

**Parameters** `type` (`int`) – the finder type

**Raises** `gum.InvalidArgument` – If type is not implemented

**setTargets** (`targets`)

Remove all the targets and add the ones in parameter.

**Parameters** `targets` (`set`) – a set of targets

**Raises** `gum.UndefinedElement` – If one target is not in the Bayes net

**setTriangulation** (`LazyPropagation self, Triangulation new_triangulation`)

**softEvidenceNodes** (`LazyPropagation self`)

**Returns** the set of nodes with soft evidence

**Return type** set

**targets** (`LazyPropagation self`)

**Returns** the list of marginal targets

**Return type** list

**updateEvidence** (*evidces*)

Apply chgEvidence(key,value) for every pairs in evidces (or addEvidence).

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

## 1.4.2 Shafer Shenoy Inference

**class** pyAgrum.**ShaferShenoyInference** (\**args*)

Class used for Shafer-Shenoy inferences.

**ShaferShenoyInference**(*bn*) -> **ShaferShenoyInference**

**Parameters:**

- **bn** (*pyAgrum.BayesNet*) – a Bayesian network

**BN** (*ShaferShenoyInference self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** pyAgrum.IBayesNet

**Raises** gum.UndefinedElement – If no Bayes net has been assigned to the inference.

**H** (*ShaferShenoyInference self, int X*)

*H*(*ShaferShenoyInference self, str nodeName*) -> double

**Parameters**

- **X** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**I** (*ShaferShenoyInference self, int X, int Y*)

**Parameters**

- **X** (*int*) – a node Id
- **Y** (*int*) – another node Id

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**VI** (*ShaferShenoyInference self, int X, int Y*)

**Parameters**

- **X** (*int*) – a node Id
- **Y** (*int*) – another node Id

**Returns** variation of information between X and Y

**Return type** double

**addAllTargets** (*ShaferShenoyInference self*)

Add all the nodes as targets.

**addEvidence** (*ShaferShenoyInference self, int id, int val*)

```
addEvidence(ShaferShenoyInference self, str nodeName, int val) addEvidence(ShaferShenoyInference self, int id, str val) addEvidence(ShaferShenoyInference self, str nodeName, str val) addEvidence(ShaferShenoyInference self, int id, Vector vals) addEvidence(ShaferShenoyInference self, str nodeName, Vector vals)
```

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- `gum.InvalidArgument` – If the node already has an evidence
- `gum.InvalidArgument` – If val is not a value for the node
- `gum.InvalidArgument` – If the size of vals is different from the domain side of the node
- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

**addJointTarget** (*ShaferShenoyInference self, PyObject \*targets*)

Add a list of nodes as a new joint target. As a collateral effect, every node is added as a marginal target.

**Parameters** **list** – a list of names of nodes

**Raises** `gum.UndefinedElement` – If some node(s) do not belong to the Bayesian network

**addTarget** (*ShaferShenoyInference self, int target*)

```
addTarget(ShaferShenoyInference self, str nodeName)
```

Add a marginal target to the list of targets.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** `gum.UndefinedElement` – If target is not a NodeId in the Bayes net

**chgEvidence** (*ShaferShenoyInference self, int id, int val*)

```
chgEvidence(ShaferShenoyInference self, str nodeName, int val) chgEvidence(ShaferShenoyInference self, int id, str val) chgEvidence(ShaferShenoyInference self, str nodeName, str val) chgEvidence(ShaferShenoyInference self, int id, Vector vals) chgEvidence(ShaferShenoyInference self, str nodeName, Vector vals)
```

Change the value of an already existing evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value

- **val** – (str) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node does not already have an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**eraseAllEvidence** (*ShaferShenoyInference self*)

Removes all the evidence entered into the network.

**eraseAllJointTargets** (*ShaferShenoyInference self*)

Clear all previously defined joint targets.

**eraseAllMarginalTargets** (*ShaferShenoyInference self*)

Clear all the previously defined marginal targets.

**eraseAllTargets** (*ShaferShenoyInference self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**eraseEvidence** (*ShaferShenoyInference self, int id*)

eraseEvidence(*ShaferShenoyInference self, str nodeName*)

Remove the evidence, if any, corresponding to the node Id or name.

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**eraseJointTarget** (*ShaferShenoyInference self, PyObject \* targets*)

Remove, if existing, the joint target.

**Parameters** **list** – a list of names or Ids of nodes

**Raises**

- gum.IndexError – If one of the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**eraseTarget** (*ShaferShenoyInference self, int target*)

eraseTarget(*ShaferShenoyInference self, str nodeName*)

Remove, if existing, the marginal target.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises**

- gum.IndexError – If one of the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**evidenceImpact** (*ShaferShenoyInference self, int target, PyObject \* evs*)  
evidenceImpact(ShaferShenoyInference self, str target, Vector\_string evs) -> Potential  
Create a pyAgrum.Potential for P(targetlevs) (for all instantiation of target and evs)

**Parameters**

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for P(targetslevs)

**Return type** *pyAgrum.Potential* (page 151)

**evidenceJointImpact** (*ShaferShenoyInference self, PyObject \* targets, PyObject \* evs*)  
evidenceJointImpact(ShaferShenoyInference self, Vector\_string targets, Vector\_string evs) -> Potential

Create a pyAgrum.Potential for P(joint targetslevs) (for all instantiation of targets and evs)

**Parameters**

- **targets** – (int) a node Id
- **targets** – (str) a node name
- **evs** (*set*) – a set of nodes ids or names.

**Returns** a Potential for P(targetlevs)

**Return type** *pyAgrum.Potential* (page 151)

**Raises** *gum.Exception* – If some evidene entered into the Bayes net are incompatible  
(their joint proba = 0)

**evidenceProbability** (*ShaferShenoyInference self*)

**Returns** the probability of evidence

**Return type** double

**hardEvidenceNodes** (*ShaferShenoyInference self*)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*ShaferShenoyInference self, int id*)

hasEvidence(ShaferShenoyInference self, str nodeName) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** *gum.IndexError* – If the node does not belong to the Bayesian network

**hasHardEvidence** (*ShaferShenoyInference self, str nodeName*)

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*ShaferShenoyInference self, int id*)

hasSoftEvidence(*ShaferShenoyInference self, str nodeName*) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**isJointTarget** (*ShaferShenoyInference self, PyObject \* targets*)

**Parameters** **list** – a list of nodes ids or names.

**Returns** True if target is a joint target.

**Return type** bool

**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**isTarget** (*ShaferShenoyInference self, int variable*)

isTarget(*ShaferShenoyInference self, str nodeName*) -> bool

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**joinTree** (*ShaferShenoyInference self*)

**Returns** the current join tree used

**Return type** *pyAgrum.CliqueGraph* (page 124)

**jointMutualInformation** (*ShaferShenoyInference self, PyObject \* targets*)

**jointPosterior** (*ShaferShenoyInference self, PyObject \* targets*)

Compute the joint posterior of a set of nodes.

**Parameters** **list** – the list of nodes whose posterior joint probability is wanted

**Warning:** The order of the variables given by the list here or when the jointTarget is declared can not be assumed to be used by the Potential.

**Returns** a ref to the posterior joint probability of the set of nodes.

**Return type** *pyAgrum.Potential* (page 151)

**Raises** `gum.UndefinedElement` – If an element of nodes is not in targets

**jointTargets** (*ShaferShenoyInference self*)

**Returns** the list of target sets

**Return type** list

**junctionTree** (*ShaferShenoyInference self*)

**Returns** the current junction tree

**Return type** `pyAgrum.CliqueGraph` (page 124)

**makeInference** (*ShaferShenoyInference self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what makeInference should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**nbrEvidence** (*ShaferShenoyInference self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*ShaferShenoyInference self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrJointTargets** (*ShaferShenoyInference self*)

**Returns** the number of joint targets

**Return type** int

**nbrSoftEvidence** (*ShaferShenoyInference self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*ShaferShenoyInference self*)

**Returns** the number of marginal targets

**Return type** int

**posterior** (*ShaferShenoyInference self, int var*)

`posterior(ShaferShenoyInference self, str nodeName) -> Potential`

Computes and returns the posterior of a node.

**Parameters**

- **var** (`int`) – the node Id of the node for which we need a posterior probability
- **nodeName** (`str`) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** `pyAgrum.Potential` (page 151)

**Raises** `gum.UndefinedElement` – If an element of nodes is not in targets

**setEvidence** (*evidces*)

Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (`dict`) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**`setFindBarrenNodesType`** (*ShaferShenoyInference self, pyAgrum.FindBarrenNodesType type*)  
sets how we determine barren nodes

Barren nodes are unnecessary for probability inference, so they can be safely discarded in this case (`type = FIND_BARREN_NODES`). This speeds-up inference. However, there are some cases in which we do not want to remove barren nodes, typically when we want to answer queries such as Most Probable Explanations (MPE).

`0 = FIND_NO_BARREN_NODES 1 = FIND_BARREN_NODES`

**Parameters** `type` (*int*) – the finder type

**Raises** `gum.InvalidArgument` – If type is not implemented

**`setTargets`** (*targets*)

Remove all the targets and add the ones in parameter.

**Parameters** `targets` (*set*) – a set of targets

**Raises** `gum.UndefinedElement` – If one target is not in the Bayes net

**`setTriangulation`** (*ShaferShenoyInference self, Triangulation new\_triangulation*)

**`softEvidenceNodes`** (*ShaferShenoyInference self*)

**Returns** the set of nodes with soft evidence

**Return type** set

**`targets`** (*ShaferShenoyInference self*)

**Returns** the list of marginal targets

**Return type** list

**`updateEvidence`** (*evidces*)

Apply `chgEvidence(key,value)` for every pairs in evidces (or `addEvidence`).

**Parameters** `evidces` (*dict*) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

### 1.4.3 Variable Elimination

**`class pyAgrum.VariableElimination(*args)`**  
Class used for Variable Elimination inference algorithm.

**`VariableElimination(bn) -> VariableElimination`**

**Parameters:**

- `bn` (*pyAgrum.BayesNet*) – a Bayesian network

**`BN`** (*VariableElimination self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** pyAgrum.IBayesNet

**Raises** gum.UndefinedElement – If no Bayes net has been assigned to the inference.

**H** (*VariableElimination self, int X*)

H(*VariableElimination self, str nodeName*) -> double

**Parameters**

- **x** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**addAllTargets** (*VariableElimination self*)

Add all the nodes as targets.

**addEvidence** (*VariableElimination self, int id, int val*)

addEvidence(*VariableElimination self, str nodeName, int val*) addEvidence(*VariableElimination self, int id, str val*) addEvidence(*VariableElimination self, str nodeName, str val*) addEvidence(*VariableElimination self, int id, Vector vals*) addEvidence(*VariableElimination self, str nodeName, Vector vals*)

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node already has an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**addJointTarget** (*VariableElimination self, PyObject \* targets*)

Add a list of nodes as a new joint target. As a collateral effect, every node is added as a marginal target.

**Parameters** **list** – a list of names of nodes

**Raises** gum.UndefinedElement – If some node(s) do not belong to the Bayesian network

**addTarget** (*VariableElimination self, int target*)

addTarget(*VariableElimination self, str nodeName*)

Add a marginal target to the list of targets.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** `gum.UndefinedElement` – If target is not a NodeId in the Bayes net

**chgEvidence** (*VariableElimination self, int id, int val*)

`chgEvidence(VariableElimination self, str nodeName, int val)` `chgEvidence(VariableElimination self, int id, str val)` `chgEvidence(VariableElimination self, str nodeName, str val)` `chgEvidence(VariableElimination self, int id, Vector vals)` `chgEvidence(VariableElimination self, str nodeName, Vector vals)`

Change the value of an already existing evidence on a node (might be soft or hard).

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

#### Raises

- `gum.InvalidArgument` – If the node does not already have an evidence
- `gum.InvalidArgument` – If val is not a value for the node
- `gum.InvalidArgument` – If the size of vals is different from the domain side of the node
- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

**eraseAllEvidence** (*VariableElimination self*)

Removes all the evidence entered into the network.

**eraseAllTargets** (*VariableElimination self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**eraseEvidence** (*VariableElimination self, int id*)

`eraseEvidence(VariableElimination self, str nodeName)`

Remove the evidence, if any, corresponding to the node Id or name.

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**eraseJointTarget** (*VariableElimination self, PyObject \*targets*)

Remove, if existing, the joint target.

**Parameters** **list** – a list of names or Ids of nodes

#### Raises

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**eraseTarget** (*VariableElimination self, int target*)

`eraseTarget(VariableElimination self, str nodeName)`

Remove, if existing, the marginal target.

#### Parameters

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises**

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**evidenceImpact** (*VariableElimination self, int target, PyObject \* evs*)`evidenceImpact(VariableElimination self, str target, Vector_string evs) -> Potential`Create a pyAgrum.Potential for  $P(\text{target}|\text{evs})$  (for all instantiation of target and evs)**Parameters**

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.**Returns** a Potential for  $P(\text{targets}|\text{evs})$ **Return type** `pyAgrum.Potential` (page 151)**evidenceJointImpact** (*VariableElimination self, PyObject \* targets, PyObject \* evs*)Create a pyAgrum.Potential for  $P(\text{joint targets}|\text{evs})$  (for all instantiation of targets and evs)**Parameters**

- **targets** – (*int*) a node Id
- **targets** – (*str*) a node name
- **evs** (*set*) – a set of nodes ids or names.

**Returns** a Potential for  $P(\text{target}|\text{evs})$ **Return type** `pyAgrum.Potential` (page 151)**Raises** `gum.Exception` – If some evidene entered into the Bayes net are incompatible  
(their joint proba = 0)**hardEvidenceNodes** (*VariableElimination self*)**Returns** the set of nodes with hard evidence**Return type** set**hasEvidence** (*VariableElimination self, int id*)`hasEvidence(VariableElimination self, str nodeName) -> bool`**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence**Return type** bool**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network**hasHardEvidence** (*VariableElimination self, str nodeName*)**Parameters**

- **id** (*int*) – a node Id

- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*VariableElimination self, int id*)

hasSoftEvidence(*VariableElimination self, str nodeName*) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**isJointTarget** (*VariableElimination self, PyObject \* targets*)

**Parameters** **list** – a list of nodes ids or names.

**Returns** True if target is a joint target.

**Return type** bool

**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**isTarget** (*VariableElimination self, int variable*)

isTarget(*VariableElimination self, str nodeName*) -> bool

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**jointMutualInformation** (*VariableElimination self, PyObject \* targets*)

**jointPosterior** (*VariableElimination self, PyObject \* targets*)

Compute the joint posterior of a set of nodes.

**Parameters** **list** – the list of nodes whose posterior joint probability is wanted

**Warning:** The order of the variables given by the list here or when the jointTarget is declared can not be assumed to be used by the Potential.

**Returns** a ref to the posterior joint probability of the set of nodes.

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** gum.UndefinedElement – If an element of nodes is not in targets

**jointTargets** (*VariableElimination self*)

**Returns** the list of target sets

**Return type** list

**junctionTree** (*VariableElimination self, int id*)

**Returns** the current junction tree

**Return type** [pyAgrum.CliqueGraph](#) (page 124)

**makeInference** (*VariableElimination self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what makeInference should compute. Later, the computations of the posteriors can be done 'lightly' by multiplying and projecting those messages.

**nbrEvidence** (*VariableElimination self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*VariableElimination self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrSoftEvidence** (*VariableElimination self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*VariableElimination self*)

**Returns** the number of marginal targets

**Return type** int

**posterior** (*VariableElimination self, int var*)

posterior(*VariableElimination self, str nodeName*) -> Potential

Computes and returns the posterior of a node.

#### Parameters

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** `gum.UndefinedElement` – If an element of nodes is not in targets

**setEvidence** (*evidces*)

Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (*dict*) – a dict of evidences

#### Raises

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s

- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**setFindBarrenNodesType** (*VariableElimination self, pyAgrum.FindBarrenNodesType type*)  
sets how we determine barren nodes

Barren nodes are unnecessary for probability inference, so they can be safely discarded in this case (`type = FIND_BARREN_NODES`). This speeds-up inference. However, there are some cases in which we do not want to remove barren nodes, typically when we want to answer queries such as Most Probable Explanations (MPE).

0 = FIND\_NO\_BARREN\_NODES 1 = FIND\_BARREN\_NODES

**Parameters** `type` (*int*) – the finder type

**Raises** `gum.InvalidArgument` – If type is not implemented

**setRelevantPotentialsFinderType** (*VariableElimination self, pyAgrum.RelevantPotentialsFinderType type*)  
sets how we determine the relevant potentials to combine

When a clique sends a message to a separator, it first constitute the set of the potentials it contains and of the potentials contained in the messages it received. If `RelevantPotentialsFinderType = FIND_ALL`, all these potentials are combined and projected to produce the message sent to the separator. If `RelevantPotentialsFinderType = DSEP_BAYESBALL_NODES`, then only the set of potentials d-connected to the variables of the separator are kept for combination and projection.

0 = FIND\_ALL 1 = DSEP\_BAYESBALL\_NODES 2 = DSEP\_BAYESBALL\_POTENTIALS 3 = DSEP\_KOLLER\_FRIEDMAN\_2009

**Parameters** `type` (*int*) – the finder type

**Raises** `gum.InvalidArgument` – If type is not implemented

**setTargets** (*targets*)

Remove all the targets and add the ones in parameter.

**Parameters** `targets` (*set*) – a set of targets

**Raises** `gum.UndefinedElement` – If one target is not in the Bayes net

**setTriangulation** (*VariableElimination self, Triangulation new\_triangulation*)

**softEvidenceNodes** (*VariableElimination self*)

**Returns** the set of nodes with soft evidence

**Return type** set

**targets** (*VariableElimination self*)

**Returns** the list of marginal targets

**Return type** list

**updateEvidence** (*evidces*)

Apply `chgEvidence(key,value)` for every pairs in evidces (or `addEvidence`).

**Parameters** `evidces` (*dict*) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

## 1.5 Approximated Inference

### 1.5.1 Loopy Belief Propagation

**class** pyAgrum.**LoopyBeliefPropagation** (*bn*: pyAgrum.IBayesNet)

Class used for inferences using loopy belief propagation algorithm.

**LoopyBeliefPropagation**(*bn*) -> **LoopyBeliefPropagation**

**Parameters:**

- **bn** (pyAgrum.BayesNet) – a Bayesian network

**BN** (*LoopyBeliefPropagation self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** pyAgrum.IBayesNet

**Raises** gum.UndefinedElement – If no Bayes net has been assigned to the inference.

**H** (*LoopyBeliefPropagation self, int X*)

H(*LoopyBeliefPropagation self, str nodeName*) -> double

**Parameters**

- **x** (int) – a node Id
- **nodeName** (str) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**addAllTargets** (*LoopyBeliefPropagation self*)

Add all the nodes as targets.

**addEvidence** (*LoopyBeliefPropagation self, int id, int val*)

addEvidence(*LoopyBeliefPropagation self, str nodeName, int val*) addEvidence(*LoopyBeliefPropagation self, int id, str val*) addEvidence(*LoopyBeliefPropagation self, str nodeName, str val*) addEvidence(*LoopyBeliefPropagation self, int id, Vector vals*) addEvidence(*LoopyBeliefPropagation self, str nodeName, Vector vals*)

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (int) – a node Id
- **nodeName** (int) – a node name
- **val** – (int) a node value
- **val** – (str) the label of the node value
- **vals** (list) – a list of values

**Raises**

- gum.InvalidArgument – If the node already has an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**addTarget** (*LoopyBeliefPropagation self, int target*)  
 addTarget(*LoopyBeliefPropagation self, str nodeName*)

Add a marginal target to the list of targets.

#### Parameters

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** `gum.UndefinedElement` – If target is not a NodeId in the Bayes net

**chgEvidence** (*LoopyBeliefPropagation self, int id, int val*)

`chgEvidence(LoopyBeliefPropagation self, str nodeName, int val)` `chgEvidence(LoopyBeliefPropagation self, int id, str val)` `chgEvidence(LoopyBeliefPropagation self, str nodeName, str val)` `chgEvidence(LoopyBeliefPropagation self, int id, Vector vals)` `chgEvidence(LoopyBeliefPropagation self, str nodeName, Vector vals)`

Change the value of an already existing evidence on a node (might be soft or hard).

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

#### Raises

- `gum.InvalidArgument` – If the node does not already have an evidence
- `gum.InvalidArgument` – If val is not a value for the node
- `gum.InvalidArgument` – If the size of vals is different from the domain side of the node
- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

**currentTime** (*LoopyBeliefPropagation self*)

**Returns** get the current running time in second (double)

**Return type** double

**epsilon** (*LoopyBeliefPropagation self*)

**Returns** the value of epsilon

**Return type** double

**eraseAllEvidence** (*LoopyBeliefPropagation self*)

Removes all the evidence entered into the network.

**eraseAllTargets** (*LoopyBeliefPropagation self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**eraseEvidence** (*LoopyBeliefPropagation self, int id*)

`eraseEvidence(LoopyBeliefPropagation self, str nodeName)`

Remove the evidence, if any, corresponding to the node Id or name.

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**eraseTarget** (*LoopyBeliefPropagation self, int target*)  
`eraseTarget(LoopyBeliefPropagation self, str nodeName)`

Remove, if existing, the marginal target.

#### Parameters

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

#### Raises

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**evidenceImpact** (*LoopyBeliefPropagation self, int target, PyObject \* evs*)  
`evidenceImpact(LoopyBeliefPropagation self, str target, Vector_string evs) -> Potential`

Create a `pyAgrum.Potential` for  $P(\text{target}|\text{levs})$  (for all instantiation of target and evs)

#### Parameters

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for  $P(\text{targets}|\text{levs})$

**Return type** `pyAgrum.Potential` (page 151)

**hardEvidenceNodes** (*LoopyBeliefPropagation self*)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*LoopyBeliefPropagation self, int id*)

`hasEvidence(LoopyBeliefPropagation self, str nodeName) -> bool`

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasHardEvidence** (*LoopyBeliefPropagation self, str nodeName*)

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*LoopyBeliefPropagation self, int id*)  
`hasSoftEvidence(LoopyBeliefPropagation self, str nodeName) -> bool`

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**history** (*LoopyBeliefPropagation self*)

**Returns** the scheme history

**Return type** tuple

**Raises** `gum.OperationNotAllowed` – If the scheme did not performed or if verbosity is set to false

**isTarget** (*LoopyBeliefPropagation self, int variable*)

`isTarget(LoopyBeliefPropagation self, str nodeName) -> bool`

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- `gum.IndexError` – If the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**makeInference** (*LoopyBeliefPropagation self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what `makeInference` should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**maxIter** (*LoopyBeliefPropagation self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*LoopyBeliefPropagation self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*LoopyBeliefPropagation self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*LoopyBeliefPropagation self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrEvidence** (*LoopyBeliefPropagation self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*LoopyBeliefPropagation self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrIterations** (*LoopyBeliefPropagation self*)

**Returns** the number of iterations

**Return type** int

**nbrSoftEvidence** (*LoopyBeliefPropagation self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*LoopyBeliefPropagation self*)

**Returns** the number of marginal targets

**Return type** int

**periodSize** (*LoopyBeliefPropagation self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**posterior** (*LoopyBeliefPropagation self, int var*)

posterior(*LoopyBeliefPropagation self*, str *nodeName*) -> Potential

Computes and returns the posterior of a node.

#### Parameters

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** gum.UndefinedElement – If an element of nodes is not in targets

**setEpsilon** (*LoopyBeliefPropagation self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If eps<0

**setEvidence** (*evidces*)

Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (*dict*) – a dict of evidences

#### Raises

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s

- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**setMaxIter** (*LoopyBeliefPropagation self, int max*)

**Parameters** `max` (*int*) – the maximum number of iteration

**Raises** `gum.OutOfLowerBound` – If `max <= 1`

**setMaxTime** (*LoopyBeliefPropagation self, double timeout*)

**Parameters** `timeout` (*double*) – stopping criterion on timeout (in seconds)

**Raises** `gum.OutOfLowerBound` – If `timeout<=0.0`

**setMinEpsilonRate** (*LoopyBeliefPropagation self, double rate*)

**Parameters** `rate` (*double*) – the minimal epsilon rate

**setPeriodSize** (*LoopyBeliefPropagation self, int p*)

**Parameters** `p` (*int*) – number of samples between 2 stopping

**Raises** `gum.OutOfLowerBound` – If `p<1`

**setTargets** (*targets*)

Remove all the targets and add the ones in parameter.

**Parameters** `targets` (*set*) – a set of targets

**Raises** `gum.UndefinedElement` – If one target is not in the Bayes net

**setVerbosity** (*LoopyBeliefPropagation self, bool v*)

**Parameters** `v` (*bool*) – verbosity

**softEvidenceNodes** (*LoopyBeliefPropagation self*)

**Returns** the set of nodes with soft evidence

**Return type** set

**targets** (*LoopyBeliefPropagation self*)

**Returns** the list of marginal targets

**Return type** list

**updateEvidence** (*evidces*)

Apply chgEvidence(key,value) for every pairs in evidces (or addEvidence).

**Parameters** `evidces` (*dict*) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**verbosity** (*LoopyBeliefPropagation self*)

**Returns** True if the verbosity is enabled

**Return type** bool

## 1.5.2 Sampling

### Gibbs Sampling

**class** pyAgrum.**GibbsSampling** (*bn*: pyAgrum.IBayesNet)  
 Class for making Gibbs sampling inference in bayesian networks.

**GibbsSampling(bn) -> GibbsSampling**

**Parameters:**

- **bn** (pyAgrum.BayesNet) – a Bayesian network

**BN** (*GibbsSampling self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** pyAgrum.IBayesNet

**Raises** gum.UndefinedElement – If no Bayes net has been assigned to the inference.

**H** (*GibbsSampling self, int X*)

H(*GibbsSampling self, str nodeName*) -> double

**Parameters**

- **x** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**addAllTargets** (*GibbsSampling self*)

Add all the nodes as targets.

**addEvidence** (*GibbsSampling self, int id, int val*)

addEvidence(*GibbsSampling self, str nodeName, int val*) addEvidence(*GibbsSampling self, int id, str val*) addEvidence(*GibbsSampling self, str nodeName, str val*) addEvidence(*GibbsSampling self, int id, Vector vals*) addEvidence(*GibbsSampling self, str nodeName, Vector vals*)

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node already has an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**addTarget** (*GibbsSampling self, int target*)

addTarget(*GibbsSampling self, str nodeName*)

Add a marginal target to the list of targets.

### Parameters

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** `gum.UndefinedElement` – If target is not a NodeId in the Bayes net

**burnIn** (*GibbsSampling self*)

**Returns** size of burn in on number of iteration

**Return type** int

**chgEvidence** (*GibbsSampling self, int id, int val*)

`chgEvidence(GibbsSampling self, str nodeName, int val)` `chgEvidence(GibbsSampling self, int id, str val)` `chgEvidence(GibbsSampling self, str nodeName, str val)` `chgEvidence(GibbsSampling self, int id, Vector vals)` `chgEvidence(GibbsSampling self, str nodeName, Vector vals)`

Change the value of an already existing evidence on a node (might be soft or hard).

### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

### Raises

- `gum.InvalidArgument` – If the node does not already have an evidence
- `gum.InvalidArgument` – If val is not a value for the node
- `gum.InvalidArgument` – If the size of vals is different from the domain side of the node
- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

**currentPosterior** (*GibbsSampling self, int id*)

`currentPosterior(GibbsSampling self, str name)` -> Potential

Computes and returns the current posterior of a node.

### Parameters

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the current posterior probability of the node

**Return type** `pyAgrum.Potential` (page 151)

**Raises** `UndefinedElement` (page 237) – If an element of nodes is not in targets

**currentTime** (*GibbsSampling self*)

**Returns** get the current running time in second (double)

**Return type** double

**epsilon** (*GibbsSampling self*)

**Returns** the value of epsilon

**Return type** double

**eraseAllEvidence** (*GibbsSampling self*)

Removes all the evidence entered into the network.

**eraseAllTargets** (*GibbsSampling self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**eraseEvidence** (*GibbsSampling self, int id*)

`eraseEvidence(GibbsSampling self, str nodeName)`

Remove the evidence, if any, corresponding to the node Id or name.

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**eraseTarget** (*GibbsSampling self, int target*)

`eraseTarget(GibbsSampling self, str nodeName)`

Remove, if existing, the marginal target.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises**

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**evidenceImpact** (*GibbsSampling self, int target, PyObject \* evs*)

`evidenceImpact(GibbsSampling self, str target, Vector_string evs) -> Potential`

Create a `pyAgrum.Potential` for  $P(\text{target}|\text{levs})$  (for all instantiation of target and evs)

**Parameters**

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for  $P(\text{targets}|\text{levs})$

**Return type** `pyAgrum.Potential` (page 151)

**hardEvidenceNodes** (*GibbsSampling self*)

**Returns** the set of nodes with hard evidence

**Return type** `set`

**hasEvidence** (*GibbsSampling self, int id*)

`hasEvidence(GibbsSampling self, str nodeName) -> bool`

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**hasHardEvidence** (*GibbsSampling self, str nodeName*)

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*GibbsSampling self, int id*)

hasSoftEvidence(*GibbsSampling self, str nodeName*) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**history** (*GibbsSampling self*)

**Returns** the scheme history

**Return type** tuple

**Raises** gum.OperationNotAllowed – If the scheme did not performed or if verbosity is set to false

**isDrawnAtRandom** (*GibbsSampling self*)

**Returns** True if variables are drawn at random

**Return type** bool

**isTarget** (*GibbsSampling self, int variable*)

isTarget(*GibbsSampling self, str nodeName*) -> bool

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**makeInference** (*GibbsSampling self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what makeInference should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**maxIter** (*GibbsSampling self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*GibbsSampling self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*GibbsSampling self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*GibbsSampling self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrDrawnVar** (*GibbsSampling self*)

**Returns** the number of variable drawn at each iteration

**Return type** int

**nbrEvidence** (*GibbsSampling self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*GibbsSampling self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrIterations** (*GibbsSampling self*)

**Returns** the number of iterations

**Return type** int

**nbrSoftEvidence** (*GibbsSampling self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*GibbsSampling self*)

**Returns** the number of marginal targets

**Return type** int

**periodSize** (*GibbsSampling self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**posterior** (*GibbsSampling self, int var*)

posterior(GibbsSampling self, str nodeName) -> Potential

Computes and returns the posterior of a node.

#### Parameters

- **var** (*int*) – the node Id of the node for which we need a posterior probability

- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** *pyAgrum.Potential* (page 151)

**Raises** `gum.UndefinedElement` – If an element of nodes is not in targets

**setBurnIn** (*GibbsSampling self, int b*)

**Parameters** **b** (*int*) – size of burn in on number of iteration

**setDrawnAtRandom** (*GibbsSampling self, bool \_atRandom*)

**Parameters** **\_atRandom** (*bool*) – indicates if variables should be drawn at random

**setEpsilon** (*GibbsSampling self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** `gum.OutOfLowerBound` – If `eps < 0`

**setEvidence** (*evidces*)

Erase all the evidences and apply `addEvidence(key,value)` for every pairs in evidces.

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**setMaxIter** (*GibbsSampling self, int max*)

**Parameters** **max** (*int*) – the maximum number of iteration

**Raises** `gum.OutOfLowerBound` – If `max <= 1`

**setMaxTime** (*GibbsSampling self, double timeout*)

**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)

**Raises** `gum.OutOfLowerBound` – If `timeout <= 0.0`

**setMinEpsilonRate** (*GibbsSampling self, double rate*)

**Parameters** **rate** (*double*) – the minimal epsilon rate

**setNbrDrawnVar** (*GibbsSampling self, int \_nbr*)

**Parameters** **\_nbr** (*int*) – the number of variables to be drawn at each iteration

**setPeriodSize** (*GibbsSampling self, int p*)

**Parameters** **p** (*int*) – number of samples between 2 stopping

**Raises** `gum.OutOfLowerBound` – If `p < 1`

**setTargets** (*targets*)

Remove all the targets and add the ones in parameter.

**Parameters** **targets** (*set*) – a set of targets

**Raises** `gum.UndefinedElement` – If one target is not in the Bayes net

**setVerbosity** (*GibbsSampling self, bool v*)

**Parameters** **v** (*bool*) – verbosity

**softEvidenceNodes** (*GibbsSampling self*)

**Returns** the set of nodes with soft evidence

**Return type** set

**targets** (*GibbsSampling self*)

**Returns** the list of marginal targets

**Return type** list

**updateEvidence** (*evidces*)

Apply chgEvidence(key,value) for every pairs in evidces (or addEvidence).

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

**verbosity** (*GibbsSampling self*)

**Returns** True if the verbosity is enabled

**Return type** bool

## Monte Carlo Sampling

**class** pyAgrum.MonteCarloSampling (*bn: pyAgrum.IBayesNet*)

Class used for Monte Carlo sampling inference algorithm.

**MonteCarloSampling**(*bn*) -> **MonteCarloSampling**

**Parameters:**

- **bn** (*pyAgrum.BayesNet*) – a Bayesian network

**BN** (*MonteCarloSampling self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** pyAgrum.IBayesNet

**Raises** gum.UndefinedElement – If no Bayes net has been assigned to the inference.

**H** (*MonteCarloSampling self, int X*)

H(*MonteCarloSampling self, str nodeName*) -> double

**Parameters**

- **X** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**addAllTargets** (*MonteCarloSampling self*)

Add all the nodes as targets.

**addEvidence** (*MonteCarloSampling self, int id, int val*)

addEvidence(MonteCarloSampling self, str nodeName, int val) addEvidence(MonteCarloSampling self, int id, str val) addEvidence(MonteCarloSampling self, str nodeName, str val) addEvidence(MonteCarloSampling self, int id, Vector vals) addEvidence(MonteCarloSampling self, str nodeName, Vector vals)

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (int) a node value
- **val** – (str) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node already has an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**addTarget** (*MonteCarloSampling self, int target*)

addTarget(MonteCarloSampling self, str nodeName)

Add a marginal target to the list of targets.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** gum.UndefinedElement – If target is not a NodeId in the Bayes net

**chgEvidence** (*MonteCarloSampling self, int id, int val*)

chgEvidence(MonteCarloSampling self, str nodeName, int val) chgEvidence(MonteCarloSampling self, int id, str val) chgEvidence(MonteCarloSampling self, str nodeName, str val) chgEvidence(MonteCarloSampling self, int id, Vector vals) chgEvidence(MonteCarloSampling self, str nodeName, Vector vals)

Change the value of an already existing evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (int) a node value
- **val** – (str) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node does not already have an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node

- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

**`currentPosterior`** (*MonteCarloSampling self, int id*)currentPosterior(*MonteCarloSampling self, str name*) -> *Potential*

Computes and returns the current posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the current posterior probability of the node**Return type** *pyAgrum.Potential* (page 151)**Raises** *UndefinedElement* (page 237) – If an element of nodes is not in targets**`currentTime`** (*MonteCarloSampling self*)**Returns** get the current running time in second (double)**Return type** double**`epsilon`** (*MonteCarloSampling self*)**Returns** the value of epsilon**Return type** double**`eraseAllEvidence`** (*MonteCarloSampling self*)

Removes all the evidence entered into the network.

**`eraseAllTargets`** (*MonteCarloSampling self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**`eraseEvidence`** (*MonteCarloSampling self, int id*)eraseEvidence(*MonteCarloSampling self, str nodeName*)

Remove the evidence, if any, corresponding to the node Id or name.

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** *gum.IndexError* – If the node does not belong to the Bayesian network**`eraseTarget`** (*MonteCarloSampling self, int target*)eraseTarget(*MonteCarloSampling self, str nodeName*)

Remove, if existing, the marginal target.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises**

- *gum.IndexError* – If one of the node does not belong to the Bayesian network
- *gum.UndefinedElement* – If node Id is not in the Bayesian network

**evidenceImpact** (*MonteCarloSampling self, int target, PyObject \* evs*)  
evidenceImpact(MonteCarloSampling self, str target, Vector\_string evs) -> Potential  
Create a pyAgrum.Potential for P(targetlevs) (for all instantiation of target and evs)

**Parameters**

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for P(targetslevs)

**Return type** *pyAgrum.Potential* (page 151)

**hardEvidenceNodes** (*MonteCarloSampling self*)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*MonteCarloSampling self, int id*)

hasEvidence(MonteCarloSampling self, str nodeName) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** *gum.IndexError* – If the node does not belong to the Bayesian network

**hasHardEvidence** (*MonteCarloSampling self, str nodeName*)

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** *gum.IndexError* – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*MonteCarloSampling self, int id*)

hasSoftEvidence(MonteCarloSampling self, str nodeName) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** *gum.IndexError* – If the node does not belong to the Bayesian network

**history** (*MonteCarloSampling self*)

**Returns** the scheme history

**Return type** tuple

**Raises** `gum.OperationNotAllowed` – If the scheme did not performed or if verbosity is set to false

**isTarget** (*MonteCarloSampling self, int variable*)  
`isTarget(MonteCarloSampling self, str nodeName) -> bool`

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- `gum.IndexError` – If the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**makeInference** (*MonteCarloSampling self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what `makeInference` should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**maxIter** (*MonteCarloSampling self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*MonteCarloSampling self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*MonteCarloSampling self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*MonteCarloSampling self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrEvidence** (*MonteCarloSampling self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*MonteCarloSampling self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrIterations** (*MonteCarloSampling self*)

**Returns** the number of iterations

**Return type** int

**nbrSoftEvidence** (*MonteCarloSampling self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*MonteCarloSampling self*)

**Returns** the number of marginal targets

**Return type** int

**periodSize** (*MonteCarloSampling self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**posterior** (*MonteCarloSampling self, int var*)

posterior(*MonteCarloSampling self, str nodeName*) -> Potential

Computes and returns the posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** gum.UndefinedElement – If an element of nodes is not in targets

**setEpsilon** (*MonteCarloSampling self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If eps<0

**setEvidence** (*evidces*)

Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

**setMaxIter** (*MonteCarloSampling self, int max*)

**Parameters** **max** (*int*) – the maximum number of iteration

**Raises** gum.OutOfLowerBound – If max <= 1

**setMaxTime** (*MonteCarloSampling self, double timeout*)

**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)

**Raises** gum.OutOfLowerBound – If timeout<=0.0

**setMinEpsilonRate** (*MonteCarloSampling self, double rate*)

**Parameters** **rate** (*double*) – the minimal epsilon rate

**setPeriodSize** (*MonteCarloSampling self, int p*)

**Parameters** **p** (*int*) – number of samples between 2 stopping

**Raises** gum.OutOfLowerBound – If p<1

**setTargets** (*targets*)

Remove all the targets and add the ones in parameter.

**Parameters** **targets** (*set*) – a set of targets

**Raises** gum.UndefinedElement – If one target is not in the Bayes net

**setVerbosity** (*MonteCarloSampling self, bool v*)

**Parameters** **v** (*bool*) – verbosity

**softEvidenceNodes** (*MonteCarloSampling self*)

**Returns** the set of nodes with soft evidence

**Return type** set

**targets** (*MonteCarloSampling self*)

**Returns** the list of marginal targets

**Return type** list

**updateEvidence** (*evidces*)

Apply chgEvidence(key,value) for every pairs in evidces (or addEvidence).

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

**verbosity** (*MonteCarloSampling self*)

**Returns** True if the verbosity is enabled

**Return type** bool

## Weighted Sampling

### **class** pyAgrum.**WeightedSampling** (*bn: pyAgrum.IBayesNet*)

Class used for Weighted sampling inference algorithm.

#### **WeightedSampling**(*bn*) -> **WeightedSampling**

**Parameters:**

- **bn** (*pyAgrum.BayesNet*) – a Bayesian network

#### **BN** (*WeightedSampling self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** pyAgrum.IBayesNet

**Raises** gum.UndefinedElement – If no Bayes net has been assigned to the inference.

#### **H** (*WeightedSampling self, int X*)

**H**(WeightedSampling self, str nodeName) -> double

**Parameters**

- **x** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**addAllTargets** (*WeightedSampling self*)

Add all the nodes as targets.

**addEvidence** (*WeightedSampling self, int id, int val*)

addEvidence(*WeightedSampling self, str nodeName, int val*) addEvidence(*WeightedSampling self, int id, str val*) addEvidence(*WeightedSampling self, str nodeName, str val*) addEvidence(*WeightedSampling self, int id, Vector vals*) addEvidence(*WeightedSampling self, str nodeName, Vector vals*)

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- `gum.InvalidArgument` – If the node already has an evidence
- `gum.InvalidArgument` – If val is not a value for the node
- `gum.InvalidArgument` – If the size of vals is different from the domain side of the node
- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

**addTarget** (*WeightedSampling self, int target*)

addTarget(*WeightedSampling self, str nodeName*)

Add a marginal target to the list of targets.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** `gum.UndefinedElement` – If target is not a NodeId in the Bayes net

**chgEvidence** (*WeightedSampling self, int id, int val*)

chgEvidence(*WeightedSampling self, str nodeName, int val*) chgEvidence(*WeightedSampling self, int id, str val*) chgEvidence(*WeightedSampling self, str nodeName, str val*) chgEvidence(*WeightedSampling self, int id, Vector vals*) chgEvidence(*WeightedSampling self, str nodeName, Vector vals*)

Change the value of an already existing evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node does not already have an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**currentPosterior** (*WeightedSampling self, int id*)currentPosterior(*WeightedSampling self, str name*) -> Potential

Computes and returns the current posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the current posterior probability of the node**Return type** *pyAgrum.Potential* (page 151)**Raises** *UndefinedElement* (page 237) – If an element of nodes is not in targets**currentTime** (*WeightedSampling self*)**Returns** get the current running time in second (double)**Return type** double**epsilon** (*WeightedSampling self*)**Returns** the value of epsilon**Return type** double**eraseAllEvidence** (*WeightedSampling self*)

Removes all the evidence entered into the network.

**eraseAllTargets** (*WeightedSampling self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**eraseEvidence** (*WeightedSampling self, int id*)eraseEvidence(*WeightedSampling self, str nodeName*)

Remove the evidence, if any, corresponding to the node Id or name.

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** gum.IndexError – If the node does not belong to the Bayesian network**eraseTarget** (*WeightedSampling self, int target*)eraseTarget(*WeightedSampling self, str nodeName*)

Remove, if existing, the marginal target.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises**

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**evidenceImpact** (*WeightedSampling self, int target, PyObject \* evs*)

`evidenceImpact(WeightedSampling self, str target, Vector_string evs) -> Potential`

Create a pyAgrum.Potential for  $P(\text{targetlevs})$  (for all instantiation of target and evs)

**Parameters**

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for  $P(\text{targetslevs})$

**Return type** `pyAgrum.Potential` (page 151)

**hardEvidenceNodes** (*WeightedSampling self*)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*WeightedSampling self, int id*)

`hasEvidence(WeightedSampling self, str nodeName) -> bool`

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasHardEvidence** (*WeightedSampling self, str nodeName*)

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*WeightedSampling self, int id*)

`hasSoftEvidence(WeightedSampling self, str nodeName) -> bool`

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**history** (*WeightedSampling self*)

**Returns** the scheme history

**Return type** tuple

**Raises** gum.OperationNotAllowed – If the scheme did not performed or if verbosity is set to false

**isTarget** (*WeightedSampling self, int variable*)  
 isTarget(*WeightedSampling self, str nodeName*) -> bool

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**makeInference** (*WeightedSampling self*)  
 Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what makeInference should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**maxIter** (*WeightedSampling self*)  
**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*WeightedSampling self*)  
**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*WeightedSampling self*)  
**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*WeightedSampling self*)  
**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrEvidence** (*WeightedSampling self*)  
**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*WeightedSampling self*)  
**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrIterations** (*WeightedSampling self*)  
**Returns** the number of iterations

**Return type** int

**nbrSoftEvidence** (*WeightedSampling self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*WeightedSampling self*)

**Returns** the number of marginal targets

**Return type** int

**periodSize** (*WeightedSampling self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**posterior** (*WeightedSampling self, int var*)

posterior(*WeightedSampling self*, str *nodeName*) -> Potential

Computes and returns the posterior of a node.

**Parameters**

- **var** (int) – the node Id of the node for which we need a posterior probability
- **nodeName** (str) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** *pyAgrum.Potential* (page 151)

**Raises** gum.UndefinedElement – If an element of nodes is not in targets

**setEpsilon** (*WeightedSampling self, double eps*)

**Parameters** **eps** (double) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If eps<0

**setEvidence** (*evidces*)

Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (dict) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

**setMaxIter** (*WeightedSampling self, int max*)

**Parameters** **max** (int) – the maximum number of iteration

**Raises** gum.OutOfLowerBound – If max <= 1

**setMaxTime** (*WeightedSampling self, double timeout*)

**Parameters** **timeout** (double) – stopping criterion on timeout (in seconds)

**Raises** gum.OutOfLowerBound – If timeout<=0.0

**setMinEpsilonRate** (*WeightedSampling self, double rate*)

**Parameters** **rate** (double) – the minimal epsilon rate

**setPeriodSize** (*WeightedSampling self, int p*)

---

**Parameters** **p** (*int*) – number of samples between 2 stopping

**Raises** `gum.OutOfLowerBound` – If  $p < 1$

**setTargets** (*targets*)  
Remove all the targets and add the ones in parameter.

**Parameters** **targets** (*set*) – a set of targets

**Raises** `gum.UndefinedElement` – If one target is not in the Bayes net

**setVerbosity** (*WeightedSampling self, bool v*)  
**Parameters** **v** (*bool*) – verbosity

**softEvidenceNodes** (*WeightedSampling self*)  
**Returns** the set of nodes with soft evidence

**Return type** set

**targets** (*WeightedSampling self*)  
**Returns** the list of marginal targets

**Return type** list

**updateEvidence** (*evidces*)  
Apply `chgEvidence(key,value)` for every pairs in evidces (or `addEvidence`).

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**verbosity** (*WeightedSampling self*)  
**Returns** True if the verbosity is enabled

**Return type** bool

## Importance Sampling

**class** `pyAgrum.ImportanceSampling (bn: pyAgrum.IBayesNet)`

Class used for inferences using the Importance Sampling algorithm.

**ImportanceSampling(bn) -> ImportanceSampling**

**Parameters:**

- **bn** (`pyAgrum.BayesNet`) – a Bayesian network

**BN** (*ImportanceSampling self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** `pyAgrum.IBayesNet`

**Raises** `gum.UndefinedElement` – If no Bayes net has been assigned to the inference.

**H** (*ImportanceSampling self, int X*)

`H(ImportanceSampling self, str nodeName) -> double`

**Parameters**

- **x** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

#### **addAllTargets** (*ImportanceSampling self*)

Add all the nodes as targets.

#### **addEvidence** (*ImportanceSampling self, int id, int val*)

addEvidence(*ImportanceSampling self, str nodeName, int val*) addEvidence(*ImportanceSampling self, int id, str val*) addEvidence(*ImportanceSampling self, str nodeName, str val*) addEvidence(*ImportanceSampling self, int id, Vector vals*) addEvidence(*ImportanceSampling self, str nodeName, Vector vals*)

Adds a new evidence on a node (might be soft or hard).

#### **Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (int) a node value
- **val** – (str) the label of the node value
- **vals** (*list*) – a list of values

#### **Raises**

- `gum.InvalidArgument` – If the node already has an evidence
- `gum.InvalidArgument` – If val is not a value for the node
- `gum.InvalidArgument` – If the size of vals is different from the domain side of the node
- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

#### **addTarget** (*ImportanceSampling self, int target*)

addTarget(*ImportanceSampling self, str nodeName*)

Add a marginal target to the list of targets.

#### **Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** `gum.UndefinedElement` – If target is not a NodeId in the Bayes net

#### **chgEvidence** (*ImportanceSampling self, int id, int val*)

chgEvidence(*ImportanceSampling self, str nodeName, int val*) chgEvidence(*ImportanceSampling self, int id, str val*) chgEvidence(*ImportanceSampling self, str nodeName, str val*) chgEvidence(*ImportanceSampling self, int id, Vector vals*) chgEvidence(*ImportanceSampling self, str nodeName, Vector vals*)

Change the value of an already existing evidence on a node (might be soft or hard).

#### **Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (int) a node value
- **val** – (str) the label of the node value

- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node does not already have an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**currentPosterior** (*ImportanceSampling self, int id*)currentPosterior(*ImportanceSampling self, str name*) -> Potential

Computes and returns the current posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the current posterior probability of the node**Return type** *pyAgrum.Potential* (page 151)**Raises** *UndefinedElement* (page 237) – If an element of nodes is not in targets**currentTime** (*ImportanceSampling self*)**Returns** get the current running time in second (double)**Return type** double**epsilon** (*ImportanceSampling self*)**Returns** the value of epsilon**Return type** double**eraseAllEvidence** (*ImportanceSampling self*)

Removes all the evidence entered into the network.

**eraseAllTargets** (*ImportanceSampling self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**eraseEvidence** (*ImportanceSampling self, int id*)eraseEvidence(*ImportanceSampling self, str nodeName*)

Remove the evidence, if any, corresponding to the node Id or name.

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** gum.IndexError – If the node does not belong to the Bayesian network**eraseTarget** (*ImportanceSampling self, int target*)eraseTarget(*ImportanceSampling self, str nodeName*)

Remove, if existing, the marginal target.

**Parameters**

- **target** (*int*) – a node Id

- **nodeName** (*int*) – a node name

**Raises**

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**evidenceImpact** (*ImportanceSampling self, int target, PyObject \* evs*)

`evidenceImpact(ImportanceSampling self, str target, Vector_string evs)` -> Potential

Create a `pyAgrum.Potential` for  $P(\text{target}|\text{levs})$  (for all instantiation of target and evs)

**Parameters**

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for  $P(\text{targets}|\text{levs})$

**Return type** `pyAgrum.Potential` (page 151)

**hardEvidenceNodes** (*ImportanceSampling self*)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*ImportanceSampling self, int id*)

`hasEvidence(ImportanceSampling self, str nodeName)` -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasHardEvidence** (*ImportanceSampling self, str nodeName*)

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*ImportanceSampling self, int id*)

`hasSoftEvidence(ImportanceSampling self, str nodeName)` -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**history** (*ImportanceSampling self*)

**Returns** the scheme history

**Return type** tuple

**Raises** `gum.OperationNotAllowed` – If the scheme did not performed or if verbosity is set to false

**isTarget** (*ImportanceSampling self, int variable*)  
`isTarget(ImportanceSampling self, str nodeName) -> bool`

**Parameters**

- **variable** (`int`) – a node Id
- **nodeName** (`str`) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- `gum.IndexError` – If the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**makeInference** (*ImportanceSampling self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what `makeInference` should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**maxIter** (*ImportanceSampling self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*ImportanceSampling self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*ImportanceSampling self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*ImportanceSampling self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrEvidence** (*ImportanceSampling self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*ImportanceSampling self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrIterations** (*ImportanceSampling self*)

**Returns** the number of iterations

**Return type** int

**nbrSoftEvidence** (*ImportanceSampling self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*ImportanceSampling self*)

**Returns** the number of marginal targets

**Return type** int

**periodSize** (*ImportanceSampling self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**posterior** (*ImportanceSampling self, int var*)

posterior(*ImportanceSampling self, str nodeName*) -> Potential

Computes and returns the posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** gum.UndefinedElement – If an element of nodes is not in targets

**setEpsilon** (*ImportanceSampling self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If eps<0

**setEvidence** (*evidces*)

Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

**setMaxIter** (*ImportanceSampling self, int max*)

**Parameters** **max** (*int*) – the maximum number of iteration

**Raises** gum.OutOfLowerBound – If max <= 1

**setMaxTime** (*ImportanceSampling self, double timeout*)

**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)

**Raises** gum.OutOfLowerBound – If timeout<=0.0

**setMinEpsilonRate** (*ImportanceSampling self, double rate*)

**Parameters** `rate` (*double*) – the minimal epsilon rate

**setPeriodSize** (*ImportanceSampling self, int p*)

**Parameters** `p` (*int*) – number of samples between 2 stopping

**Raises** `gum.OutOfLowerBound` – If `p < 1`

**setTargets** (*targets*)

**Returns** Remove all the targets and add the ones in parameter.

**Parameters** `targets` (*set*) – a set of targets

**Raises** `gum.UndefinedElement` – If one target is not in the Bayes net

**setVerbosity** (*ImportanceSampling self, bool v*)

**Parameters** `v` (*bool*) – verbosity

**softEvidenceNodes** (*ImportanceSampling self*)

**Returns** the set of nodes with soft evidence

**Return type** set

**targets** (*ImportanceSampling self*)

**Returns** the list of marginal targets

**Return type** list

**updateEvidence** (*evidces*)

Apply `chgEvidence(key,value)` for every pairs in `evidces` (or `addEvidence`).

**Parameters** `evidces` (*dict*) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**verbosity** (*ImportanceSampling self*)

**Returns** True if the verbosity is enabled

**Return type** bool

### 1.5.3 Loopy sampling

#### Loopy Gibbs Sampling

**class** `pyAgrum.LoopyGibbsSampling` (*bn: pyAgrum.IBayesNet*)  
 Class used for inferences using a loopy version of Gibbs sampling.

**LoopyGibbsSampling(bn) -> LoopyGibbsSampling**

**Parameters:**

- `bn` (*pyAgrum.BayesNet*) – a Bayesian network

**BN** (*LoopyGibbsSampling self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** `pyAgrum.IBayesNet`

**Raises** `gum.UndefinedElement` – If no Bayes net has been assigned to the inference.

**H** (*LoopyGibbsSampling self, int X*)  
 H(LoopyGibbsSampling self, str nodeName) -> double

**Parameters**

- **x** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**addAllTargets** (*LoopyGibbsSampling self*)

Add all the nodes as targets.

**addEvidence** (*LoopyGibbsSampling self, int id, int val*)

addEvidence(LoopyGibbsSampling self, str nodeName, int val) addEvidence(LoopyGibbsSampling self, int id, str val) addEvidence(LoopyGibbsSampling self, str nodeName, str val) addEvidence(LoopyGibbsSampling self, int id, Vector vals) addEvidence(LoopyGibbsSampling self, str nodeName, Vector vals)

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (int) a node value
- **val** – (str) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node already has an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**addTarget** (*LoopyGibbsSampling self, int target*)

addTarget(LoopyGibbsSampling self, str nodeName)

Add a marginal target to the list of targets.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** gum.UndefinedElement – If target is not a NodeId in the Bayes net

**burnIn** (*LoopyGibbsSampling self*)

**Returns** size of burn in on number of iteration

**Return type** int

**chgEvidence** (*LoopyGibbsSampling self, int id, int val*)

chgEvidence(LoopyGibbsSampling self, str nodeName, int val) chgEvidence(LoopyGibbsSampling self, int id, str val) chgEvidence(LoopyGibbsSampling self, str nodeName, str val) chgEvidence(LoopyGibbsSampling self, int id, Vector vals) chgEvidence(LoopyGibbsSampling self, str nodeName, Vector vals)

Change the value of an already existing evidence on a node (might be soft or hard).

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

#### Raises

- `gum.InvalidArgument` – If the node does not already have an evidence
- `gum.InvalidArgument` – If val is not a value for the node
- `gum.InvalidArgument` – If the size of vals is different from the domain side of the node
- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

#### **currentPosterior** (*LoopyGibbsSampling self, int id*)

`currentPosterior(LoopyGibbsSampling self, str name) -> Potential`

Computes and returns the current posterior of a node.

#### Parameters

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the current posterior probability of the node

**Return type** `pyAgrum.Potential` (page 151)

**Raises** `UndefinedElement` (page 237) – If an element of nodes is not in targets

#### **currentTime** (*LoopyGibbsSampling self*)

**Returns** get the current running time in second (double)

**Return type** double

#### **epsilon** (*LoopyGibbsSampling self*)

**Returns** the value of epsilon

**Return type** double

#### **eraseAllEvidence** (*LoopyGibbsSampling self*)

Removes all the evidence entered into the network.

#### **eraseAllTargets** (*LoopyGibbsSampling self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

#### **eraseEvidence** (*LoopyGibbsSampling self, int id*)

`eraseEvidence(LoopyGibbsSampling self, str nodeName)`

Remove the evidence, if any, corresponding to the node Id or name.

#### Parameters

- **id** (*int*) – a node Id

- **nodeName** (*int*) – a node name

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**eraseTarget** (*LoopyGibbsSampling self, int target*)  
`eraseTarget(LoopyGibbsSampling self, str nodeName)`

Remove, if existing, the marginal target.

#### Parameters

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

#### Raises

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**evidenceImpact** (*LoopyGibbsSampling self, int target, PyObject \* evs*)  
`evidenceImpact(LoopyGibbsSampling self, str target, Vector_string evs) -> Potential`  
Create a pyAgrum.Potential for P(targetlevs) (for all instantiation of target and evs)

#### Parameters

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for P(targetslevs)

**Return type** `pyAgrum.Potential` (page 151)

**hardEvidenceNodes** (*LoopyGibbsSampling self*)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*LoopyGibbsSampling self, int id*)

`hasEvidence(LoopyGibbsSampling self, str nodeName) -> bool`

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasHardEvidence** (*LoopyGibbsSampling self, str nodeName*)

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*LoopyGibbsSampling self, int id*)

hasSoftEvidence(*LoopyGibbsSampling self*, str *nodeName*) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**history** (*LoopyGibbsSampling self*)

**Returns** the scheme history

**Return type** tuple

**Raises** gum.OperationNotAllowed – If the scheme did not performed or if verbosity is set to false

**isDrawnAtRandom** (*LoopyGibbsSampling self*)

**Returns** True if variables are drawn at random

**Return type** bool

**isTarget** (*LoopyGibbsSampling self, int variable*)

isTarget(*LoopyGibbsSampling self*, str *nodeName*) -> bool

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**makeInference** (*LoopyGibbsSampling self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what makeInference should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**maxIter** (*LoopyGibbsSampling self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*LoopyGibbsSampling self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*LoopyGibbsSampling self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*LoopyGibbsSampling self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrDrawnVar** (*LoopyGibbsSampling self*)

**Returns** the number of variable drawn at each iteration

**Return type** int

**nbrEvidence** (*LoopyGibbsSampling self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*LoopyGibbsSampling self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrIterations** (*LoopyGibbsSampling self*)

**Returns** the number of iterations

**Return type** int

**nbrSoftEvidence** (*LoopyGibbsSampling self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*LoopyGibbsSampling self*)

**Returns** the number of marginal targets

**Return type** int

**periodSize** (*LoopyGibbsSampling self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**posterior** (*LoopyGibbsSampling self, int var*)

posterior(*LoopyGibbsSampling self, str nodeName*) -> Potential

Computes and returns the posterior of a node.

#### Parameters

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** gum.UndefinedElement – If an element of nodes is not in targets

**setBurnIn** (*LoopyGibbsSampling self, int b*)

**Parameters** **b** (*int*) – size of burn in on number of iteration

**setDrawnAtRandom** (*LoopyGibbsSampling self, bool \_atRandom*)

**Parameters** **\_atRandom** (*bool*) – indicates if variables should be drawn at random

**setEpsilon** (*LoopyGibbsSampling self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If  $\text{eps} < 0$

**setEvidence** (*evidces*)  
 Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

**setMaxIter** (*LoopyGibbsSampling self, int max*)  
**Parameters** **max** (*int*) – the maximum number of iteration  
**Raises** gum.OutOfLowerBound – If  $\text{max} \leq 1$

**setMaxTime** (*LoopyGibbsSampling self, double timeout*)  
**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)  
**Raises** gum.OutOfLowerBound – If  $\text{timeout} \leq 0.0$

**setMinEpsilonRate** (*LoopyGibbsSampling self, double rate*)  
**Parameters** **rate** (*double*) – the minimal epsilon rate

**setNbrDrawnVar** (*LoopyGibbsSampling self, int \_nbr*)  
**Parameters** **\_nbr** (*int*) – the number of variables to be drawn at each iteration

**setPeriodSize** (*LoopyGibbsSampling self, int p*)  
**Parameters** **p** (*int*) – number of samples between 2 stopping  
**Raises** gum.OutOfLowerBound – If  $\text{p} < 1$

**setTargets** (*targets*)  
 Remove all the targets and add the ones in parameter.  
**Parameters** **targets** (*set*) – a set of targets  
**Raises** gum.UndefinedElement – If one target is not in the Bayes net

**setVerbosity** (*LoopyGibbsSampling self, bool v*)  
**Parameters** **v** (*bool*) – verbosity

**setVirtualLBPSize** (*LoopyGibbsSampling self, double vlbpsize*)  
**Parameters** **vlbpsize** (*double*) – the size of the virtual LBP

**softEvidenceNodes** (*LoopyGibbsSampling self*)  
**Returns** the set of nodes with soft evidence  
**Return type** set

**targets** (*LoopyGibbsSampling self*)  
**Returns** the list of marginal targets  
**Return type** list

**updateEvidence** (*evidces*)  
 Apply chgEvidence(key,value) for every pairs in evidces (or addEvidence).  
**Parameters** **evidces** (*dict*) – a dict of evidences

### Raises

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**verbosity** (*LoopyGibbsSampling self*)

**Returns** True if the verbosity is enabled

**Return type** bool

## Loopy Monte Carlo Sampling

**class** `pyAgrum.LoopyMonteCarloSampling` (*bn: pyAgrum.IBayesNet*)

Class used for inferences using a loopy version of Monte Carlo sampling.

**LoopyMonteCarloSampling(bn) -> LoopyMonteCarloSampling**

**Parameters:**

- **bn** (`pyAgrum.BayesNet`) – a Bayesian network

**BN** (*LoopyMonteCarloSampling self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** `pyAgrum.IBayesNet`

**Raises** `gum.UndefinedElement` – If no Bayes net has been assigned to the inference.

**H** (*LoopyMonteCarloSampling self, int X*)

`H(LoopyMonteCarloSampling self, str nodeName) -> double`

**Parameters**

- **X** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**addAllTargets** (*LoopyMonteCarloSampling self*)

Add all the nodes as targets.

**addEvidence** (*LoopyMonteCarloSampling self, int id, int val*)

`addEvidence(LoopyMonteCarloSampling self, str nodeName, int val)` `addEvidence(LoopyMonteCarloSampling self, int id, str val)` `addEvidence(LoopyMonteCarloSampling self, str nodeName, str val)` `addEvidence(LoopyMonteCarloSampling self, int id, Vector vals)` `addEvidence(LoopyMonteCarloSampling self, str nodeName, Vector vals)`

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (int) a node value
- **val** – (str) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node already has an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**addTarget** (*LoopyMonteCarloSampling self, int target*)addTarget(*LoopyMonteCarloSampling self, str nodeName*)

Add a marginal target to the list of targets.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** gum.UndefinedElement – If target is not a NodeId in the Bayes net**chgEvidence** (*LoopyMonteCarloSampling self, int id, int val*)chgEvidence(*LoopyMonteCarloSampling self, str nodeName, int val*) chgEvidence(*LoopyMonteCarloSampling self, int id, str val*) chgEvidence(*LoopyMonteCarloSampling self, str nodeName, str val*) chgEvidence(*LoopyMonteCarloSampling self, int id, Vector vals*) chgEvidence(*LoopyMonteCarloSampling self, str nodeName, Vector vals*)

Change the value of an already existing evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node does not already have an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**currentPosterior** (*LoopyMonteCarloSampling self, int id*)currentPosterior(*LoopyMonteCarloSampling self, str name*) -> Potential

Computes and returns the current posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the current posterior probability of the node**Return type** *pyAgrum.Potential* (page 151)

**Raises** `UndefinedElement` (page 237) – If an element of nodes is not in targets

**currentTime** (`LoopyMonteCarloSampling self`)

**Returns** get the current running time in second (double)

**Return type** double

**epsilon** (`LoopyMonteCarloSampling self`)

**Returns** the value of epsilon

**Return type** double

**eraseAllEvidence** (`LoopyMonteCarloSampling self`)

Removes all the evidence entered into the network.

**eraseAllTargets** (`LoopyMonteCarloSampling self`)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**eraseEvidence** (`LoopyMonteCarloSampling self, int id`)

`eraseEvidence(LoopyMonteCarloSampling self, str nodeName)`

Remove the evidence, if any, corresponding to the node Id or name.

**Parameters**

- **id** (`int`) – a node Id
- **nodeName** (`int`) – a node name

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**eraseTarget** (`LoopyMonteCarloSampling self, int target`)

`eraseTarget(LoopyMonteCarloSampling self, str nodeName)`

Remove, if existing, the marginal target.

**Parameters**

- **target** (`int`) – a node Id
- **nodeName** (`int`) – a node name

**Raises**

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**evidenceImpact** (`LoopyMonteCarloSampling self, int target, PyObject * evs`)

`evidenceImpact(LoopyMonteCarloSampling self, str target, Vector_string evs) -> Potential`

Create a `pyAgrum.Potential` for  $P(\text{target}|\text{levs})$  (for all instantiation of target and evs)

**Parameters**

- **target** (`set`) – a set of targets ids or names.
- **evs** (`set`) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for  $P(\text{targets}|\text{levs})$

**Return type** `pyAgrum.Potential` (page 151)

**hardEvidenceNodes** (`LoopyMonteCarloSampling self`)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*LoopyMonteCarloSampling self, int id*)

hasEvidence(LoopyMonteCarloSampling self, str nodeName) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**hasHardEvidence** (*LoopyMonteCarloSampling self, str nodeName*)

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*LoopyMonteCarloSampling self, int id*)

hasSoftEvidence(LoopyMonteCarloSampling self, str nodeName) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**history** (*LoopyMonteCarloSampling self*)

**Returns** the scheme history

**Return type** tuple

**Raises** gum.OperationNotAllowed – If the scheme did not performed or if verbosity is set to false

**isTarget** (*LoopyMonteCarloSampling self, int variable*)

isTarget(LoopyMonteCarloSampling self, str nodeName) -> bool

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- gum.IndexError – If the node does not belong to the Bayesian network
- gum.UndefinedElement – If node Id is not in the Bayesian network

**makeInference** (*LoopyMonteCarloSampling self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what makeInference should compute. Later, the computations of the posteriors can be done 'lightly' by multiplying and projecting those messages.

**maxIter** (*LoopyMonteCarloSampling self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*LoopyMonteCarloSampling self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*LoopyMonteCarloSampling self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*LoopyMonteCarloSampling self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrEvidence** (*LoopyMonteCarloSampling self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*LoopyMonteCarloSampling self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrIterations** (*LoopyMonteCarloSampling self*)

**Returns** the number of iterations

**Return type** int

**nbrSoftEvidence** (*LoopyMonteCarloSampling self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*LoopyMonteCarloSampling self*)

**Returns** the number of marginal targets

**Return type** int

**periodSize** (*LoopyMonteCarloSampling self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**posterior** (*LoopyMonteCarloSampling self, int var*)

posterior(LoopyMonteCarloSampling self, str nodeName) -> Potential

Computes and returns the posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** *pyAgrum.Potential* (page 151)

**Raises** *gum.UndefinedElement* – If an element of nodes is not in targets

**setEpsilon** (*LoopyMonteCarloSampling self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** *gum.OutOfLowerBound* – If *eps*<0

**setEvidence** (*evidces*)

Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- *gum.InvalidArgument* – If one value is not a value for the node
- *gum.InvalidArgument* – If the size of a value is different from the domain side of the node
- *gum.FatalError* – If one value is a vector of 0s
- *gum.UndefinedElement* – If one node does not belong to the Bayesian network

**setMaxIter** (*LoopyMonteCarloSampling self, int max*)

**Parameters** **max** (*int*) – the maximum number of iteration

**Raises** *gum.OutOfLowerBound* – If *max* <= 1

**setMaxTime** (*LoopyMonteCarloSampling self, double timeout*)

**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)

**Raises** *gum.OutOfLowerBound* – If *timeout*<=0.0

**setMinEpsilonRate** (*LoopyMonteCarloSampling self, double rate*)

**Parameters** **rate** (*double*) – the minimal epsilon rate

**setPeriodSize** (*LoopyMonteCarloSampling self, int p*)

**Parameters** **p** (*int*) – number of samples between 2 stopping

**Raises** *gum.OutOfLowerBound* – If *p*<1

**setTargets** (*targets*)

Remove all the targets and add the ones in parameter.

**Parameters** **targets** (*set*) – a set of targets

**Raises** *gum.UndefinedElement* – If one target is not in the Bayes net

**setVerbosity** (*LoopyMonteCarloSampling self, bool v*)

**Parameters** **v** (*bool*) – verbosity

**setVirtualLBPSize** (*LoopyMonteCarloSampling self, double vlpysize*)

**Parameters** **vlpysize** (*double*) – the size of the virtual LBP

**softEvidenceNodes** (*LoopyMonteCarloSampling self*)

**Returns** the set of nodes with soft evidence

**Return type** set

**targets** (*LoopyMonteCarloSampling self*)

**Returns** the list of marginal targets

**Return type** list

**updateEvidence** (*evidces*)

Apply chgEvidence(key,value) for every pairs in evidces (or addEvidence).

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

**verbosity** (*LoopyMonteCarloSampling self*)

**Returns** True if the verbosity is enabled

**Return type** bool

## Loopy Weighted Sampling

**class** pyAgrum.**LoopyWeightedSampling** (*bn: pyAgrum.IBayesNet*)

Class used for inferences using a loopy version of weighted sampling.

**LoopyWeightedSampling(bn) -> LoopyWeightedSampling**

**Parameters:**

- **bn** (*pyAgrum.BayesNet*) – a Bayesian network

**BN** (*LoopyWeightedSampling self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** pyAgrum.IBayesNet

**Raises** gum.UndefinedElement – If no Bayes net has been assigned to the inference.

**H** (*LoopyWeightedSampling self, int X*)

H(*LoopyWeightedSampling self, str nodeName*) -> double

**Parameters**

- **x** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**addAllTargets** (*LoopyWeightedSampling self*)

Add all the nodes as targets.

**addEvidence** (*LoopyWeightedSampling self, int id, int val*)

```
addEvidence(LoopyWeightedSampling self, str nodeName, int val) addEvidence(LoopyWeightedSampling self, int id, str val) addEvidence(LoopyWeightedSampling self, str nodeName, str val) addEvidence(LoopyWeightedSampling self, int id, Vector vals) addEvidence(LoopyWeightedSampling self, str nodeName, Vector vals)
```

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node already has an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**addTarget** (*LoopyWeightedSampling self, int target*)addTarget(*LoopyWeightedSampling self, str nodeName*)

Add a marginal target to the list of targets.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** gum.UndefinedElement – If target is not a NodeId in the Bayes net**chgEvidence** (*LoopyWeightedSampling self, int id, int val*)chgEvidence(*LoopyWeightedSampling self, str nodeName, int val*) chgEvidence(*LoopyWeightedSampling self, int id, str val*) chgEvidence(*LoopyWeightedSampling self, str nodeName, str val*) chgEvidence(*LoopyWeightedSampling self, int id, Vector vals*) chgEvidence(*LoopyWeightedSampling self, str nodeName, Vector vals*)

Change the value of an already existing evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node does not already have an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**currentPosterior** (*LoopyWeightedSampling self, int id*)currentPosterior(*LoopyWeightedSampling self, str name*) -> Potential

Computes and returns the current posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the current posterior probability of the node

**Return type** *pyAgrum.Potential* (page 151)

**Raises** *UndefinedElement* (page 237) – If an element of nodes is not in targets

**currentTime** (*LoopyWeightedSampling self*)

**Returns** get the current running time in second (double)

**Return type** double

**epsilon** (*LoopyWeightedSampling self*)

**Returns** the value of epsilon

**Return type** double

**eraseAllEvidence** (*LoopyWeightedSampling self*)

Removes all the evidence entered into the network.

**eraseAllTargets** (*LoopyWeightedSampling self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**eraseEvidence** (*LoopyWeightedSampling self, int id*)

eraseEvidence(*LoopyWeightedSampling self, str nodeName*)

Remove the evidence, if any, corresponding to the node Id or name.

#### Parameters

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** *gum.IndexError* – If the node does not belong to the Bayesian network

**eraseTarget** (*LoopyWeightedSampling self, int target*)

eraseTarget(*LoopyWeightedSampling self, str nodeName*)

Remove, if existing, the marginal target.

#### Parameters

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

#### Raises

- *gum.IndexError* – If one of the node does not belong to the Bayesian network
- *gum.UndefinedElement* – If node Id is not in the Bayesian network

**evidenceImpact** (*LoopyWeightedSampling self, int target, PyObject \* evs*)

evidenceImpact(*LoopyWeightedSampling self, str target, Vector\_string evs*) -> Potential

Create a *pyAgrum.Potential* for P(target|evs) (for all instantiation of target and evs)

#### Parameters

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for  $P(\text{targetslevs})$

**Return type** `pyAgrum.Potential` (page 151)

**hardEvidenceNodes** (*LoopyWeightedSampling self*)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*LoopyWeightedSampling self, int id*)

`hasEvidence(LoopyWeightedSampling self, str nodeName) -> bool`

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasHardEvidence** (*LoopyWeightedSampling self, str nodeName*)

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*LoopyWeightedSampling self, int id*)

`hasSoftEvidence(LoopyWeightedSampling self, str nodeName) -> bool`

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**history** (*LoopyWeightedSampling self*)

**Returns** the scheme history

**Return type** tuple

**Raises** `gum.OperationNotAllowed` – If the scheme did not performed or if verbosity is set to false

**isTarget** (*LoopyWeightedSampling self, int variable*)

`isTarget(LoopyWeightedSampling self, str nodeName) -> bool`

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- `gum.IndexError` – If the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**makeInference** (*LoopyWeightedSampling self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what `makeInference` should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**maxIter** (*LoopyWeightedSampling self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*LoopyWeightedSampling self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*LoopyWeightedSampling self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*LoopyWeightedSampling self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrEvidence** (*LoopyWeightedSampling self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*LoopyWeightedSampling self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrIterations** (*LoopyWeightedSampling self*)

**Returns** the number of iterations

**Return type** int

**nbrSoftEvidence** (*LoopyWeightedSampling self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*LoopyWeightedSampling self*)

**Returns** the number of marginal targets

**Return type** int

**periodSize** (*LoopyWeightedSampling self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**posterior** (*LoopyWeightedSampling self, int var*)  
**posterior**(*LoopyWeightedSampling self, str nodeName*) -> Potential  
Computes and returns the posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** *pyAgrum.Potential* (page 151)

**Raises** gum.UndefinedElement – If an element of nodes is not in targets

**setEpsilon** (*LoopyWeightedSampling self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If eps<0

**setEvidence** (*evidces*)  
Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

**setMaxIter** (*LoopyWeightedSampling self, int max*)

**Parameters** **max** (*int*) – the maximum number of iteration

**Raises** gum.OutOfLowerBound – If max <= 1

**setMaxTime** (*LoopyWeightedSampling self, double timeout*)

**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)

**Raises** gum.OutOfLowerBound – If timeout<=0.0

**setMinEpsilonRate** (*LoopyWeightedSampling self, double rate*)

**Parameters** **rate** (*double*) – the minimal epsilon rate

**setPeriodSize** (*LoopyWeightedSampling self, int p*)

**Parameters** **p** (*int*) – number of samples between 2 stopping

**Raises** gum.OutOfLowerBound – If p<1

**setTargets** (*targets*)  
Remove all the targets and add the ones in parameter.

**Parameters** **targets** (*set*) – a set of targets

**Raises** gum.UndefinedElement – If one target is not in the Bayes net

**setVerbosity** (*LoopyWeightedSampling self, bool v*)

**Parameters** **v** (*bool*) – verbosity

**setVirtualLBPSize** (*LoopyWeightedSampling self, double vlbpsize*)

**Parameters** `vLbpsize` (*double*) – the size of the virtual LBP  
**softEvidenceNodes** (*LoopyWeightedSampling self*)  
    **Returns** the set of nodes with soft evidence  
    **Return type** set  
**targets** (*LoopyWeightedSampling self*)  
    **Returns** the list of marginal targets  
    **Return type** list  
**updateEvidence** (*evidces*)  
    Apply chgEvidence(key,value) for every pairs in evidces (or addEvidence).  
        **Parameters** `evidces` (*dict*) – a dict of evidences  
        **Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**verbosity** (*LoopyWeightedSampling self*)  
    **Returns** True if the verbosity is enabled  
    **Return type** bool

## Loopy Importance Sampling

**class** `pyAgrum.LoopyImportanceSampling` (*bn: pyAgrum.IBayesNet*)  
    Class used for inferences using a loopy version of importance sampling.

**LoopyImportanceSampling(bn) -> LoopyImportanceSampling**

**Parameters:**

- **bn** (*pyAgrum.BayesNet*) – a Bayesian network

**BN** (*LoopyImportanceSampling self*)

**Returns** A constant reference over the IBayesNet referenced by this class.

**Return type** *pyAgrum.IBayesNet*

**Raises** `gum.UndefinedElement` – If no Bayes net has been assigned to the inference.

**H** (*LoopyImportanceSampling self, int X*)

`H(LoopyImportanceSampling self, str nodeName) -> double`

**Parameters**

- **x** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** the computed Shanon's entropy of a node given the observation

**Return type** double

**addAllTargets** (*LoopyImportanceSampling self*)

Add all the nodes as targets.

**addEvidence** (*LoopyImportanceSampling self, int id, int val*)

```
addEvidence(LoopyImportanceSampling self, str nodeName, int val) addEvidence(LoopyImportanceSampling self, int id, str val) addEvidence(LoopyImportanceSampling self, str nodeName, str val) addEvidence(LoopyImportanceSampling self, int id, Vector vals) addEvidence(LoopyImportanceSampling self, str nodeName, Vector vals)
```

Adds a new evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node already has an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node
- gum.FatalError – If vals is a vector of 0s
- gum.UndefinedElement – If the node does not belong to the Bayesian network

**addTarget** (*LoopyImportanceSampling self, int target*)

```
addTarget(LoopyImportanceSampling self, str nodeName)
```

Add a marginal target to the list of targets.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Raises** gum.UndefinedElement – If target is not a NodeId in the Bayes net

**chgEvidence** (*LoopyImportanceSampling self, int id, int val*)

```
chgEvidence(LoopyImportanceSampling self, str nodeName, int val) chgEvidence(LoopyImportanceSampling self, int id, str val) chgEvidence(LoopyImportanceSampling self, str nodeName, str val) chgEvidence(LoopyImportanceSampling self, int id, Vector vals) chgEvidence(LoopyImportanceSampling self, str nodeName, Vector vals)
```

Change the value of an already existing evidence on a node (might be soft or hard).

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name
- **val** – (*int*) a node value
- **val** – (*str*) the label of the node value
- **vals** (*list*) – a list of values

**Raises**

- gum.InvalidArgument – If the node does not already have an evidence
- gum.InvalidArgument – If val is not a value for the node
- gum.InvalidArgument – If the size of vals is different from the domain side of the node

- `gum.FatalError` – If vals is a vector of 0s
- `gum.UndefinedElement` – If the node does not belong to the Bayesian network

**currentPosterior** (*LoopyImportanceSampling self, int id*)

`currentPosterior(LoopyImportanceSampling self, str name) -> Potential`

Computes and returns the current posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the current posterior probability of the node

**Return type** `pyAgrum.Potential` (page 151)

**Raises** `UndefinedElement` (page 237) – If an element of nodes is not in targets

**currentTime** (*LoopyImportanceSampling self*)

**Returns** get the current running time in second (double)

**Return type** double

**epsilon** (*LoopyImportanceSampling self*)

**Returns** the value of epsilon

**Return type** double

**eraseAllEvidence** (*LoopyImportanceSampling self*)

Removes all the evidence entered into the network.

**eraseAllTargets** (*LoopyImportanceSampling self*)

Clear all previously defined targets (marginal and joint targets).

As a result, no posterior can be computed (since we can only compute the posteriors of the marginal or joint targets that have been added by the user).

**eraseEvidence** (*LoopyImportanceSampling self, int id*)

`eraseEvidence(LoopyImportanceSampling self, str nodeName)`

Remove the evidence, if any, corresponding to the node Id or name.

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises** `gum.IndexError` – If the node does not belong to the Bayesian network

**eraseTarget** (*LoopyImportanceSampling self, int target*)

`eraseTarget(LoopyImportanceSampling self, str nodeName)`

Remove, if existing, the marginal target.

**Parameters**

- **target** (*int*) – a node Id
- **nodeName** (*int*) – a node name

**Raises**

- `gum.IndexError` – If one of the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**evidenceImpact** (*LoopyImportanceSampling self, int target, PyObject \* evs*)  
evidenceImpact(LoopyImportanceSampling self, str target, Vector\_string evs) -> Potential  
Create a pyAgrum.Potential for P(targetlevs) (for all instantiation of target and evs)

**Parameters**

- **target** (*set*) – a set of targets ids or names.
- **evs** (*set*) – a set of nodes ids or names.

**Warning:** if some evs are d-separated, they are not included in the Potential.

**Returns** a Potential for P(targetslevs)

**Return type** *pyAgrum.Potential* (page 151)

**hardEvidenceNodes** (*LoopyImportanceSampling self*)

**Returns** the set of nodes with hard evidence

**Return type** set

**hasEvidence** (*LoopyImportanceSampling self, int id*)

hasEvidence(LoopyImportanceSampling self, str nodeName) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if some node(s) (or the one in parameters) have received evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**hasHardEvidence** (*LoopyImportanceSampling self, str nodeName*)

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a hard evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**hasSoftEvidence** (*LoopyImportanceSampling self, int id*)

hasSoftEvidence(LoopyImportanceSampling self, str nodeName) -> bool

**Parameters**

- **id** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if node has received a soft evidence

**Return type** bool

**Raises** gum.IndexError – If the node does not belong to the Bayesian network

**history** (*LoopyImportanceSampling self*)

**Returns** the scheme history

**Return type** tuple

**Raises** `gum.OperationNotAllowed` – If the scheme did not performed or if verbosity is set to false

**isTarget** (*LoopyImportanceSampling self, int variable*)  
`isTarget(LoopyImportanceSampling self, str nodeName) -> bool`

**Parameters**

- **variable** (*int*) – a node Id
- **nodeName** (*str*) – a node name

**Returns** True if variable is a (marginal) target

**Return type** bool

**Raises**

- `gum.IndexError` – If the node does not belong to the Bayesian network
- `gum.UndefinedElement` – If node Id is not in the Bayesian network

**makeInference** (*LoopyImportanceSampling self*)

Perform the heavy computations needed to compute the targets' posteriors

In a Junction tree propagation scheme, for instance, the heavy computations are those of the messages sent in the JT. This is precisely what `makeInference` should compute. Later, the computations of the posteriors can be done ‘lightly’ by multiplying and projecting those messages.

**maxIter** (*LoopyImportanceSampling self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*LoopyImportanceSampling self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*LoopyImportanceSampling self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*LoopyImportanceSampling self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrEvidence** (*LoopyImportanceSampling self*)

**Returns** the number of evidence entered into the Bayesian network

**Return type** int

**nbrHardEvidence** (*LoopyImportanceSampling self*)

**Returns** the number of hard evidence entered into the Bayesian network

**Return type** int

**nbrIterations** (*LoopyImportanceSampling self*)

**Returns** the number of iterations

**Return type** int

**nbrSoftEvidence** (*LoopyImportanceSampling self*)

**Returns** the number of soft evidence entered into the Bayesian network

**Return type** int

**nbrTargets** (*LoopyImportanceSampling self*)

**Returns** the number of marginal targets

**Return type** int

**periodSize** (*LoopyImportanceSampling self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**posterior** (*LoopyImportanceSampling self, int var*)

posterior(*LoopyImportanceSampling self, str nodeName*) -> Potential

Computes and returns the posterior of a node.

**Parameters**

- **var** (*int*) – the node Id of the node for which we need a posterior probability
- **nodeName** (*str*) – the node name of the node for which we need a posterior probability

**Returns** a ref to the posterior probability of the node

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** gum.UndefinedElement – If an element of nodes is not in targets

**setEpsilon** (*LoopyImportanceSampling self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If eps<0

**setEvidence** (*evidces*)

Erase all the evidences and apply addEvidence(key,value) for every pairs in evidces.

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- gum.InvalidArgument – If one value is not a value for the node
- gum.InvalidArgument – If the size of a value is different from the domain side of the node
- gum.FatalError – If one value is a vector of 0s
- gum.UndefinedElement – If one node does not belong to the Bayesian network

**setMaxIter** (*LoopyImportanceSampling self, int max*)

**Parameters** **max** (*int*) – the maximum number of iteration

**Raises** gum.OutOfLowerBound – If max <= 1

**setMaxTime** (*LoopyImportanceSampling self, double timeout*)

**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)

**Raises** gum.OutOfLowerBound – If timeout<=0.0

**setMinEpsilonRate** (*LoopyImportanceSampling self, double rate*)

**Parameters** **rate** (*double*) – the minimal epsilon rate

**setPeriodSize** (*LoopyImportanceSampling self, int p*)

**Parameters** **p** (*int*) – number of samples between 2 stopping

**Raises** gum.OutOfLowerBound – If p<1

**setTargets** (*targets*)

Remove all the targets and add the ones in parameter.

**Parameters** **targets** (*set*) – a set of targets

**Raises** `gum.UndefinedElement` – If one target is not in the Bayes net

**setVerbosity** (*LoopyImportanceSampling self, bool v*)

**Parameters** **v** (*bool*) – verbosity

**setVirtualLBPSize** (*LoopyImportanceSampling self, double vlpbsize*)

**Parameters** **vlpbsize** (*double*) – the size of the virtual LBP

**softEvidenceNodes** (*LoopyImportanceSampling self*)

**Returns** the set of nodes with soft evidence

**Return type** set

**targets** (*LoopyImportanceSampling self*)

**Returns** the list of marginal targets

**Return type** list

**updateEvidence** (*evidces*)

Apply `chgEvidence(key,value)` for every pairs in evidces (or `addEvidence`).

**Parameters** **evidces** (*dict*) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

**verbosity** (*LoopyImportanceSampling self*)

**Returns** True if the verbosity is enabled

**Return type** bool

## 1.6 Learning

pyAgrum encloses all the learning processes for Bayesian network in a simple class BNLearner. This class gives access directly to the complete learning algorithm and theirs parameters (such as prior, scores, constraints, etc.) but also proposes low-level functions that eases the work on developing new learning algorithms (for instance, compute chi2 or conditioanl likelihood on the database, etc.).

**class** `pyAgrum.BNLearner` (*filename*)

**Parameters:**

- **filename** (*str*) – the file to learn from

`BNLearner(filename,src,parse_database=False) -> BNLearner`

**Parameters:**

- **filename** (*str*) – the file to learn from
- **src** (*pyAgrum.BayesNet*) – the Bayesian network used to find those modalities

- **parse\_database** (*bool*) – if True, the modalities specified by the user will be considered as a superset of the modalities of the variables.

**BNLearner(learner) -> BNLearner****Parameters:**

- **learner** (*pyAgrum.BNLearner*) – the BNLearner to copy

**G2 (BNLearner self, str var1, str var2, Vector\_string knw={})**

G2 computes the G2 statistic and pvalue for two columns, given a list of other columns.

**Parameters**

- **name1** (*str*) – the name of the first column
- **name2** (*str*) – the name of the second column
- **knowing** (*[str]*) – the list of names of conditioning columns

**Returns** the G2 statistic and the associated p-value as a Tuple

**Return type** statistic,pvalue

**addForbiddenArc (BNLearner self, Arc arc)**

addForbiddenArc(BNLearner self, int tail, int head) addForbiddenArc(BNLearner self, str tail, str head)

The arc in parameters won't be added.

**Parameters**

- **arc** (*pyAgrum.Arc* (page 115)) – an arc
- **head** – a variable's id (int)
- **tail** – a variable's id (int)
- **head** – a variable's name (str)
- **tail** – a variable's name (str)

**addMandatoryArc (BNLearner self, Arc arc)**

addMandatoryArc(BNLearner self, int tail, int head) addMandatoryArc(BNLearner self, str tail, str head)

Allow to add prior structural knowledge.

**Parameters**

- **arc** (*pyAgrum.Arc* (page 115)) – an arc
- **head** – a variable's id (int)
- **tail** – a variable's id (int)
- **head** – a variable's name (str)
- **tail** – a variable's name (str)

**Raises** `gum.InvalidDirectedCycle` – If the added arc creates a directed cycle in the DAG

**addPossibleEdge (BNLearner self, Edge edge)**

addPossibleEdge(BNLearner self, int tail, int head) addPossibleEdge(BNLearner self, str tail, str head)

**chi2 (BNLearner self, str var1, str var2, Vector\_string knw={})**

chi2 computes the chi2 statistic and pvalue for two columns, given a list of other columns.

**Parameters**

- **name1** (*str*) – the name of the first column
- **name2** (*str*) – the name of the second column

- **knowing** (*[str]*) – the list of names of conditioning columns

**Returns** the chi2 statistic and the associated p-value as a Tuple

**Return type** statistic,pvalue

**currentTime** (*BNLearner self*)

**Returns** get the current running time in second (double)

**Return type** double

**databaseWeight** (*BNLearner self*)

**epsilon** (*BNLearner self*)

**Returns** the value of epsilon

**Return type** double

**eraseForbiddenArc** (*BNLearner self, Arc arc*)

eraseForbiddenArc(*BNLearner self*, int tail, int head) eraseForbiddenArc(*BNLearner self*, str tail, str head)

Allow the arc to be added if necessary.

#### Parameters

- **arc** (*pyAgrum*) – an arc
- **head** – a variable's id (int)
- **tail** – a variable's id (int)
- **head** – a variable's name (str)
- **tail** – a variable's name (str)

**eraseMandatoryArc** (*BNLearner self, Arc arc*)

eraseMandatoryArc(*BNLearner self*, int tail, int head) eraseMandatoryArc(*BNLearner self*, str tail, str head)

#### Parameters

- **arc** (*pyAgrum*) – an arc
- **head** – a variable's id (int)
- **tail** – a variable's id (int)
- **head** – a variable's name (str)
- **tail** – a variable's name (str)

**erasePossibleEdge** (*BNLearner self, Edge edge*)

erasePossibleEdge(*BNLearner self*, int tail, int head) erasePossibleEdge(*BNLearner self*, str tail, str head)

Allow the 2 arcs to be added if necessary.

#### Parameters

- **arc** (*pyAgrum*) – an arc
- **head** – a variable's id (int)
- **tail** – a variable's id (int)
- **head** – a variable's name (str)
- **tail** – a variable's name (str)

**hasMissingValues** (*BNLearner self*)

Indicates whether there are missing values in the database.

**Returns** True if there are some missing values in the database.

**Return type** bool

**history** (*BNLearner self*)

**Returns** the scheme history

**Return type** tuple

**Raises** `gum.OperationNotAllowed` – If the scheme did not performed or if verbosity is set to false

**idFromName** (*BNLearner self, str var\_name*)

**Parameters** `var_names` (*str*) – a variable's name

**Returns** the column id corresponding to a variable name

**Return type** int

**Raises** `gum.MissingVariableInDatabase` – If a variable of the BN is not found in the database.

**latentVariables** (*BNLearner self*)  
`latentVariables(BNLearner self) -> vector< pyAgrum.Arc,allocator< pyAgrum.Arc > > const`

**Warning:** learner must be using Zoff2 or MIIC algorithm

**Returns** the list of latent variables

**Return type** list

**learnBN** (*BNLearner self*)  
`learn a BayesNet from a file (must have read the db before)`

**Returns** the learned BayesNet

**Return type** `pyAgrum.BayesNet` (page 3)

**learnDAG** (*BNLearner self*)  
`learn a structure from a file`

**Returns** the learned DAG

**Return type** `pyAgrum.DAG` (page 119)

**learnMixedStructure** (*BNLearner self*)

**Warning:** learner must be using Zoff2 or MIIC algorithm

**Returns** the learned structure as an EssentialGraph

**Return type** `pyAgrum.EssentialGraph` (page 22)

**learnParameters** (*BNLearner self, DAG dag, bool take\_into\_account\_score=True*)  
`learnParameters(BNLearner self, bool take_into_account_score=True) -> BayesNet`

learns a BN (its parameters) when its structure is known.

**Parameters**

- `dag` (`pyAgrum.DAG` (page 119)) –
- `bn` (`pyAgrum.BayesNet` (page 3)) –

- **take\_into\_account\_score** (*bool*) – The dag passed in argument may have been learnt from a structure learning. In this case, if the score used to learn the structure has an implicit apriori (like K2 which has a 1-smoothing apriori), it is important to also take into account this implicit apriori for parameter learning. By default, if a score exists, we will learn parameters by taking into account the apriori specified by methods useAprioriXXX () + the implicit apriori of the score, else we just take into account the apriori specified by useAprioriXXX ()

**Returns** the learned BayesNet

**Return type** *pyAgrum.BayesNet* (page 3)

**Raises**

- *gum.MissingVariableInDatabase* – If a variable of the BN is not found in the database
- *gum.UnknownLabelInDatabase* – If a label is found in the database that do not correspond to the variable

**logLikelihood** (*BNLearner self*, *vector< int, allocator< int > > vars*, *vector< int, allocator< int > > knowing={}*)  
logLikelihood(BNLearner self, vector< int, allocator< int > > vars) -> double logLikelihood(BNLearner self, Vector\_string vars, Vector\_string knowing={{}}) -> double logLikelihood(BNLearner self, Vector\_string vars) -> double  
logLikelihood computes the log-likelihood for the columns in vars, given the columns in the list knowing (optional)

**Parameters**

- **vars** (*List [str]*) – the name of the columns of interest
- **knowing** (*List [str]*) – the (optional) list of names of conditioning columns

**Returns** the log-likelihood (base 2)

**Return type** double

**maxIter** (*BNLearner self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*BNLearner self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*BNLearner self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*BNLearner self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nameFromId** (*BNLearner self, int id*)

**Parameters** **id** – a node id

**Returns** the variable's name

**Return type** str

**names** (*BNLearner self*)

---

**Returns** the names of the variables in the database

**Return type** List[str]

**nbCols** (*BNLearner self*)  
Return the nimir of columns in the database

**Returns** the number of columns in the database

**Return type** int

**nbRows** (*BNLearner self*)  
Return the number of row in the database

**Returns** the number of rows in the database

**Return type** int

**nbrIterations** (*BNLearner self*)  
Returns the number of iterations

**Return type** int

**periodSize** (*BNLearner self*)  
Returns the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**recordWeight** (*BNLearner self, size\_t i*)

**setPrioriWeight** (*weight*)  
Deprecated methods in BNLearner for pyAgrum>0.14.0

**setDatabaseWeight** (*BNLearner self, double new\_weight*)  
Set the database weight.

**Parameters** **weight** (*double*) – the database weight

**setEpsilon** (*BNLearner self, double eps*)  
  
**Parameters** **eps** (*double*) – the epsilon we want to use  
  
**Raises** gum.OutOfLowerBound – If eps<0

**setInitialDAG** (*BNLearner self, DAG g*)  
  
**Parameters** **dag** ([pyAgrum.DAG](#) (page 119)) – an initial DAG structure

**setMaxIndegree** (*BNLearner self, int max\_indegree*)

**setMaxIter** (*BNLearner self, int max*)  
  
**Parameters** **max** (*int*) – the maximum number of iteration  
  
**Raises** gum.OutOfLowerBound – If max <= 1

**setMaxTime** (*BNLearner self, double timeout*)  
  
**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)  
  
**Raises** gum.OutOfLowerBound – If timeout<=0.0

**setMinEpsilonRate** (*BNLearner self, double rate*)  
  
**Parameters** **rate** (*double*) – the minimal epsilon rate

**setPeriodSize** (*BNLearner self, int p*)  
  
**Parameters** **p** (*int*) – number of samples between 2 stopping  
  
**Raises** gum.OutOfLowerBound – If p<1

```
setPossibleSkeleton (BNLearner self, UndiGraph skeleton)
setRecordWeight (BNLearner self, size_t i, double weight)
setSliceOrder (BNLearner self, PyObject * l)
    setSliceOrder(BNLearner self, pyAgrum.NodeProperty< int > slice_order) setSliceOrder(BNLearner self, vector< vector< str,allocator< str > >,allocator< vector< str,allocator< str > > > > slices)

    Set a partial order on the nodes.

    Parameters l (list) – a list of sequences (composed of ids of rows or string)

setVerbosity (BNLearner self, bool v)
    Parameters v (bool) – verbosity

use3off2 (BNLearner self)
    Indicate that we wish to use 3off2.

useAprioriBDeu (BNLearner self, double weight=1)
    useAprioriBDeu(BNLearner self)

    The BDeu apriori adds weight to all the cells of the counting tables. In other words, it adds weight rows in the database with equally probable values.

    Parameters weight (double) – the apriori weight

useAprioriDirichlet (BNLearner self, str filename, double weight=1)
    useAprioriDirichlet(BNLearner self, str filename)

useAprioriSmoothing (BNLearner self, double weight=1)
    useAprioriSmoothing(BNLearner self)

useEM (BNLearner self, double epsilon)
    Indicates if we use EM for parameter learning.

    Parameters epsilon (double) – if epsilon=0.0 then EM is not used if epsilon>0 then EM is used and stops when the sum of the cumulative squared error on parameters is less than epsilon.

useGreedyHillClimbing (BNLearner self)

useK2 (BNLearner self, PyObject * l)
    useK2(BNLearner self, pyAgrum.Sequence< int > order) useK2(BNLearner self, vector< int,allocator< int > > order)

    Indicate that we wish to use K2.

    Parameters order (list) – a list of ids

useLocalSearchWithTabuList (BNLearner self, int tabu_size=100, int nb_decrease=2)
    useLocalSearchWithTabuList(BNLearner self, int tabu_size=100) useLocalSearchWithTabuList(BNLearner self)

    Indicate that we wish to use a local search with tabu list

    Parameters
        • tabu_size (int) – The size of the tabu list
        • nb_decrease (int) – The max number of changes decreasing the score consecutively that we allow to apply

useMDL (BNLearner self)
    Indicate that we wish to use the MDL correction for 3off2 or MIIC

useMIIC (BNLearner self)
    Indicate that we wish to use MIIC.

useNML (BNLearner self)
    Indicate that we wish to use the NML correction for 3off2 or MIIC
```

**useNoApriori** (*BNLearner self*)

**useNoCorr** (*BNLearner self*)

Indicate that we wish to use the NoCorr correction for 3off2 or MIIC

**useScoreAIC** (*BNLearner self*)

**useScoreBD** (*BNLearner self*)

**useScoreBDeu** (*BNLearner self*)

**useScoreBIC** (*BNLearner self*)

**useScoreK2** (*BNLearner self*)

**useScoreLog2Likelihood** (*BNLearner self*)

**verbosity** (*BNLearner self*)

**Returns** True if the verbosity is enabled

**Return type** bool



# CHAPTER 2

---

## Graphs manipulation

---

In aGrUM, graphs are undirected (using edges), directed (using arcs) or mixed (using both arcs and edges). Some other types of graphs are described below. Edges and arcs are represented by pairs of int (nodeId), but these pairs are considered as unordered for edges whereas they are ordered for arcs.

For all types of graphs, nodes are int. If a graph of objects is needed (like `pyAgrum.BayesNet` (page 3)), the objects are mapped to nodeIds.

## 2.1 Edges and Arcs

### 2.1.1 Arc

**class** `pyAgrum.Arc(*args)`

`pyAgrum.Arc` is the representation of an arc between two nodes represented by int : the head and the tail.

**Arc(tail, head) -> Arc**

**Parameters:**

- **tail (int)** – the tail
- **head (int)** – the head

**Arc(src) -> Arc**

**Parameters:**

- **src (Arc)** – the gum.Arc to copy

**first (Arc self)**

**Returns** the nodeId of the first node of the arc (the tail)

**Return type** int

**head (Arc self)**

**Returns** the id of the head node

**Return type** int

**other (Arc self, int id)**

**Parameters** `id` (*int*) – the nodeId of the head or the tail  
**Returns** the nodeId of the other node  
**Return type** int

**second** (*Arc self*)  
**Returns** the nodeId of the second node of the arc (the head)  
**Return type** int

**tail** (*Arc self*)  
**Returns** the id of the tail node  
**Return type** int

## 2.1.2 Edge

**class** `pyAgrum.Edge (*args)`

`pyAgrum.Edge` is the representation of an arc between two nodes represented by `int` : the first and the second.

**Edge(aN1,aN2) -> Edge**

**Parameters:**

- `aN1` (*int*) – the nodeId of the first node
- `aN2` (*int*) – the nodeId of the secondnode

**Edge(src) -> Edge**

**Parameters:**

- `src` (*yAgrum.Edge*) – the Edge to copy

**first** (*Edge self*)

**Returns** the nodeId of the first node of the arc (the tail)

**Return type** int

**other** (*Edge self, int id*)

**Parameters** `id` (*int*) – the nodeId of one of the nodes of the Edge

**Returns** the nodeId of the other node

**Return type** int

**second** (*Edge self*)

**Returns** the nodeId of the second node of the arc (the head)

**Return type** int

## 2.2 Directed Graphs

### 2.2.1 Digraph

**class** `pyAgrum.DiGraph (*args)`

`DiGraph` represents a Directed Graph.

**DiGraph() -> DiGraph** default constructor

**DiGraph(src) -> DiGraph**

**Parameters:**

- **src** (*pyAgrum.DiGraph*) – the digraph to copy

**addArc** (*DiGraph self*, *int tail*, *int head*)  
 addArc(*DiGraph self*, *int n1*, *int n2*)

Add an arc from tail to head.

**Parameters**

- **tail** (*int*) – the id of the tail node
- **head** (*int*) – the id of the head node

**Raises** `gum.InvalidNode` – If head or tail does not belong to the graph nodes.

**addNode** (*DiGraph self*)

**Returns** the new NodeId

**Return type** int

**addNodeWithId** (*DiGraph self*, *int id*)

Add a node by choosing a new NodeId.

**Parameters** **id** (*int*) – The id of the new node

**Raises** `gum.DuplicateElement` – If the given id is already used

**addNodes** (*DiGraph self*, *int n*)

Add n nodes.

**Parameters** **n** (*int*) – the number of nodes to add.

**Returns** the new ids

**Return type** Set of int

**arcs** (*DiGraph self*)

**Returns** the list of the arcs

**Return type** List

**children** (*DiGraph self*, *int id*)

**Parameters** **id** (*int*) – the id of the parent

**Returns** the set of all the children

**Return type** Set

**clear** (*DiGraph self*)

Remove all the nodes and arcs from the graph.

**connectedComponents** ()

connected components from a graph/BN

Compute the connected components of a pyAgrum's graph or Bayesian Network (more generally an object that has *nodes*, *children/parents* or *neighbours* methods)

The firstly visited node for each component is called a ‘root’ and is used as a key for the component. This root has been arbitrarily chosen during the algorithm.

**Parameters** **graph** (*pyAgrum's graph*) – A graph, a Bayesian network, more generally an object that has *nodes*, *children/parents* or *neighbours* methods in which the search will take place

**Returns** dict of connected components (as set of nodeIds (int)) with a nodeId (root) of each component as key.

**Return type** dict(int,Set[int])

**empty** (*DiGraph self*)

Check if the graph is empty.

**Returns** True if the graph is empty

**Return type** bool

**emptyArcs** (*DiGraph self*)

Check if the graph doesn't contains arcs.

**Returns** True if the graph doesn't contains arcs

**Return type** bool

**eraseArc** (*DiGraph self, int n1, int n2*)

Erase the arc between n1 and n2.

**Parameters**

- **n1** (*int*) – the id of the tail node
- **n2** (*int*) – the id of the head node

**eraseChildren** (*DiGraph self, int n*)

Erase the arcs heading through the node's children.

**Parameters** **n** (*int*) – the id of the parent node

**eraseNode** (*DiGraph self, int id*)

Erase the node and all the related arcs.

**Parameters** **id** (*int*) – the id of the node

**eraseParents** (*DiGraph self, int n*)

Erase the arcs coming to the node.

**Parameters** **n** (*int*) – the id of the child node

**existsArc** (*DiGraph self, int n1, int n2*)

Check if an arc exists bewteen n1 and n2.

**Parameters**

- **n1** (*int*) – the id of the tail node
- **n2** (*int*) – the id of the head node

**Returns** True if the arc exists

**Return type** bool

**existsNode** (*DiGraph self, int id*)

Check if a node with a certain id exists in the graph.

**Parameters** **id** (*int*) – the checked id

**Returns** True if the node exists

**Return type** bool

**hasDirectedPath** (*DiGraph self, int \_from, int to*)

Check if a directedpath exists bewteen from and to.

**Parameters**

- **from** (*int*) – the id of the first node of the (possible) path
- **to** (*int*) – the id of the last node of the (possible) path

**Returns** True if the directed path exists

**Return type** bool

---

**ids ()**  
Deprecated method in pyAgrum>0.12.0. See nodes instead.

**nodes (DiGraph self)**

**Returns** the set of ids

**Return type** set

**parents (DiGraph self, int id)**

**Parameters** **id** – The id of the child node

**Returns** the set of the parents ids.

**Return type** Set

**size (DiGraph self)**

**Returns** the number of nodes in the graph

**Return type** int

**sizeArcs (DiGraph self)**

**Returns** the number of arcs in the graph

**Return type** int

**toDot (DiGraph self)**

**Returns** a friendly display of the graph in DOT format

**Return type** str

**topologicalOrder (DiGraph self, bool clear=True)**

**Returns** the list of the nodes Ids in a topological order

**Return type** List

**Raises** gum.InvalidDirectedCycle – If this graph contains cycles

## 2.2.2 Directed Acyclic Graph

**class** pyAgrum.DAG (\*args)

DAG represents a Directed Acyclic Graph.

**DAG() -> DAG** default constructor

**DAG(src) -> DAG**

**Parameters:**

- **src (DAG)** – the DAG to copy

**addArc (DAG self, int tail, int head)**

addArc(DAG self, int n1, int n2)

Add an arc from tail to head.

**Parameters**

- **tail (int)** – the id of the tail node
- **head (int)** – the id of the head node

**Raises**

- gum.InvalidDirectedCircle – If any (directed) cycle is created by this arc
- gum.InvalidNode – If head or tail does not belong to the graph nodes

**addNode (DiGraph self)**

**Returns** the new NodeId

**Return type** int

**addNodeWithId** (*DiGraph self, int id*)

Add a node by choosing a new NodeId.

**Parameters** **id** (*int*) – The id of the new node

**Raises** `gum.DuplicateElement` – If the given id is already used

**addNodes** (*DiGraph self, int n*)

Add n nodes.

**Parameters** **n** (*int*) – the number of nodes to add.

**Returns** the new ids

**Return type** Set of int

**arcs** (*DiGraph self*)

**Returns** the list of the arcs

**Return type** List

**children** (*DiGraph self, int id*)

**Parameters** **id** (*int*) – the id of the parent

**Returns** the set of all the children

**Return type** Set

**clear** (*DiGraph self*)

Remove all the nodes and arcs from the graph.

**connectedComponents** ()

connected components from a graph/BN

Compute the connected components of a pyAgrum's graph or Bayesian Network (more generally an object that has *nodes*, *children/parents* or *neighbours* methods)

The firstly visited node for each component is called a ‘root’ and is used as a key for the component. This root has been arbitrarily chosen during the algorithm.

**Parameters** **graph** (*pyAgrum's graph*) – A graph, a Bayesian network, more generally an object that has *nodes*, *children/parents* or *neighbours* methods in which the search will take place

**Returns** dict of connected components (as set of nodeIds (int)) with a nodeId (root) of each component as key.

**Return type** dict(int,Set[int])

**empty** (*DiGraph self*)

Check if the graph is empty.

**Returns** True if the graph is empty

**Return type** bool

**emptyArcs** (*DAG self*)

**eraseArc** (*DAG self, int n1, int n2*)

**eraseChildren** (*DAG self, int n*)

**eraseNode** (*DiGraph self, int id*)

Erase the node and all the related arcs.

**Parameters** **id** (*int*) – the id of the node

**eraseParents** (*DAG self, int n*)

**existsArc** (*DAG self, int n1, int n2*)

**existsNode** (*DiGraph self, int id*)

Check if a node with a certain id exists in the graph.

**Parameters** **id** (*int*) – the checked id

**Returns** True if the node exists

**Return type** bool

**hasDirectedPath** (*DiGraph self, int \_from, int to*)

Check if a directedpath exists bewteen from and to.

**Parameters**

- **from** (*int*) – the id of the first node of the (possible) path

- **to** (*int*) – the id of the last node of the (possible) path

**Returns** True if the directed path exists

**Return type** bool

**ids()**

Deprecated method in pyAgrum>0.12.0. See nodes instead.

**moralGraph** (*DAG self*)

**nodes** (*DiGraph self*)

**Returns** the set of ids

**Return type** set

**parents** (*DiGraph self, int id*)

**Parameters** **id** – The id of the child node

**Returns** the set of the parents ids.

**Return type** Set

**size** (*DiGraph self*)

**Returns** the number of nodes in the graph

**Return type** int

**sizeArcs** (*DAG self*)

**toDot** (*DiGraph self*)

**Returns** a friendly display of the graph in DOT format

**Return type** str

**topologicalOrder** (*DiGraph self, bool clear=True*)

**Returns** the list of the nodes Ids in a topological order

**Return type** List

**Raises** `gum.InvalidDirectedCycle` – If this graph contains cycles

## 2.3 Undirected Graphs

### 2.3.1 UndiGraph

```
class pyAgrum.UndiGraph(*args)
    UndiGraph represents an Undirected Graph.
```

**UndiGraph()** -> **UndiGraph** default constructor

**UndiGraph(src)** -> **UndiGraph**

**Parameters!**

- **src** (*UndiGraph*) – the pyAgrum.UndiGraph to copy

**addEdge** (*UndiGraph self*, int *n1*, int *n2*)

Insert a new edge into the graph.

**Parameters**

- **n1** (*int*) – the id of one node of the new inserted edge
- **n2** (*int*) – the id of the other node of the new inserted edge

**Raises** `gum.InvalidNode` – If *n1* or *n2* does not belong to the graph nodes.

**addNode** (*UndiGraph self*)

**Returns** the new NodeId

**Return type** int

**addNodeWithId** (*UndiGraph self*, int *id*)

Add a node by choosing a new NodeId.

**Parameters** **id** (*int*) – The id of the new node

**Raises** `gum.DuplicateElement` – If the given id is already used

**addNodes** (*UndiGraph self*, int *n*)

Add *n* nodes.

**Parameters** **n** (*int*) – the number of nodes to add.

**Returns** the new ids

**Return type** Set of int

**clear** (*UndiGraph self*)

Remove all the nodes and edges from the graph.

**connectedComponents** ()

connected components from a graph/BN

Compute the connected components of a pyAgrum's graph or Bayesian Network (more generally an object that has *nodes*, *children/parents* or *neighbours* methods)

The firstly visited node for each component is called a ‘root’ and is used as a key for the component. This root has been arbitrarily chosen during the algorithm.

**Parameters** **graph** (*pyAgrum's graph*) – A graph, a Bayesian network, more generally an object that has *nodes*, *children/parents* or *neighbours* methods in which the search will take place

**Returns** dict of connected components (as set of nodeIds (int)) with a nodeId (root) of each component as key.

**Return type** dict(int,Set[int])

**edges** (*UndiGraph self*)

**Returns** the list of the edges

**Return type** List

**empty** (*UndiGraph self*)

Check if the graph is empty.

**Returns** True if the graph is empty

**Return type** bool

**emptyEdges** (*UndiGraph self*)

Check if the graph doesn't contains edges.

**Returns** True if the graph doesn't contains edges

**Return type** bool

**eraseEdge** (*UndiGraph self, int n1, int n2*)

Erase the edge between n1 and n2.

**Parameters**

- **n1** (*int*) – the id of the tail node
- **n2** (*int*) – the id of the head node

**eraseNeighbours** (*UndiGraph self, int n*)

Erase all the edges adjacent to a given node.

**Parameters** **n** (*int*) – the id of the node

**eraseNode** (*UndiGraph self, int id*)

Erase the node and all the adjacent edges.

**Parameters** **id** (*int*) – the id of the node

**existsEdge** (*UndiGraph self, int n1, int n2*)

Check if an edge exists bewteen n1 and n2.

**Parameters**

- **n1** (*int*) – the id of one extremity of the edge
- **n2** (*int*) – the id of the other extremity if tge edge

**Returns** True if the arc exists

**Return type** bool

**existsNode** (*UndiGraph self, int id*)

Check if a node with a certain id exists in the graph.

**Parameters** **id** (*int*) – the checked id

**Returns** True if the node exists

**Return type** bool

**hasUndirectedCycle** (*UndiGraph self*)

Checks whether the graph contains cycles.

**Returns** True if the graph contains a cycle

**Return type** bool

**ids()**

Deprecated method in pyAgrum>0.12.0. See nodes instead.

**neighbours** (*UndiGraph self, int id*)

**Parameters** **id** (*int*) – the id of the checked node

**Returns** The set of edges adjacent to the given node

**Return type** Set

**nodes** (*UndiGraph self*)

**Returns** the set of ids

**Return type** set

**partialUndiGraph** (*UndiGraph self, Set nodesSet*)

**Parameters** **nodesSet** (*Set*) – The set of nodes composing the partial graph

**Returns** The partial graph formed by the nodes given in parameter  
**Return type** [pyAgrum.UndiGraph](#) (page 121)

**size** (*UndiGraph self*)

**Returns** the number of nodes in the graph  
**Return type** int

**sizeEdges** (*UndiGraph self*)

**Returns** the number of edges in the graph  
**Return type** int

**toDot** (*UndiGraph self*)

**Returns** a friendly display of the graph in DOT format  
**Return type** str

### 2.3.2 Clique Graph

```
class pyAgrum.CliqueGraph (*args)
    CliqueGraph represents a Clique Graph.

    CliqueGraph() -> CliqueGraph default constructor

    CliqueGraph(src) -> CliqueGraph

        Parameter
            • src (pyAgrum.CliqueGraph) – the CliqueGraph to copy

    addEdge (CliqueGraph self, int first, int second)
        Insert a new edge into the graph.

        Parameters
            • n1 (int) – the id of one node of the new inserted edge
            • n2 (int) – the id of the other node of the new inserted edge

        Raises gum.InvalidNode – If n1 or n2 does not belong to the graph nodes.

    addNode (CliqueGraph self, Set clique)
        addNode(CliqueGraph self) -> int addNode(CliqueGraph self, int id, Set clique)
        addNode(CliqueGraph self, int id)

        Returns the new NodeId
        Return type int

    addNodeWithId (UndiGraph self, int id)
        Add a node by choosing a new NodeId.

        Parameters id (int) – The id of the new node
        Raises gum.DuplicateElement – If the given id is already used

    addNodes (UndiGraph self, int n)
        Add n nodes.

        Parameters n (int) – the number of nodes to add.
        Returns the new ids
        Return type Set of int

    addToClique (CliqueGraph self, int clique_id, int node_id)
        Change the set of nodes included into a given clique and returns the new set
```

**Parameters**

- **clique\_id** (*int*) – the id of the clique
- **node\_id** (*int*) – the id of the node

**Raises**

- `gum.NotFound` – If clique\_id does not exist
- `gum.DuplicateElement` – If clique\_id set already contains the node

**clear** (*CliqueGraph self*)

Remove all the nodes and edges from the graph.

**clearEdges** (*CliqueGraph self*)

Remove all edges and their separators

**clique** (*CliqueGraph self, int clique*)**Parameters** **idClique** (*int*) – the id of the clique**Returns** The set of nodes included in the clique**Return type** Set**Raises** `gum.NotFound` – If the clique does not belong to the clique graph**connectedComponents** ()

connected components from a graph/BN

Compute the connected components of a pyAgrum's graph or Bayesian Network (more generally an object that has *nodes*, *children/parents* or *neighbours* methods)

The firstly visited node for each component is called a ‘root’ and is used as a key for the component. This root has been arbitrarily chosen during the algorithm.

**Parameters** **graph** (*pyAgrum's graph*) – A graph, a Bayesian network, more generally an object that has *nodes*, *children/parents* or *neighbours* methods in which the search will take place**Returns** dict of connected components (as set of nodeIds (*int*)) with a nodeId (root) of each component as key.**Return type** dict(*int*,*Set[int]*)**container** (*CliqueGraph self, int idNode*)**Parameters** **idNode** (*int*) – the id of the node**Returns** the id of a clique containing the node**Return type** int**Raises** `gum.NotFound` – If no clique contains idNode**containerPath** (*CliqueGraph self, int node1, int node2*)**Parameters**

- **node1** (*int*) – the id of one node
- **node2** (*int*) – the id of the other node

**Returns** a path from a clique containing node1 to a clique containing node2**Return type** List**Raises** `gum.NotFound` – If such path cannot be found**edges** (*UndiGraph self*)**Returns** the list of the edges**Return type** List

**empty** (*UndiGraph self*)

Check if the graph is empty.

**Returns** True if the graph is empty

**Return type** bool

**emptyEdges** (*UndiGraph self*)

Check if the graph doesn't contains edges.

**Returns** True if the graph doesn't contains edges

**Return type** bool

**eraseEdge** (*CliqueGraph self, Edge edge*)

Erase the edge between n1 and n2.

**Parameters**

- **n1** (*int*) – the id of the tail node
- **n2** (*int*) – the id of the head node

**eraseFromClique** (*CliqueGraph self, int clique\_id, int node\_id*)

Remove a node from a clique

**Parameters**

- **clique\_id** (*int*) – the id of the clique
- **node\_id** (*int*) – the id of the node

**Raises** `gum.NotFound` – If clique\_id does not exist

**eraseNeighbours** (*UndiGraph self, int n*)

Erase all the edges adjacent to a given node.

**Parameters** **n** (*int*) – the id of the node

**eraseNode** (*CliqueGraph self, int node*)

Erase the node and all the adjacent edges.

**Parameters** **id** (*int*) – the id of the node

**existsEdge** (*UndiGraph self, int n1, int n2*)

Check if an edge exists bewteen n1 and n2.

**Parameters**

- **n1** (*int*) – the id of one extremity of the edge
- **n2** (*int*) – the id of the other extremity if tge edge

**Returns** True if the arc exists

**Return type** bool

**existsNode** (*UndiGraph self, int id*)

Check if a node with a certain id exists in the graph.

**Parameters** **id** (*int*) – the checked id

**Returns** True if the node exists

**Return type** bool

**hasRunningIntersection** (*CliqueGraph self*)

**Returns** True if the running intersection property holds

**Return type** bool

**hasUndirectedCycle** (*UndiGraph self*)

Checks whether the graph contains cycles.

**Returns** True if the graph contains a cycle

**Return type** bool

**ids()**  
Deprecated method in pyAgrum>0.12.0. See nodes instead.

**isJoinTree (CliqueGraph self)**

**Returns** True if the graph is a join tree

**Return type** bool

**neighbours (UndiGraph self, int id)**

**Parameters** **id** (*int*) – the id of the checked node

**Returns** The set of edges adjacent to the given node

**Return type** Set

**nodes (UndiGraph self)**

**Returns** the set of ids

**Return type** set

**partialUndiGraph (UndiGraph self, Set nodesSet)**

**Parameters** **nodesSet** (*Set*) – The set of nodes composing the partial graph

**Returns** The partial graph formed by the nodes given in parameter

**Return type** [pyAgrum.UndiGraph](#) (page 121)

**separator (CliqueGraph self, int cliq1, int cliq2)**

**Parameters**

- **edge** ([pyAgrum.Edge](#) (page 116)) – the edge to be checked
- **clique1** (*int*) – one extremity of the edge
- **clique2** (*int*) – the other extremity of the edge

**Returns** the separator included in a given edge

**Return type** Set

**Raises** `gum.NotFound` – If the edge does not belong to the clique graph

**setClique (CliqueGraph self, int idClique, Set new\_clique)**  
changes the set of nodes included into a given clique

**Parameters**

- **idClique** (*int*) – the id of the clique
- **new\_clique** (*Set*) – the new set of nodes to be included in the clique

**Raises** `gum.NotFound` – If idClique is not a clique of the graph

**size (UndiGraph self)**

**Returns** the number of nodes in the graph

**Return type** int

**sizeEdges (UndiGraph self)**

**Returns** the number of edges in the graph

**Return type** int

**toDot (CliqueGraph self)**

**Returns** a friendly display of the graph in DOT format

**Return type** str

**toDotWithNames** (*bn*)

**Parameters**

- **bn** (`pyAgrum.BayesNet` (page 3)) –
- **Bayesian network** (*a*) –

**Returns** a friendly display of the graph in DOT format where ids have been changed according to their correspondance in the BN

**Return type** str

## 2.4 Mixed Graph

**class** `pyAgrum.MixedGraph` (\**args*)

MixedGraph represents a graph with both arcs and edges.

**MixedGraph()** -> **MixedGraph** default constructor

**MixedGraph(src)** -> **MixedGraph**

**Parameters:**

- **src** (`pyAgrum.MixedGraph`) – the MixedGraph to copy

**addArc** (*MixedGraph self, int n1, int n2*)

Add an arc from tail to head.

**Parameters**

- **tail** (*int*) – the id of the tail node
- **head** (*int*) – the id of the head node

**Raises** `gum.InvalidNode` – If head or tail does not belong to the graph nodes.

**addEdge** (*MixedGraph self, int n1, int n2*)

Insert a new edge into the graph.

**Parameters**

- **n1** (*int*) – the id of one node of the new inserted edge
- **n2** (*int*) – the id of the other node of the new inserted edge

**Raises** `gum.InvalidNode` – If n1 or n2 does not belong to the graph nodes.

**addNode** (*MixedGraph self*)

**Returns** the new NodeId

**Return type** int

**addNodeWithId** (*MixedGraph self, int id*)

Add a node by choosing a new NodeId.

**Parameters** **id** (*int*) – The id of the new node

**Raises** `gum.DuplicateElement` – If the given id is already used

**addNodes** (*MixedGraph self, int n*)

Add n nodes.

**Parameters** **n** (*int*) – the number of nodes to add.

**Returns** the new ids

**Return type** Set of int

**arcs** (*DiGraph self*)

**Returns** the list of the arcs

**Return type** List

**children** (*DiGraph self, int id*)

**Parameters** **id** (*int*) – the id of the parent

**Returns** the set of all the children

**Return type** Set

**clear** (*MixedGraph self*)

Remove all the nodes and edges from the graph.

**connectedComponents** ()

connected components from a graph/BN

Compute the connected components of a pyAgrum's graph or Bayesian Network (more generally an object that has *nodes*, *children/parents* or *neighbours* methods)

The firstly visited node for each component is called a ‘root’ and is used as a key for the component. This root has been arbitrarily chosen during the algorithm.

**Parameters** **graph** (*pyAgrum's graph*) – A graph, a Bayesian network, more generally an object that has *nodes*, *children/parents* or *neighbours* methods in which the search will take place

**Returns** dict of connected components (as set of nodeId (int)) with a nodeId (root) of each component as key.

**Return type** dict(int,Set[int])

**edges** (*UndiGraph self*)

**Returns** the list of the edges

**Return type** List

**empty** (*MixedGraph self*)

Check if the graph is empty.

**Returns** True if the graph is empty

**Return type** bool

**emptyArcs** (*MixedGraph self*)

Check if the graph doesn't contains arcs.

**Returns** True if the graph doesn't contains arcs

**Return type** bool

**emptyEdges** (*MixedGraph self*)

Check if the graph doesn't contains edges.

**Returns** True if the graph doesn't contains edges

**Return type** bool

**eraseArc** (*MixedGraph self, int n1, int n2*)

Erase the arc between n1 and n2.

**Parameters**

- **n1** (*int*) – the id of the tail node
- **n2** (*int*) – the id of the head node

**eraseChildren** (*MixedGraph self, int n*)

Erase the arcs heading through the node's children.

**Parameters** `n` (*int*) – the id of the parent node

**eraseEdge** (*MixedGraph self, int n1, int n2*)

Erase the edge between n1 and n2.

**Parameters**

- `n1` (*int*) – the id of the tail node

- `n2` (*int*) – the id of the head node

**eraseNeighbours** (*MixedGraph self, int n*)

Erase all the edges adjacent to a given node.

**Parameters** `n` (*int*) – the id of the node

**eraseNode** (*MixedGraph self, int id*)

Erase the node and all the related arcs and edges.

**Parameters** `id` (*int*) – the id of the node

**eraseParents** (*MixedGraph self, int n*)

Erase the arcs coming to the node.

**Parameters** `n` (*int*) – the id of the child node

**existsArc** (*MixedGraph self, int n1, int n2*)

Check if an arc exists bewteen n1 and n2.

**Parameters**

- `n1` (*int*) – the id of the tail node

- `n2` (*int*) – the id of the head node

**Returns** True if the arc exists

**Return type** bool

**existsEdge** (*MixedGraph self, int n1, int n2*)

Check if an edge exists bewteen n1 and n2.

**Parameters**

- `n1` (*int*) – the id of one extremity of the edge

- `n2` (*int*) – the id of the other extremity if tge edge

**Returns** True if the arc exists

**Return type** bool

**existsNode** (*MixedGraph self, int id*)

Check if a node with a certain id exists in the graph.

**Parameters** `id` (*int*) – the checked id

**Returns** True if the node exists

**Return type** bool

**hasDirectedPath** (*DiGraph self, int \_from, int to*)

Check if a directedpath exists bewteen from and to.

**Parameters**

- `from` (*int*) – the id of the first node of the (possible) path

- `to` (*int*) – the id of the last node of the (possible) path

**Returns** True if the directed path exists

**Return type** bool

**hasUndirectedCycle** (*UndiGraph self*)

Checks whether the graph contains cycles.

**Returns** True if the graph contains a cycle

**Return type** bool

**ids()**

Deprecated method in pyAgrum>0.12.0. See nodes instead.

**mixedOrientedPath** (*MixedGraph self, int node1, int node2*)

**Parameters**

- **node1** (*int*) – the id from which the path begins
- **node2** (*int*) – the id to which the path ends

**Returns** a path from node1 to node2, using edges and/or arcs (following the direction of the arcs)

**Return type** List

**Raises** `gum.NotFound` – If no path can be found between the two nodes

**mixedUnorientedPath** (*MixedGraph self, int node1, int node2*)

**Parameters**

- **node1** (*int*) – the id from which the path begins
- **node2** (*int*) – the id to which the path ends

**Returns** a path from node1 to node2, using edges and/or arcs (not necessarily following the direction of the arcs)

**Return type** List

**Raises** `gum.NotFound` – If no path can be found between the two nodes

**neighbours** (*UndiGraph self, int id*)

**Parameters** **id** (*int*) – the id of the checked node

**Returns** The set of edges adjacent to the given node

**Return type** Set

**nodes** (*UndiGraph self*)

**Returns** the set of ids

**Return type** set

**parents** (*DiGraph self, int id*)

**Parameters** **id** – The id of the child node

**Returns** the set of the parents ids.

**Return type** Set

**partialUndiGraph** (*UndiGraph self, Set nodesSet*)

**Parameters** **nodesSet** (*Set*) – The set of nodes composing the partial graph

**Returns** The partial graph formed by the nodes given in parameter

**Return type** [pyAgrum.UndiGraph](#) (page 121)

**size** (*MixedGraph self*)

**Returns** the number of nodes in the graph

**Return type** int

**sizeArcs** (*MixedGraph self*)

**Returns** the number of arcs in the graph

**Return type** int

**sizeEdges** (*MixedGraph self*)

**Returns** the number of edges in the graph

**Return type** int

**toDot** (*MixedGraph self*)

**Returns** a friendly display of the graph in DOT format

**Return type** str

**topologicalOrder** (*DiGraph self, bool clear=True*)

**Returns** the list of the nodes Ids in a topological order

**Return type** List

**Raises** `gum.InvalidDirectedCycle` – If this graph contains cycles

# CHAPTER 3

---

## Random Variables

---

aGrUM/pyAgrum is currently dedicated for discrete probability distributions.

There are 3 types of discrete random variables in aGrUM/pyAgrum: LabelizedVariable, DiscretizedVariable and RangeVariable. The 3 types are mainly provided in order to ease modelization. Derived from DiscreteVariable, they share a common API. They essentially differ by the means to create, name and access to their modalities.

### 3.1 Common API for Random Discrete Variables

```
class pyAgrum.DiscreteVariable(*args, **kwargs)
```

DiscreteVariable is the base class for discrete random variables.

```
DiscreteVariable(aName, aDesc='') -> DiscreteVariable
```

**Parameters:**

- **aName** (*str*) – the name of the variable
- **aDesc** (*str*) – the (optional) description of the variable

```
DiscreteVariable(aDRV) -> DiscreteVariable
```

**Parameters:**

- **aDRV** (*pyAgrum.DiscreteVariable*) – the pyAgrum.DiscreteVariable that will be copied

```
description (Variable self)
```

**Returns** the description of the variable

**Return type** str

```
domain (DiscreteVariable self)
```

**Returns** the domain of the variable

**Return type** str

```
domainSize (DiscreteVariable self)
```

**Returns** the number of modalities in the variable domain

**Return type** int

```
empty (DiscreteVariable self)
```

**Returns** True if the domain size < 2

**Return type** bool

**index** (*DiscreteVariable self, str label*)

**Parameters** **label** (*str*) – a label

**Returns** the indice of the label

**Return type** int

**label** (*DiscreteVariable self, int i*)

**Parameters** **i** (*int*) – the index of the label we wish to return

**Returns** the indice-th label

**Return type** str

**Raises** `gum.OutOfBounds` – If the variable does not contain the label

**labels** (*DiscreteVariable self*)

**Returns** a tuple containing the labels

**Return type** tuple

**name** (*Variable self*)

**Returns** the name of the variable

**Return type** str

**numerical** (*DiscreteVariable self, int indice*)

**Parameters** **indice** (*int*) – an index

**Returns** the numerical representation of the indice-th value

**Return type** float

**setDescription** (*Variable self, str theValue*)

set the description of the variable.

**Parameters** **theValue** (*str*) – the new description of the variable

**setName** (*Variable self, str theValue*)

sets the name of the variable.

**Parameters** **theValue** (*str*) – the new description of the variable

**toDiscretizedVar** (*DiscreteVariable self*)

**Returns** the discretized variable

**Return type** `pyAgrum.DiscretizedVariable` (page 138)

**Raises** `gum.RuntimeError` – If the variable is not a DiscretizedVariable

**toLabelizedVar** (*DiscreteVariable self*)

**Returns** the labeled variable

**Return type** `pyAgrum.LabelizedVariable` (page 135)

**Raises** `gum.RuntimeError` – If the variable is not a LabelizedVariable

**toRangeVar** (*DiscreteVariable self*)

**Returns** the range variable

**Return type** `pyAgrum.RangeVariable` (page 140)

**Raises** `gum.RuntimeError` – If the variable is not a RangeVariable

**toStringWithDescription** (*DiscreteVariable self*)

**Returns** a description of the variable  
**Return type** str

**varType** (*DiscreteVariable self*)  
 returns the type of variable

**Returns** the type of the variable, 0: DiscretizedVariable, 1: LabelizedVariable, 2: RangeVariable

**Return type** int

## 3.2 Concrete classes for Random Discrete Variables

### 3.2.1 LabelizedVariable

**class** pyAgrum.LabelizedVariable(\*args)

LabelizedVariable is a discrete random variable with a customizable sequence of labels.

**LabelizedVariable(aName, aDesc='', nbrLabel=2) -> LabelizedVariable**

**Parameters:**

- **aName** (str) – the name of the variable
- **aDesc** (str) – the (optional) description of the variable
- **nbrLabel** (int) – the number of labels to create (2 by default)

**LabelizedVariable(aLDRV) -> LabelizedVariable**

**Parameters:**

- **aLDRV** (pyAgrum.LabelizedVariable) – The pyAgrum.LabelizedVariable that will be copied

### Examples

```
>>> import pyAgrum as gum
>>>
>>> # creating a variable with 3 labels : '0', '1' and '2'
>>> va=gum.LabelizedVariable('a','a labeled variable',3)
>>> print(va)
>>> ## a<0,1,2>
>>>
>>> va.addLabel('foo')
>>> print(va)
>>> ## a<0,1,2,foo>
>>>
>>> va.chgLabel(1,'bar')
>>> print(va)
>>> a<0,bar,2,foo>
>>>
>>> vb=gum.LabelizedVariable('b','b',0).addLabel('A').addLabel('B').addLabel('C
   ')
>>> print(vb)
>>> ## b<A,B,C>
>>>
>>> vb.labels()
>>> ## ('A', 'B', 'C')
>>>
>>> vb.isLabel('E')
>>> ## False
```

(continues on next page)

(continued from previous page)

```
>>>
>>> vb.label(2)
>>> ## 'B'
```

**addLabel** (\*args)

Add a label with a new index (we assume that we will NEVER remove a label).

**Parameters** **aLabel** (*str*) – the label to be added to the labeled variable

**Returns** the labeled variable

**Return type** *pyAgrum.LabelizedVariable* (page 135)

**Raises** *gum.DuplicateElement* – If the variable already contains the label

**changeLabel** (*LabelizedVariable self, int pos, str aLabel*)

Change the label at the specified index

**Parameters**

- **pos** (*int*) – the index of the label to be changed

- **aLabel** (*str*) – the label to be added to the labeled variable

**Raises**

- *gum.DuplicatedElement* – If the variable already contains the new label

- *gum.OutOfBounds* – If the index is greater than the size of the variable

**description** (*Variable self*)

**Returns** the description of the variable

**Return type** str

**domain** (*LabelizedVariable self*)

**Returns** the domain of the variable as a string

**Return type** str

**domainSize** (*LabelizedVariable self*)

**Returns** the number of modalities in the variable domain

**Return type** int

**empty** (*DiscreteVariable self*)

**Returns** True if the domain size < 2

**Return type** bool

**eraseLabels** (*LabelizedVariable self*)

Erase all the labels from the variable.

**index** (*LabelizedVariable self, str label*)

**Parameters** **label** (*str*) – a label

**Returns** the indice of the label

**Return type** int

**isLabel** (*LabelizedVariable self, str aLabel*)

Indicates whether the variable already has the label passed in argument

**Parameters** **aLabel** (*str*) – the label to be tested

**Returns** True if the label already exists

**Return type** bool

**label** (*LabelizedVariable self, int i*)

**Parameters** **i** (*int*) – the index of the label we wish to return

**Returns** the indice-th label

**Return type** str

**Raises** gum.OutOfBounds – If the variable does not contain the label

**labels** (*DiscreteVariable self*)

**Returns** a tuple containing the labels

**Return type** tuple

**name** (*Variable self*)

**Returns** the name of the variable

**Return type** str

**numerical** (*LabelizedVariable self, int indice*)

**Parameters** **indice** (*int*) – an index

**Returns** the numerical representation of the indice-th value

**Return type** float

**posLabel** (*LabelizedVariable self, str label*)

**setDescription** (*Variable self, str theValue*)

set the description of the variable.

**Parameters** **theValue** (*str*) – the new description of the variable

**setName** (*Variable self, str theValue*)

sets the name of the variable.

**Parameters** **theValue** (*str*) – the new description of the variable

**toDiscretizedVar** (*DiscreteVariable self*)

**Returns** the discretized variable

**Return type** [pyAgrum.DiscretizedVariable](#) (page 138)

**Raises** gum.RuntimeError – If the variable is not a DiscretizedVariable

**toLabelizedVar** (*DiscreteVariable self*)

**Returns** the labeled variable

**Return type** [pyAgrum.LabelizedVariable](#) (page 135)

**Raises** gum.RuntimeError – If the variable is not a LabelizedVariable

**toRangeVar** (*DiscreteVariable self*)

**Returns** the range variable

**Return type** [pyAgrum.RangeVariable](#) (page 140)

**Raises** gum.RuntimeError – If the variable is not a RangeVariable

**toStringWithDescription** (*DiscreteVariable self*)

**Returns** a description of the variable

**Return type** str

**varType** (*LabelizedVariable self*)

returns the type of variable

**Returns** the type of the variable, 0: DiscretizedVariable, 1: LabelizedVariable, 2: RangeVariable

**Return type** int

### 3.2.2 DiscretizedVariable

**class** pyAgrum.DiscretizedVariable (\*args)

DiscretizedVariable is a discrete random variable with a set of ticks defining intervals.

**DiscretizedVariable(aName, aDesc='')** -> DiscretizedVariable‘

**Parameters:**

- **aName** (str) – the name of the variable
- **aDesc** (str) – the (optional) description of the variable

**DiscretizedVariable(aDDRV) -> DiscretizedVariable**

**Parameters:**

- **aDDRV** (pyAgrum.DiscretizedVariable) – the pyAgrum.DiscretizedVariable that will be copied

#### Examples

```
>>> import pyAgrum as gum
>>>
>>> vX=gum.DiscretizedVariable('X','X has been discretized')
>>> vX.addTick(1).addTick(2).addTick(3).addTick(3.1415) #doctest: +ELLIPSIS
>>> ## <pyAgrum.DiscretizedVariable;...>
>>> print(vX)
>>> ## X<[1;2[, [2;3[, [3;3.1415]>
>>>
>>> vX.isTick(4)
>>> ## False
>>>
>>> vX.labels()
>>> ## ('[1;2[', '[2;3[', '[3;3.1415]')
>>>
>>> # where is the real value 2.5 ?
>>> vX.index('2.5')
>>> ## 1
```

**addTick (\*args)**

**Parameters** **aTick** (double) – the Tick to be added

**Returns** the discretized variable

**Return type** pyAgrum.DiscretizedVariable (page 138)

**Raises** gum.DefaultInLabel – If the tick is already defined

**description (Variable self)**

**Returns** the description of the variable

**Return type** str

**domain (DiscretizedVariable self)**

**Returns** the domain of the variable as a string

**Return type** str

**domainSize** (*DiscretizedVariable self*)

**Returns** the number of modalities in the variable domain

**Return type** int

**empty** (*DiscreteVariable self*)

**Returns** True if the domain size < 2

**Return type** bool

**eraseTicks** (*DiscretizedVariable self*)

erase all the Ticks

**index** (*DiscretizedVariable self, str label*)

**Parameters** **label** (*str*) – a label

**Returns** the indice of the label

**Return type** int

**isTick** (*DiscretizedVariable self, double aTick*)

**Parameters** **aTick** (*double*) – the Tick to be tested

**Returns** True if the Tick already exists

**Return type** bool

**label** (*DiscretizedVariable self, int i*)

**Parameters** **i** (*int*) – the index of the label we wish to return

**Returns** the indice-th label

**Return type** str

**Raises** `gum.OutOfBounds` – If the variable does not contain the label

**labels** (*DiscreteVariable self*)

**Returns** a tuple containing the labels

**Return type** tuple

**name** (*Variable self*)

**Returns** the name of the variable

**Return type** str

**numerical** (*DiscretizedVariable self, int indice*)

**Parameters** **indice** (*int*) – an index

**Returns** the numerical representation of the indice-th value

**Return type** float

**setDescription** (*Variable self, str theValue*)

set the description of the variable.

**Parameters** **theValue** (*str*) – the new description of the variable

**setName** (*Variable self, str theValue*)

sets the name of the variable.

**Parameters** **theValue** (*str*) – the new description of the variable

**tick** (*DiscretizedVariable self, int i*)

Indicate the index of the Tick

**Parameters** **i** (*int*) – the index of the Tick

**Returns** `aTick` – the index-th Tick  
**Return type** double  
**Raises** `gum.NotFound` – If the index is greater than the number of Ticks

**ticks** (*DiscretizedVariable self*)

**Returns** a tuple containing all the Ticks  
**Return type** tuple

**toDiscretizedVar** (*DiscreteVariable self*)

**Returns** the discretized variable  
**Return type** `pyAgrum.DiscretizedVariable` (page 138)  
**Raises** `gum.RuntimeError` – If the variable is not a DiscretizedVariable

**toLabelizedVar** (*DiscreteVariable self*)

**Returns** the labeled variable  
**Return type** `pyAgrum.LabelizedVariable` (page 135)  
**Raises** `gum.RuntimeError` – If the variable is not a LabelizedVariable

**toRangeVar** (*DiscreteVariable self*)

**Returns** the range variable  
**Return type** `pyAgrum.RangeVariable` (page 140)  
**Raises** `gum.RuntimeError` – If the variable is not a RangeVariable

**toStringWithDescription** (*DiscreteVariable self*)

**Returns** a description of the variable  
**Return type** str

**varType** (*DiscretizedVariable self*)

returns the type of variable

**Returns** the type of the variable, 0: DiscretizedVariable, 1: LabelizedVariable, 2: RangeVariable  
**Return type** int

### 3.2.3 RangeVariable

```
class pyAgrum.RangeVariable(*args)
RangeVariable represents a variable with a range of integers as domain.
```

**RangeVariable(aName, aDesc,minVal, maxVal) -> RangeVariable**

**Parameters:**

- **aName** (str) – the name of the variable
- **aDesc** (str) – the description of the variable
- **minVal** (int) – the minimal integer of the interval
- **maxVal** (int) – the maximal integer of the interval

**RangeVariable(aName, aDesc='') -> RangeVariable**

**Parameters:**

- **aName** (str) – the name of the variable
- **aDesc** (str) – the description of the variable

By default `minVal=0` and `maxVal=1`

### **RangeVariable(aRV) -> RangeVariable**

**Parameters:**

- **aDV (RangeVariable)** – the pyAgrum.RangeVariable that will be copied

### **Examples**

```
>>> import pyAgrum as gum
>>>
>>> vI=gum.gum.RangeVariable('I','I in [4,10]',4,10)
>>> print(vI)
>>> ## I[4-10]
>>>
>>> vX.maxVal()
>>> ## 10
>>>
>>> vX.belongs(1)
>>> ## False
>>>
>>> # where is the value 5 ?
>>> vX.index('5')
>>> ## 1
>>>
>>> vi.labels()
>>> ## ('4', '5', '6', '7', '8', '9', '10')
```

#### **belongs (RangeVariable self, long val)**

**Parameters** `val (long)` – the value to be tested

**Returns** True if the value in parameters belongs to the variable's interval.

**Return type** bool

#### **description (Variable self)**

**Returns** the description of the variable

**Return type** str

#### **domain (RangeVariable self)**

**Returns** the domain of the variable

**Return type** str

#### **domainSize (RangeVariable self)**

**Returns** the number of modalities in the variable domain

**Return type** int

#### **empty (DiscreteVariable self)**

**Returns** True if the domain size < 2

**Return type** bool

#### **index (RangeVariable self, str arg2)**

**Parameters** `arg2 (str)` – a label

**Returns** the indice of the label

**Return type** int

#### **label (RangeVariable self, int indice)**

**Parameters** `indice` (`int`) – the index of the label we wish to return  
**Returns** the indice-th label  
**Return type** str  
**Raises** `gum.OutOfBounds` – If the variable does not contain the label

**labels** (*DiscreteVariable self*)  
**Returns** a tuple containing the labels  
**Return type** tuple

**maxVal** (*RangeVariable self*)  
**Returns** the upper bound of the variable.  
**Return type** long

**minVal** (*RangeVariable self*)  
**Returns** the lower bound of the variable  
**Return type** long

**name** (*Variable self*)  
**Returns** the name of the variable  
**Return type** str

**numerical** (*RangeVariable self, int indice*)  
**Parameters** `indice` (`int`) – an index  
**Returns** the numerical representation of the indice-th value  
**Return type** float

**setDescription** (*Variable self, str theValue*)  
set the description of the variable.  
**Parameters** `theValue` (`str`) – the new description of the variable

**setMaxVal** (*RangeVariable self, long maxVal*)  
Set a new value of the upper bound  
**Parameters** `maxVal` (`long`) – The new value of the upper bound

**Warning:** An error should be raised if the value is lower than the lower bound.

**setMinVal** (*RangeVariable self, long minVal*)  
Set a new value of the lower bound  
**Parameters** `minVal` (`long`) – The new value of the lower bound

**Warning:** An error should be raised if the value is higher than the upper bound.

**setName** (*Variable self, str theValue*)  
sets the name of the variable.  
**Parameters** `theValue` (`str`) – the new description of the variable

**toDiscretizedVar** (*DiscreteVariable self*)  
**Returns** the discretized variable  
**Return type** `pyAgrum.DiscretizedVariable` (page 138)

**Raises** `gum.RuntimeError` – If the variable is not a DiscretizedVariable

**toLabelizedVar** (*DiscreteVariable self*)

**Returns** the labeled variable

**Return type** `pyAgrum.LabelizedVariable` (page 135)

**Raises** `gum.RuntimeError` – If the variable is not a LabelizedVariable

**toRangeVar** (*DiscreteVariable self*)

**Returns** the range variable

**Return type** `pyAgrum.RangeVariable` (page 140)

**Raises** `gum.RuntimeError` – If the variable is not a RangeVariable

**toStringWithDescription** (*DiscreteVariable self*)

**Returns** a description of the variable

**Return type** str

**varType** (*RangeVariable self*)

returns the type of variable

**Returns** the type of the variable, 0: DiscretizedVariable, 1: LabelizedVariable, 2: RangeVariable

**Return type** int



# CHAPTER 4

## Potential and Instantiation

`pyAgrum.Potential` (page 151) is a multi-dimensional array with a `pyAgrum.DiscreteVariable` (page 133) associated to each dimension. It is used to represent probabilities and utilities tables in aGrUMs' multidimensional (graphical) models with some conventions.

- The data are stored by iterating over each variable in the sequence.

```
>>> a=gum.RangeVariable("A","variable A",1,3)
>>> b=gum.RangeVariable("B","variable B",1,2)
>>> p=gum.Potential().add(a).add(b).fillWith([1,2,3,4,5,6]);
>>> print(p)
<A:1|B:1> :: 1 /<A:2|B:1> :: 2 /<A:3|B:1> :: 3 /<A:1|B:2> :: 4 /<A:2|B:2> :: 5 /
-><A:3|B:2> :: 6
```

- If a `pyAgrum.Potential` (page 151) with the sequence of `pyAgrum.DiscreteVariable` (page 133) X,Y,Z represents a conditional probability Table (CPT), it will be  $P(X|Y,Z)$ .

```
>>> print(p.normalizeAsCPT())
<A:1|B:1> :: 0.166667 /<A:2|B:1> :: 0.333333 /<A:3|B:1> :: 0.5 /<A:1|B:2> :: 0.
->266667 /<A:2|B:2> :: 0.333333 /<A:3|B:2> :: 0.4
```

- For addressing and looping in a `pyAgrum.Potential` (page 151) structure, pyAgrum provides Instantiation class which represents a multi-dimensionnal index.

```
>>> I=gum.Instantiation(p)
>>> print(I)
<A:1|B:1>
>>> I.inc();print(I)
<A:2|B:1>
>>> I.inc();print(I)
<A:3|B:1>
>>> I.inc();print(I)
<A:1|B:2>
>>> I.setFirst();print("{} -> {}".format(I,p.get(I)))
<A:1|B:1> -> 0.1666666666666666
>>> I["B"]="2";print("{} -> {}".format(I,p.get(I)))
<A:1|B:2> -> 0.2666666666666666
```

- `pyAgrum.Potential` (page 151) include tensor operators (see for instance this [notebook](http://www-desir.lip6.fr/~phw/aGrUM/docs/last/notebooks/05-potentials.ipynb.html) (<http://www-desir.lip6.fr/~phw/aGrUM/docs/last/notebooks/05-potentials.ipynb.html>)).

```

>>> c=gum.RangeVariable("C","variable C",1,5)
>>> q=gum.Potential().add(a).add(c).fillWith(1)
>>> print(p+q)
<A:1|C:1|B:1> :: 2 /<A:2|C:1|B:1> :: 3 /<A:3|C:1|B:1> :: 4 /<A:1|C:2|B:1> :: 2 /
-><A:2|C:2|B:1> :: 3 /<A:3|C:2|B:1> :: 4 /<A:1|C:3|B:1> :: 2 /<A:2|C:3|B:1> :: 3 /
-><A:3|C:3|B:1> :: 4 /<A:1|C:4|B:1> :: 2 /<A:2|C:4|B:1> :: 3 /<A:3|C:4|B:1> :: 4 /
-><A:1|C:5|B:1> :: 2 /<A:2|C:5|B:1> :: 3 /<A:3|C:5|B:1> :: 4 /<A:1|C:1|B:2> :: 5 /
-><A:2|C:1|B:2> :: 6 /<A:3|C:1|B:2> :: 7 /<A:1|C:2|B:2> :: 5 /<A:2|C:2|B:2> :: 6 /
-><A:3|C:2|B:2> :: 7 /<A:1|C:3|B:2> :: 5 /<A:2|C:3|B:2> :: 6 /<A:3|C:3|B:2> :: 7 /
-><A:1|C:4|B:2> :: 5 /<A:2|C:4|B:2> :: 6 /<A:3|C:4|B:2> :: 7 /<A:1|C:5|B:2> :: 5 /
-><A:2|C:5|B:2> :: 6 /<A:3|C:5|B:2> :: 7
>>> print((p*q).margSumOut(["B","C"])) # marginalize p*q over B and C(using sum)
<A:1> :: 25 /<A:2> :: 35 /<A:3> :: 45

```

## 4.1 Instantiation

**class** pyAgrum.**Instantiation**(\*args)

Class for assigning/browsing values to tuples of discrete variables.

Instantiation is designed to assign values to tuples of variables and to efficiently loop over values of subsets of variables.

**Instantiation() -> Instantiation** default constructor

**Instantiation(ai) -> Instantiation**

**Parameters:**

- **ai** (pyAgrum.Instantiation) – the Instantiation we copy

**Returns**

- *pyAgrum.Instantiation* – An empty tuple or a copy of the one in parameters
- *Instantiation* is subscriptable therefore values can be easily accessed/modified.

### Examples

```

>>> ## Access the value of A in an instantiation ai
>>> valueOfA = ai['A']
>>> ## Modify the value
>>> ai['A'] = newValueOfA

```

**add** (*Instantiation self, DiscreteVariable v*)

Adds a new variable in the Instantiation.

**Parameters** **v** (pyAgrum.DiscreteVariable (page 133)) – The new variable added to the Instantiation

**Raises** *DuplicateElement* (page 227) – If the variable is already in this Instantiation

**chgVal** (*Instantiation self, DiscreteVariable v, int newval*)

chgVal(Instantiation self, DiscreteVariable v, int newval) -> Instantiation chgVal(Instantiation self, int varPos, int newval) -> Instantiation chgVal(Instantiation self, str var, int newval) -> Instantiation chgVal(Instantiation self, str var, str newval) -> Instantiation

Assign newval to v (or to the variable at position varPos) in the Instantiation.

**Parameters**

- **v** (pyAgrum.DiscreteVariable (page 133) or string) – The variable whose value is assigned (or its name)

- **varPos** (*int*) – The index of the variable whose value is assigned in the tuple of variables of the Instantiation
- **newval** (*int or string*) – The index of the value assigned (or its name)

**Returns** The modified instantiation

**Return type** *pyAgrum.Instantiation* (page 146)

**Raises**

- *NotFound* (page 234) – If variable v does not belong to the instantiation.
- *OutOfBounds* – If newval is not a possible value for the variable.

**clear** (*Instantiation self*)

Erase all variables from an Instantiation.

**contains** (*Instantiation self, DiscreteVariable v*)

contains(*Instantiation self*, str *name*) -> bool contains(*Instantiation self*, *DiscreteVariable v*) -> bool

Indicates whether a given variable belongs to the Instantiation.

**Parameters** **v** (*pyAgrum.DiscreteVariable* (page 133)) – The variable for which the test is made.

**Returns** True if the variable is in the Instantiation.

**Return type** bool

**dec** (*Instantiation self*)

Operator –.

**decIn** (*Instantiation self, Instantiation i*)

Operator – for the variables in i.

**Parameters** **i** (*pyAgrum.Instantiation* (page 146)) – The set of variables to decrement in this Instantiation

**decNotVar** (*Instantiation self, DiscreteVariable v*)

Operator – for vars which are not v.

**Parameters** **v** (*pyAgrum.DiscreteVariable* (page 133)) – The variable not to decrement in this Instantiation.

**decOut** (*Instantiation self, Instantiation i*)

Operator – for the variables not in i.

**Parameters** **i** (*pyAgrum.Instantiation* (page 146)) – The set of variables to not decrement in this Instantiation.

**decVar** (*Instantiation self, DiscreteVariable v*)

Operator – for variable v only.

**Parameters** **v** (*pyAgrum.DiscreteVariable* (page 133)) – The variable to decrement in this Instantiation.

**Raises** *NotFound* (page 234) – If variable v does not belong to the Instantiation.

**domainSize** (*Instantiation self*)

**Returns** The product of the variable's domain size in the Instantiation.

**Return type** int

**empty** (*Instantiation self*)

**Returns** True if the instantiation is empty.

**Return type** bool

**end** (*Instantiation self*)

**Returns** True if the Instantiation reached the end.

**Return type** bool

**erase** (*Instantiation self, DiscreteVariable v*)

erase(*Instantiation self, str name*)

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable to be removed from this Instantiation.

**Raises** [NotFound](#) (page 234) – If v does not belong to this Instantiation.

**fromdict** (*Instantiation self, PyObject \* dict*)

Change the values in an instantiation from a dict (variable\_name:value) where value can be a position (int) or a label (string).

If a variable\_name does not occur in the instantiation, nothing is done.

**Warning:** OutOfBounds raised if a value cannot be found.

**hamming** (*Instantiation self*)

**Returns** the hamming distance of this instantiation.

**Return type** int

**inOverflow** (*Instantiation self*)

**Returns** True if the current value of the tuple is correct

**Return type** bool

**inc** (*Instantiation self*)

Operator ++.

**incIn** (*Instantiation self, Instantiation i*)

Operator ++ for the variables in i.

**Parameters** **i** ([pyAgrum.Instantiation](#) (page 146)) – The set of variables to increment in this Instantiation.

**incNotVar** (*Instantiation self, DiscreteVariable v*)

Operator ++ for vars which are not v.

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable not to increment in this Instantiation.

**incOut** (*Instantiation self, Instantiation i*)

Operator ++ for the variables not in i.

**Parameters** **i** ([Instantiation](#) (page 146)) – The set of variable to not increment in this Instantiation.

**incVar** (*Instantiation self, DiscreteVariable v*)

Operator ++ for variable v only.

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable to increment in this Instantiation.

**Raises** [NotFound](#) (page 234) – If variable v does not belong to the Instantiation.

**isMutable** (*Instantiation self*)

**nbrDim** (*Instantiation self*)

**Returns** The number of variables in the Instantiation.

**Return type** int

**pos** (*Instantiation self, DiscreteVariable v*)

**Returns** the position of the variable v.

**Return type** int

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable for which its position is return.

**Raises** [NotFound](#) (page 234) – If v does not belong to the instantiation.

**rend** (*Instantiation self*)

**Returns** True if the Instantiation reached the rend.

**Return type** bool

**reorder** (*Instantiation self*, [pyAgrum.Sequence<pyAgrum.DiscreteVariable \\* > v](#))

reorder(*Instantiation self*, *Instantiation i*)

Reorder vars of this instantiation giving the order in v (or i).

**Parameters**

- **i** ([pyAgrum.Instantiation](#) (page 146)) – The sequence of variables with which to reorder this Instantiation.
- **v** (*list*) – The new order of variables for this Instantiation.

**setFirst** (*Instantiation self*)

Assign the first values to the tuple of the Instantiation.

**setFirstIn** (*Instantiation self*, *Instantiation i*)

Assign the first values in the Instantiation for the variables in i.

**Parameters** **i** ([pyAgrum.Instantiation](#) (page 146)) – The variables to which their first value is assigned in this Instantiation.

**setFirstNotVar** (*Instantiation self*, *DiscreteVariable v*)

Assign the first values to variables different of v.

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable that will not be set to its first value in this Instantiation.

**setFirstOut** (*Instantiation self*, *Instantiation i*)

Assign the first values in the Instantiation for the variables not in i.

**Parameters** **i** ([pyAgrum.Instantiation](#) (page 146)) – The variable that will not be set to their first value in this Instantiation.

**setFirstVar** (*Instantiation self*, *DiscreteVariable v*)

Assign the first value in the Instantiation for var v.

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable that will be set to its first value in this Instantiation.

**setLast** (*Instantiation self*)

Assign the last values in the Instantiation.

**setLastIn** (*Instantiation self*, *Instantiation i*)

Assign the last values in the Instantiation for the variables in i.

**Parameters** **i** ([pyAgrum.Instantiation](#) (page 146)) – The variables to which their last value is assigned in this Instantiation.

**setLastNotVar** (*Instantiation self*, *DiscreteVariable v*)

Assign the last values to variables different of v.

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable that will not be set to its last value in this Instantiation.

**setLastOut** (*Instantiation self*, *Instantiation i*)

Assign the last values in the Instantiation for the variables not in i.

**Parameters** `i` ([pyAgrum.Instantiation](#) (page 146)) – The variables that will not be set to their last value in this Instantiation.

**setLastVar** (*Instantiation self, DiscreteVariable v*)

Assign the last value in the Instantiation for var v.

**Parameters** `v` ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable that will be set to its last value in this Instantiation.

**setMutable** (*Instantiation self*)

**setVals** (*Instantiation self, Instantiation i*)

Assign the values from i in the Instantiation.

**Parameters** `i` ([pyAgrum.Instantiation](#) (page 146)) – An Instantiation in which the new values are searched

**Returns** a reference to the instantiation

**Return type** [pyAgrum.Instantiation](#) (page 146)

**toDict** (*Instantiation self, bool withLabels=False*)

Create a dict (variable\_name:value) from an instantiation

**Parameters** `withLabels` (`boolean`) – The value will be a label (string) if True. It will be a position (int) if False.

**Returns** The dictionary

**Return type** Dict

**unsetEnd** (*Instantiation self*)

Alias for unsetOverflow().

**unsetOverflow** (*Instantiation self*)

Removes the flag overflow.

**val** (*Instantiation self, int i*)

val(Instantiation self, DiscreteVariable var) -> int val(Instantiation self, str name) -> int

**Parameters**

- `i` (`int`) – The index of the variable.
- `var` ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable the value of which we wish to know

**Returns** the current value of the variable.

**Return type** int

**Raises** [NotFound](#) (page 234) – If the element cannot be found.

**variable** (*Instantiation self, int i*)

variable(Instantiation self, str name) -> DiscreteVariable

**Parameters** `i` (`int`) – The index of the variable

**Returns** the variable at position i in the tuple.

**Return type** [pyAgrum.DiscreteVariable](#) (page 133)

**Raises** [NotFound](#) (page 234) – If the element cannot be found.

**variablesSequence** (*Instantiation self*)

**Returns** the sequence of DiscreteVariable of this instantiation.

**Return type** List

## 4.2 Potential

**class** pyAgrum.Potential(\*args)

Class representing a potential.

**Potential() -> Potential** default constructor

**Potential(src) -> Potential**

**Parameters:**

- **src** (*pyAgrum.Potential*) – the Potential to copy

**KL** (*Potential self, Potential p*)

Check the compatibility and compute the Kullback-Leibler divergence between the potential and.

**Parameters** **p** (*pyAgrum.Potential* (page 151)) – the potential from which we want to calculate the divergence.

**Returns** The value of the divergence

**Return type** float

**Raises**

- *gum.InvalidArgument* – If p is not compatible with the potential (dimension, variables)
- *gum.FatalError* – If a zero is found in p or the potential and not in the other.

**abs** (*Potential self*)

Apply abs on every element of the container

**Returns** a reference to the modified potential.

**Return type** *pyAgrum.Potential* (page 151)

**add** (*Potential self, DiscreteVariable v*)

Add a discrete variable to the potential.

**Parameters** **v** (*pyAgrum.DiscreteVariable* (page 133)) – the var to be added

**Raises**

- *DuplicateElement* (page 227) – If the variable is already in this Potential.
- *InvalidArgument* (page 231) – If the variable is empty.

**argmax** (*Potential self*)

**argmin** (*Potential self*)

**contains** (*Potential self, DiscreteVariable v*)

**Parameters** **v** (*pyAgrum.Potential* (page 151)) – a DiscreteVariable.

**Returns** True if the var is in the potential

**Return type** bool

**draw** (*Potential self*)

draw a value using the potential as a probability table.

**Returns** the index of the drawn value

**Return type** int

**empty** (*Potential self*)

**Returns** Returns true if no variable is in the potential.

**Return type** bool

### **entropy** (*Potential self*)

**Returns** the entropy of the potential

**Return type** double

### **extract** (*Potential self, Instantiation inst*)

extract(Potential self, PyObject \* dict) -> Potential

create a new Potential extracted from self given a partial instantiation.

#### **Parameters**

- **inst** (*pyAgrum.instantiation*) – a partial instantiation
- **dict** (*dict*) – a dictionnary containing discrete variables (?)

**Returns** the new Potential

**Return type** *pyAgrum.Potential* (page 151)

### **fill** (*v*)

Deprecated method in pyAgrum>0.12.0. See fillWith instead.

### **fillWith** (*Potential self, Potential src*)

fillWith(Potential self, Potential src, Vector\_string mapSrc) -> Potential fillWith(Potential self, Vector v) -> Potential fillWith(Potential self, double v) -> Potential

Automatically fills the potential with v.

**Parameters v** (number or list or *pyAgrum.Potential* the number of parameters of the Potential) – a value or a list/*pyAgrum.Potential* containing the values to fill the Potential with.

**Warning:** if v is a list, the size of the list must be the if v is a *pyAgrum.Potential*. It must to contain variables with exactly the same names and labels but not necessarily the same variables.

**Returns** a reference to the modified potential

**Return type** *pyAgrum.Potential* (page 151)

**Raises** *gum.SizeError* – If v size’s does not matches the domain size.

### **fillWithFunction** (*s, noise=None*)

Automatically fills the potential as a (quasi) deterministic CPT with the evaluation of the expression s.

The expression s gives a value for the first variable using the names of the last variables. The computed CPT is deterministic unless noise is used to add a ‘probabilistic’ noise around the exact value given by the expression.

## Examples

```
>>> import pyAgrum as gum
>>> bn=gum.fastBN("A[3]->B[3]<-C[3]")
>>> bn.cpt("B").fillWithFunction("(A+C)/2")
```

#### **Parameters**

- **s** (*str*) – an expression using the name of the last variables of the Potential and giving a value to the first variable of the Potential
- **noise** (*list*) – an (odd) list of numerics giving a pattern of ‘probabilistic noise’ around the value.

**Warning:** The expression may have any numerical values, but will be then transformed to the closest correct value for the range of the variable.

**Returns** a reference to the modified potential

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** `gum.InvalidArgument` – If the first variable is Labelized or if the len of the noise is not odd.

**findAll** (*Potential self, double v*)

**get** (*Potential self, Instantiation i*)

**Parameters** `i` ([pyAgrum.Instantiation](#) (page 146)) – an Instantiation

**Returns** the value in the Potential at the position given by the instantiation

**Return type** double

**inverse** (*Potential self*)

**isNonZeroMap** (*Potential self*)

**Returns** a boolean-like potential using the predicate `isNonZero`

**Return type** [pyAgrum.Potential](#) (page 151)

**log2** (*Potential self*)

log2 all the values in the Potential

**Warning:** When the Potential contains 0 or negative values, no exception are raised but `-inf` or `nan` values are assigned.

**loopIn()**

Generator to iterate inside a Potential.

Yield an `gum.Instantiation` that iterates over all the possible values for the `gum.Potential`

## Examples

```
>>> import pyAgrum as gum
>>> bn=gum.fastBN("A[3]->B[3]<-C[3]")
>>> for i in bn.cpt("B").loopIn():
    print(i)
    print(bn.cpt("B").get(i))
    bn.cpt("B").set(i,0.3)
```

**margMaxIn** (*Potential self, PyObject \* varnames*)

Projection using max as operation.

**Parameters** `varnames` (`set`) – the set of vars to keep

**Returns** the projected Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**margMaxOut** (*Potential self, PyObject \* varnames*)

Projection using max as operation.

**Parameters** `varnames` (`set`) – the set of vars to eliminate

**Returns** the projected Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** `gum.InvalidArgument` – If varnames contains only one variable that does not exist in the Potential

**margMinIn** (*Potential self, PyObject \* varnames*)

Projection using min as operation.

**Parameters** `varnames` (*set*) – the set of vars to keep

**Returns** the projected Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**margMinOut** (*Potential self, PyObject \* varnames*)

Projection using min as operation.

**Parameters** `varnames` (*set*) – the set of vars to eliminate

**Returns** the projected Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**Warning:** `InvalidArgument` raised if varnames contains only one variable that does not exist in the Potential

**margProdIn** (*Potential self, PyObject \* varnames*)

Projection using multiplication as operation.

**Parameters** `varnames` (*set*) – the set of vars to keep

**Returns** the projected Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**margProdOut** (*Potential self, PyObject \* varnames*)

Projection using multiplication as operation.

**Parameters** `varnames` (*set*) – the set of vars to eliminate

**Returns** the projected Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** `gum.InvalidArgument` – If varnames contains only one variable that does not exist in the Potential

**margSumIn** (*Potential self, PyObject \* varnames*)

Projection using sum as operation.

**Parameters** `varnames` (*set*) – the set of vars to keep

**Returns** the projected Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**margSumOut** (*Potential self, PyObject \* varnames*)

Projection using sum as operation.

**Parameters** `varnames` (*set*) – the set of vars to eliminate

**Returns** the projected Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** `gum.InvalidArgument` – If varnames contains only one variable that does not exist in the Potential

**max** (*Potential self*)

**Returns** the maximum of all elements in the Potential

**Return type** double

**maxNonOne** (*Potential self*)

**Returns** the maximum of non one elements in the Potential

**Return type** double

**Raises** gum.NotFound – If all value == 1.0

**min** (*Potential self*)

**Returns** the min of all elements in the Potential

**Return type** double

**minNonZero** (*Potential self*)

**Returns** the min of non zero elements in the Potential

**Return type** double

**Raises** gum.NotFound – If all value == 0.0

**nbrDim** (*Potential self*)

**Returns** the number of vars in the multidimensional container.

**Return type** int

**newFactory** (*Potential self*)

Erase the Potential content and create a new empty one.

**Returns** a reference to the new Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**noising** (*Potential self, double alpha*)

**normalize** (*Potential self*)

Normalize the Potential (do nothing if sum is 0)

**Returns** a reference to the normalized Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**normalizeAsCPT** (*Potential self*)

Normalize the Potential as a CPT

**Returns** a reference to the normalized Potential

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** gum.FatalError – If some distribution sums to 0

**populate** (*v*)

Deprecated method in pyAgrum>0.12.0. See fillWith instead.

**pos** (*Potential self, DiscreteVariable v*)

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable for which the index is returned.

**Returns**

**Return type** Returns the index of a variable.

**Raises** gum.NotFound – If v is not in this multidimensional matrix.

**product** (*Potential self*)

**Returns** the product of all elements in the Potential

**Return type** double

**putFirst** (*Potential self, PyObject \* varname*)

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable for which the index should be 0.

**Returns** a reference to the modified potential

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises** `gum.InvalidArgument` – If the var is not in the potential

**random** (*Potential self*)

**randomCPT** (*Potential self*)

**randomDistribution** (*Potential self*)

**remove** (*Potential self, DiscreteVariable var*)

**Parameters** **v** ([pyAgrum.DiscreteVariable](#) (page 133)) – The variable to be removed

**Returns** a reference to the modified potential

**Return type** [pyAgrum.Potential](#) (page 151)

**Warning:** IndexError raised if the var is not in the potential

**reorganize** (*Potential self, vector< pyAgrum.DiscreteVariable \*, allocator< pyAgrum.DiscreteVariable \*>> vars*)  
reorganize(*Potential self, PyObject \* varnames*) -> *Potential*

Create a new Potential with another order.

**Returns** *varnames* – a list of the var names in the new order

**Return type** list

**Returns** a reference to the modified potential

**Return type** [pyAgrum.Potential](#) (page 151)

**scale** (*Potential self, double v*)

Create a new potential multiplied by v.

**Parameters** **v** (*double*) – a multiplier

**Returns**

**Return type** a reference to the modified potential

**set** (*Potential self, Instantiation i, double value*)

Change the value pointed by i

**Parameters**

- **i** ([pyAgrum.Instantiation](#) (page 146)) – The Instantiation to be changed
- **value** (*double*) – The new value of the Instantiation

**sq** (*Potential self*)

Square all the values in the Potential

**sum** (*Potential self*)

**Returns** the sum of all elements in the Potential

**Return type** double

**toarray** ()

**Returns** the potential as an array

**Return type** array

**tolist()**

**Returns** the potential as a list

**Return type** list

**translate**(*Potential self, double v*)

Create a new potential added with v.

**Parameters** **v** (*double*) – The value to be added

**Returns**

**Return type** a reference to the modified potential

**var\_dims**

**Returns** a list containing the dimensions of each variables in the potential

**Return type** list

**var\_names**

**Returns** a list containing the name of each variables in the potential

**Return type** list

**Warning:** Listed in reverse from the variable enumeration order

**variable**(*Potential self, int i*)

variable(Potential self, str name) -> DiscreteVariable

**Parameters** **i** (*int*) – An index of this multidimensional matrix.

**Returns**

**Return type** the varible at the ith index

**Raises** gum.NotFound – If i does not reference a variable in this multidimensional matrix.

**variablesSequence()**

**Returns** a list containing the sequence of variables

**Return type** list



# CHAPTER 5

---

## Module notebook

---

tools for BN analysis in jupyter notebook

```
pyAgrum.lib.notebook.animApproximationScheme (apsc, scale=<ufunc 'log10'>)
    show an animated version of an approximation algorithm
```

### Parameters

- **apsc** – the approximation algorithm
- **scale** – a function to apply to the figure

```
pyAgrum.lib.notebook.configuration()
```

Display the collection of dependance and versions

```
pyAgrum.lib.notebook.getBN (bn, size=None, nodeColor=None, arcWidth=None, arc-
    Color=None, cmap=None, cmapArc=None)
    get a HTML string for a Bayesian network
```

### Parameters

- **bn** – the bayesian network
- **size** – size of the rendered graph
- **nodeColor** – a nodeMap of values (between 0 and 1) to be shown as color of nodes  
(with special colors for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as width of arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmap** – color map to show the colors
- **cmapArc** – color map to show the arc color if distinction is needed

### Returns

```
pyAgrum.lib.notebook.getBNDiff (bn1, bn2, size=None)
```

get a HTML string representation of a graphical diff between the arcs of \_bn1 (reference) with those of \_bn2.

- full black line: the arc is common for both
- full red line: the arc is common but inverted in \_bn2
- dotted black line: the arc is added in \_bn2

- dotted red line: the arc is removed in \_bn2

#### Parameters

- **bn1** ([BayesNet](#) (page 3)) – referent model for the comparison
- **bn2** ([BayesNet](#) (page 3)) – bn compared to the referent model
- **size** – size of the rendered graph

`pyAgrum.lib.notebook.getDot (dotstring, size=None)`  
get a dot string as a HTML string

#### Parameters

- **dotstring** – dot string
- **size** – size of the rendered graph
- **format** – render as “png” or “svg”
- **bg** – color for background

**Returns** the HTML representation of the graph

`pyAgrum.lib.notebook.getGraph (gr, size=None)`  
get a HTML string representation of pydot graph

#### Parameters

- **gr** – pydot graph
- **size** – size of the rendered graph
- **format** – render as “png” or “svg”

**Returns** the HTML representation of the graph as a string

`pyAgrum.lib.notebook.getInference (bn, engine=None, evs=None, targets=None, size=None, nodeColor=None, arcWidth=None, arcColor=None, cmap=None, cmapArc=None, dag=None)`  
get a HTML string for an inference in a notebook

#### Parameters

- **bn** (`gum.BayesNet`) –
- **engine** (`gum.Inference`) – inference algorithm used. If None, LazyPropagation will be used
- **evs** (`dictioinary`) – map of evidence
- **targets** (`set`) – set of targets
- **size** (`string`) – size of the rendered graph
- **nodeColor** – a nodeMap of values (between 0 and 1) to be shown as color of nodes (with special colors for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as width of arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmap** – color map to show the color of nodes and arcs
- **cmapArc** – color map to show the vals of Arcs.

:param dag : only shows nodes that have their id in the dag (and not in the whole BN)

**Returns** the desired representation of the inference

`pyAgrum.lib.notebook.getInferenceEngine (ie, inferenceCaption)`  
display an inference as a BN+ lists of hard/soft evidence and list of targets

**Parameters**

- **ie** (*gum.InferenceEngine*) – inference engine
- **inferenceCaption** (*string*) – title for caption

`pyAgrum.lib.notebook.getInfluenceDiagram(diag, size=None)`

get a HTML string for an influence diagram as a graph

**Parameters**

- **diag** – the influence diagram
- **size** – size of the rendered graph

**Returns** the HTML representation of the influence diagram

`pyAgrum.lib.notebook.getInformation(bn, evs=None, size=None, cmap=<matplotlib.colors.LinearSegmentedColormap object>)`

get a HTML string for a bn annotated with results from inference : entropy and mutual informations

**Parameters**

- **bn** – the BN
- **evs** – map of evidence
- **size** – size of the graph
- **cmap** – colour map used

**Returns** the HTML string

`pyAgrum.lib.notebook.getJunctionTree(bn, withNames=True, size=None)`

get a HTML string for a junction tree (more specifically a join tree)

**Parameters**

- **bn** – the bayesian network
- **withNames** (*boolean*) – display the variable names or the node id in the clique
- **size** – size of the rendered graph

**Returns** the HTML representation of the graph

`pyAgrum.lib.notebook.getPosterior(bn, evs, target)`

shortcut for `getProba(gum.getPosterior(bn,evs,target))`

**Parameters**

- **bn** (*gum.BayesNet*) – the BayesNet
- **evs** (*dict (str->int)*) – map of evidence
- **target** (*str*) – name of target variable

**Returns** the matplotlib graph

`pyAgrum.lib.notebook.getPotential(pot, digits=None, withColors=None, varnames=None)`

return a HTML string of a *gum.Potential* as a HTML table. The first dimension is special (horizontal) due to the representation of conditional probability table

**Parameters**

- **pot** (*gum.Potential*) – the potential to get
- **digits** (*int*) – number of digits to show
- **of strings varnames** (*list*) – the aliases for variables name in the table

**Param** boolean `withColors` : bgcolor for proba cells or not

**Returns** the HTML string

`pyAgrum.lib.notebook.getSideBySide(*args, **kwargs)`  
create an HTML table for args as string (using string, `_repr_html_()` or `str()`)

**Parameters**

- **args** – HMTL fragments as string arg, `arg._repr_html_()` or `str(arg)`
- **captions** – list of strings (captions)

**Returns** a string representing the table

`pyAgrum.lib.notebook.showBN(bn, size=None, nodeColor=None, arcWidth=None, arcColor=None, cmap=None, cmapArc=None)`  
show a Bayesian network

**Parameters**

- **bn** – the bayesian network
- **size** – size of the rendered graph
- **nodeColor** – a nodeMap of values (between 0 and 1) to be shown as color of nodes (with special colors for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as width of arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmap** – color map to show the colors
- **cmapArc** – color map to show the arc color if distinction is needed

**Returns** the graph

`pyAgrum.lib.notebook.showBNDiff(bn1, bn2, size=None)`  
show a graphical diff between the arcs of `_bn1` (reference) with those of `_bn2`.

- full black line: the arc is common for both
- full red line: the arc is common but inverted in `_bn2`
- dotted black line: the arc is added in `_bn2`
- dotted red line: the arc is removed in `_bn2`

**Parameters**

- **bn1** ([BayesNet](#) (page 3)) – referent model for the comparison
- **bn2** ([BayesNet](#) (page 3)) – bn compared to the referent model
- **size** – size of the rendered graph

`pyAgrum.lib.notebook.showDot(dotstring, size=None)`  
show a dot string as a graph

**Parameters**

- **dotstring** – dot string
- **size** – size of the rendered graph

**Returns** the representation of the graph

`pyAgrum.lib.notebook.showGraph(gr, size=None)`  
show a pydot graph in a notebook

**Parameters**

- **gr** – pydot graph
- **size** – size of the rendered graph

**Returns** the representation of the graph

```
pyAgrum.lib.notebook.showInference (bn, engine=None, evs=None, targets=None,
                                    size=None, nodeColor=None, arcWidth=None,
                                    arcColor=None, cmap=None, cmapArc=None,
                                    dag=None)
```

show pydot graph for an inference in a notebook

#### Parameters

- **bn** (*gum.BayesNet*) –
- **engine** (*gum.Inference*) – inference algorithm used. If None, LazyPropagation will be used
- **evs** (*dictioinary*) – map of evidence
- **targets** (*set*) – set of targets
- **size** (*string*) – size of the rendered graph
- **nodeColor** – a nodeMap of values (between 0 and 1) to be shown as color of nodes (with special colors for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as width of arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmap** – color map to show the color of nodes and arcs
- **cmapArc** – color map to show the vals of Arcs.

:param dag : only shows nodes that have their id in the dag (and not in the whole BN)

#### Returns

the desired representation of the inference

```
pyAgrum.lib.notebook.showInfluenceDiagram (diag, size=None)
```

show an influence diagram as a graph

#### Parameters

- **diag** – the influence diagram
- **size** – size of the rendered graph

#### Returns

the representation of the influence diagram

```
pyAgrum.lib.notebook.showInformation (bn, evs=None, size=None,
                                       cmap=<matplotlib.colors.LinearSegmentedColormap
                                         object>)
```

show a bn annotated with results from inference : entropy and mutual informations

#### Parameters

- **bn** – the BN
- **evs** – map of evidence
- **size** – size of the graph
- **cmap** – colour map used

#### Returns

the graph

```
pyAgrum.lib.notebook.showJunctionTree (bn, withNames=True, size=None)
```

Show a junction tree

#### Parameters

- **bn** – the bayesian network
- **withNames** (*boolean*) – display the variable names or the node id in the clique
- **size** – size of the rendered graph

#### Returns

the representation of the graph

```
pyAgrum.lib.notebook.showPosterior (bn, evs, target)
    shortcut for showProba(gum.getPosterior(bn,evs,target))
```

## Parameters

- **bn** – the BayesNet
  - **evidence** – map of evidence
  - **target** – name of target variable

`pyAgrum.lib.notebook.showPotential(pot, digits=None, withColors=None, varNames=None)`

show a gum.Potential as a HTML table. The first dimension is special (horizontal) due to the representation of conditional probability table

## Parameters

- **pot** (*gum.Potential*) – the potential to get
  - **digits** (*int*) – number of digits to show
  - **of strings varnames** (*list*) – the aliases for variables name in the table

**Param** boolean withColors : bgcolor for proba cells or not

**Returns** the display of the potential

```
pyAgrum.lib.notebook.showProba(p, scale=1.0)
```

Show a mono-dim Potential

**Parameters p** – the mono-dim Potential


## Returns

```
pyAgrum.lib.notebook.sideBySide(*args, **kwargs)
```

display side by side args as HMTL fragment (using string, \_repr\_html\_() or str())

## Parameters

- **args** – HMTL fragments as string arg, arg.\_repr\_html\_() or str(arg)
  - **captions** – list of strings (captions)

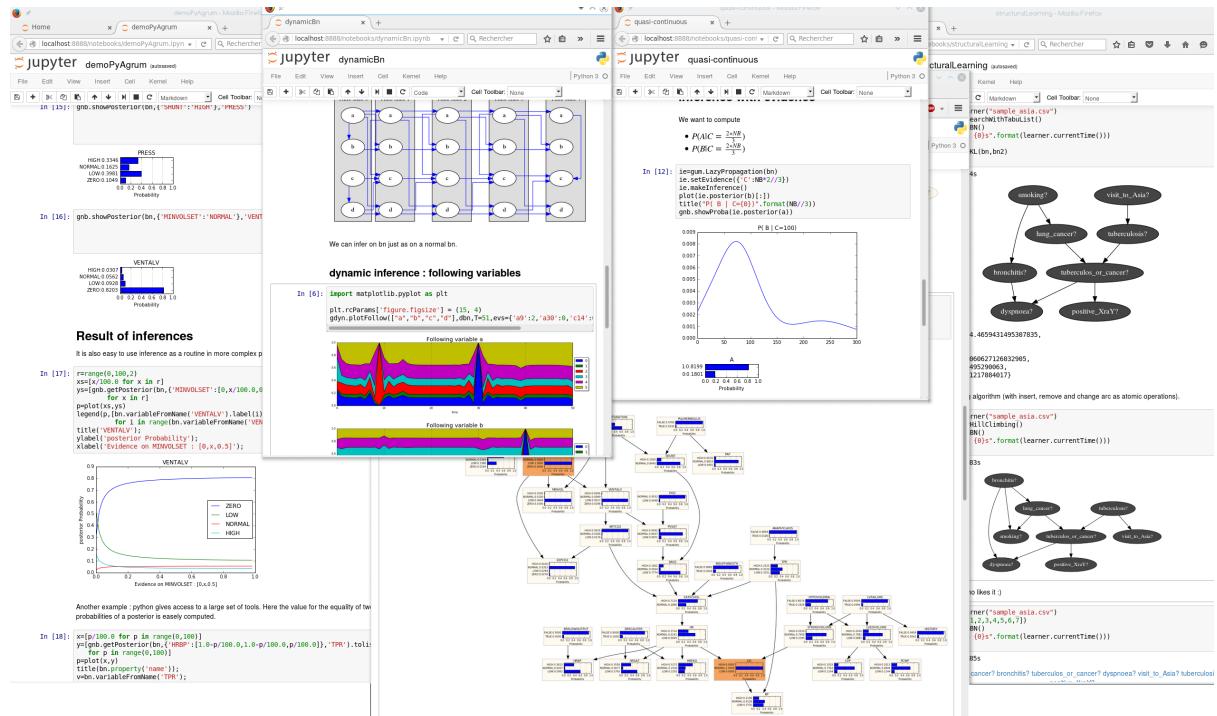

## 5.1 Helpers

`pyAgrum.lib.notebook.configuration()`

Display the collection of dependance and versions

`pyAgrum.lib.notebook.sideBySide(*args, **kwargs)`

display side by side args as HMTL fragment (using string, `_repr_html_()` or `str()`)

### Parameters

- **args** – HMTL fragments as string arg, `arg._repr_html_()` or `str(arg)`
- **captions** – list of strings (captions)

## 5.2 Visualization of Potentials

`pyAgrum.lib.notebook.showProba(p, scale=1.0)`

Show a mono-dim Potential

### Parameters **p** – the mono-dim Potential

### Returns

`pyAgrum.lib.notebook.getPosterior(bn, evs, target)`

shortcut for `getProba(gum.getPosterior(bn, evs, target))`

### Parameters

- **bn** (`gum.BayesNet`) – the BayesNet
- **evs** (`dict(str->int)`) – map of evidence
- **target** (`str`) – name of target variable

### Returns the matplotlib graph

`pyAgrum.lib.notebook.showPosterior(bn, evs, target)`

shortcut for `showProba(gum.getPosterior(bn, evs, target))`

### Parameters

- **bn** – the BayesNet
- **evs** – map of evidence
- **target** – name of target variable

`pyAgrum.lib.notebook.getPotential(pot, digits=None, withColors=None, varnames=None)`

return a HTML string of a gum.Potential as a HTML table. The first dimension is special (horizontal) due to the representation of conditional probability table

### Parameters

- **pot** (`gum.Potential`) – the potential to get
- **digits** (`int`) – number of digits to show
- **of strings varnames** (`list`) – the aliases for variables name in the table

**Param** boolean `withColors` : bgcolor for proba cells or not

**Returns** the HTML string

`pyAgrum.lib.notebook.showPotential(pot, digits=None, withColors=None, varnames=None)`

show a gum.Potential as a HTML table. The first dimension is special (horizontal) due to the representation of conditional probability table

### Parameters

- **pot** (*gum.Potential*) – the potential to get
- **digits** (*int*) – number of digits to show
- **of strings varnames** (*list*) – the aliases for variables name in the table

**Param** boolean withColors : bgcolor for proba cells or not

**Returns** the display of the potential

## 5.3 Visualization of graphs

pyAgrum.lib.notebook.**getDot** (*dotstring*, *size=None*)  
get a dot string as a HTML string

### Parameters

- **dotstring** – dot string
- **size** – size of the rendered graph
- **format** – render as “png” or “svg”
- **bg** – color for background

**Returns** the HTML representation of the graph

pyAgrum.lib.notebook.**showDot** (*dotstring*, *size=None*)  
show a dot string as a graph

### Parameters

- **dotstring** – dot string
- **size** – size of the rendered graph

**Returns** the representation of the graph

pyAgrum.lib.notebook.**getGraph** (*gr*, *size=None*)  
get a HTML string representation of pydot graph

### Parameters

- **gr** – pydot graph
- **size** – size of the rendered graph
- **format** – render as “png” or “svg”

**Returns** the HTML representation of the graph as a string

pyAgrum.lib.notebook.**showGraph** (*gr*, *size=None*)  
show a pydot graph in a notebook

### Parameters

- **gr** – pydot graph
- **size** – size of the rendered graph

**Returns** the representation of the graph

## 5.4 Visualization of graphical models

pyAgrum.lib.notebook.**getBN** (*bn*, *size=None*, *nodeColor=None*, *arcWidth=None*, *arcColor=None*, *cmap=None*, *cmapArc=None*)  
get a HTML string for a Bayesian network

**Parameters**

- **bn** – the bayesian network
- **size** – size of the rendered graph
- **nodeColor** – a nodeMap of values (between 0 and 1) to be shown as color of nodes (with special colors for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as width of arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmap** – color map to show the colors
- **cmapArc** – color map to show the arc color if distinction is needed

**Returns** the graph

```
pyAgrum.lib.notebook.showBN(bn, size=None, nodeColor=None, arcWidth=None, arcColor=None, cmap=None, cmapArc=None)
show a Bayesian network
```

**Parameters**

- **bn** – the bayesian network
- **size** – size of the rendered graph
- **nodeColor** – a nodeMap of values (between 0 and 1) to be shown as color of nodes (with special colors for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as width of arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmap** – color map to show the colors
- **cmapArc** – color map to show the arc color if distinction is needed

**Returns** the graph

```
pyAgrum.lib.notebook.getInference(bn, engine=None, evs=None, targets=None, size=None,
                                   nodeColor=None, arcWidth=None, arcColor=None,
                                   cmap=None, cmapArc=None, dag=None)
get a HTML string for an inference in a notebook
```

**Parameters**

- **bn** (*gum.BayesNet*) –
- **engine** (*gum.Inference*) – inference algorithm used. If None, LazyPropagation will be used
- **evs** (*dictioinary*) – map of evidence
- **targets** (*set*) – set of targets
- **size** (*string*) – size of the rendered graph
- **nodeColor** – a nodeMap of values (between 0 and 1) to be shown as color of nodes (with special colors for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as width of arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmap** – color map to show the color of nodes and arcs
- **cmapArc** – color map to show the vals of Arcs.

:param dag : only shows nodes that have their id in the dag (and not in the whole BN)

**Returns** the desired representation of the inference

```
pyAgrum.lib.notebook.showInference (bn, engine=None, evs=None, targets=None,
                                    size=None, nodeColor=None, arcWidth=None,
                                    arcColor=None, cmap=None, cmapArc=None,
                                    dag=None)
```

show pydot graph for an inference in a notebook

#### Parameters

- **bn** (*gum.BayesNet*) –
- **engine** (*gum.Inference*) – inference algorithm used. If None, LazyPropagation will be used
- **evs** (*dictioinary*) – map of evidence
- **targets** (*set*) – set of targets
- **size** (*string*) – size of the rendered graph
- **nodeColor** – a nodeMap of values (between 0 and 1) to be shown as color of nodes (with special colors for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as width of arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmap** – color map to show the color of nodes and arcs
- **cmapArc** – color map to show the vals of Arcs.

:param dag : only shows nodes that have their id in the dag (and not in the whole BN)

#### Returns

the desired representation of the inference

```
pyAgrum.lib.notebook.getJunctionTree (bn, withNames=True, size=None)
```

get a HTML string for a junction tree (more specifically a join tree)

#### Parameters

- **bn** – the bayesian network
- **withNames** (*boolean*) – display the variable names or the node id in the clique
- **size** – size of the rendered graph

#### Returns

the HTML representation of the graph

```
pyAgrum.lib.notebook.showJunctionTree (bn, withNames=True, size=None)
```

Show a junction tree

#### Parameters

- **bn** – the bayesian network
- **withNames** (*boolean*) – display the variable names or the node id in the clique
- **size** – size of the rendered graph

#### Returns

the representation of the graph

```
pyAgrum.lib.notebook.showInformation (bn, evs=None, size=None,
                                       cmap=<matplotlib.colors.LinearSegmentedColormap
                                         object>)
```

show a bn annotated with results from inference : entropy and mutual informations

#### Parameters

- **bn** – the BN
- **evs** – map of evidence
- **size** – size of the graph
- **cmap** – colour map used

**Returns** the graph

```
pyAgrum.lib.notebook.getInformation(bn,           evs=None,           size=None,
                                      cmap=<matplotlib.colors.LinearSegmentedColormap
                                      object>)
```

get a HTML string for a bn annotated with results from inference : entropy and mutual informations

**Parameters**

- **bn** – the BN
- **evidences** – map of evidence
- **size** – size of the graph
- **cmap** – colour map used

**Returns** the HTML string

```
pyAgrum.lib.notebook.showInfluenceDiagram(diag, size=None)
```

show an influence diagram as a graph

**Parameters**

- **diag** – the influence diagram
- **size** – size of the rendered graph

**Returns** the representation of the influence diagram

```
pyAgrum.lib.notebook.getInfluenceDiagram(diag, size=None)
```

get a HTML string for an influence diagram as a graph

**Parameters**

- **diag** – the influence diagram
- **size** – size of the rendered graph

**Returns** the HTML representation of the influence diagram

## 5.5 Visualization of approximation algorithm

```
pyAgrum.lib.notebook.animApproximationScheme(apsc, scale=<ufunc 'log10'>)
```

show an animated version of an approximation algorithm

**Parameters**

- **apsc** – the approximation algorithm
- **scale** – a function to apply to the figure



# CHAPTER 6

---

## Module bn2graph

---

```
pyAgrum.lib.bn2graph.BN2dot (bn,    size='4',    nodeColor=None,    arcWidth=None,    ar-  
cColor=None,    cmapNode=None,    cmapArc=None,  
showMsg=None)
```

create a pydotplus representation of the BN

### Parameters

- **bn** ([pyAgrum.BayesNet](#) (page 3)) –
- **size** (*string*) – size of the rendered graph
- **nodeColor** – a nodeMap of values (between 0 and 1) to be shown as color of nodes (with special colors for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as width of arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmapNode** – color map to show the vals of Nodes
- **cmapArc** – color map to show the vals of Arcs.
- **showMsg** – a nodeMap of values to be shown as tooltip

### Returns

the desired representation of the BN as a dot graph

```
pyAgrum.lib.bn2graph.BNinference2dot (bn,    size=None,    engine=None,    evs={},    tar-  
gets={},    nodeColor=None,    arcWidth=None,    arc-  
Color=None,    cmapNode=None,    cmapArc=None,  
dag=None)
```

create a pydotplus representation of an inference in a BN

### Parameters

- **bn** ([pyAgrum.BayesNet](#) (page 3)) –
- **size** (*string*) – size of the rendered graph
- **Inference engine** (*pyAgrum*) – inference algorithm used. If None, LazyPropagation will be used
- **evs** (*dict*) – map of evidence
- **targets** (*set*) – set of targets. If targets={} then each node is a target

- **nodeColor** – a nodeMap of values to be shown as color nodes (with special color for 0 and 1)
- **arcWidth** – a arcMap of values to be shown as bold arcs
- **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
- **cmapNode** – color map to show the vals of Nodes
- **cmapArc** – color map to show the vals of Arcs

:param dag : only shows nodes that have their id in the dag (and not in the whole BN)

**Returns** the desired representation of the inference

pyAgrum.lib.bn2graph.**dotize**(aBN, name, format='pdf')

From a bn, creates an image of the BN

#### Parameters

- **bn** (pyAgrum.BayesNet (page 3)) – the bayes net to show
- **name** (*string*) – the filename (without extension) for the image
- **format** (*string*) – format in ['pdf','png','fig','jpg','svg']

pyAgrum.lib.bn2graph.**forDarkTheme**()

change the color for arcs and text in graphs to be more visible in dark theme

pyAgrum.lib.bn2graph.**forLightTheme**()

change the color for arcs and text in graphs to be more visible in light theme

pyAgrum.lib.bn2graph.**getBlackInTheme**()

return the color used for arc and text in graphs

pyAgrum.lib.bn2graph.**pdfize**(aBN, name)

From a bn, creates a pdf of the BN

#### Parameters

- **bn** (pyAgrum.BayesNet (page 3)) – the bayes net to show
- **name** (*string*) – the filename (without extension) for the image

pyAgrum.lib.bn2graph.**pngize**(aBN, name)

From a bn, creates a png of the BN

#### Parameters

- **bn** (pyAgrum.BayesNet (page 3)) – the bayes net to show
- **name** (*string*) – the filename (without extension) for the image

pyAgrum.lib.bn2graph.**proba2histo**(p, scale=1.0)

compute the representation of an histogram for a mono-dim Potential

**Parameters** **p** (pyAgrum.Potential (page 151)) – the mono-dim Potential

**Returns** a matplotlib histogram for a Potential p.

```

1 bn = gum.fastBN("a->b->d; a->c->d->e; f->b")
2 g = BNinference2dot(bn,
3     targets=['f', 'd'],
4     vals={'a': 1,
5           'b': 0.3,
6           'c': 0.3,
7           'd': 0.1,
8           'e': 0.1,
9           'f': 0.3},
10    arcvals={(0, 1): 2,

```

(continues on next page)

(continued from previous page)

```

11     (0, 2): 0.5})
12 g.write("test.png", format='png')

```

## 6.1 Visualization of Potentials

`pyAgrum.lib.bn2graph.proba2histo(p, scale=1.0)`  
 compute the representation of an histogram for a mono-dim Potential

**Parameters** `p` (`pyAgrum.Potential` (page 151)) – the mono-dim Potential

**Returns** a matplotlib histogram for a Potential p.

## 6.2 Visualization of Bayesian Networks

`pyAgrum.lib.bn2graph.BN2dot(bn, size='4', nodeColor=None, arcWidth=None, arcColor=None, cmapNode=None, cmapArc=None, showMsg=None)`  
 create a pydotplus representation of the BN

**Parameters**

- `bn` (`pyAgrum.BayesNet` (page 3)) –
- `size` (*string*) – size of the rendered graph
- `nodeColor` – a nodeMap of values (between 0 and 1) to be shown as color of nodes (with special colors for 0 and 1)
- `arcWidth` – a arcMap of values to be shown as width of arcs
- `arcColor` – a arcMap of values (between 0 and 1) to be shown as color of arcs
- `cmapNode` – color map to show the vals of Nodes
- `cmapArc` – color map to show the vals of Arcs.
- `showMsg` – a nodeMap of values to be shown as tooltip

**Returns** the desired representation of the BN as a dot graph

`pyAgrum.lib.bn2graph.BNinference2dot(bn, size=None, engine=None, evs={}, targets={}, nodeColor=None, arcWidth=None, arcColor=None, cmapNode=None, cmapArc=None, dag=None)`  
 create a pydotplus representation of an inference in a BN

**Parameters**

- `bn` (`pyAgrum.BayesNet` (page 3)) –
- `size` (*string*) – size of the rendered graph
- `Inference engine` (`pyAgrum`) – inference algorithm used. If None, LazyPropagation will be used
- `evs` (*dict*) – map of evidence
- `targets` (*set*) – set of targets. If targets={} then each node is a target

- **nodeColor** – a nodeMap of values to be shown as color nodes (with special color for 0 and 1)
  - **arcWidth** – a arcMap of values to be shown as bold arcs
  - **arcColor** – a arcMap of values (between 0 and 1) to be shown as color of arcs
  - **cmapNode** – color map to show the vals of Nodes
  - **cmapArc** – color map to show the vals of Arcs
- :param dag : only shows nodes that have their id in the dag (and not in the whole BN)

**Returns** the desired representation of the inference

## 6.3 Hi-level functions

`pyAgrum.lib.bn2graph.dotize(aBN, name, format='pdf')`  
From a bn, creates an image of the BN

### Parameters

- **bn** (`pyAgrum.BayesNet` (page 3)) – the bayes net to show
- **name** (*string*) – the filename (without extension) for the image
- **format** (*string*) – format in ['pdf','png','fig','jpg','svg']

`pyAgrum.lib.bn2graph.pngize(aBN, name)`  
From a bn, creates a png of the BN

### Parameters


- **bn** (`pyAgrum.BayesNet` (page 3)) – the bayes net to show
- **name** (*string*) – the filename (without extension) for the image

`pyAgrum.lib.bn2graph.pdfize(aBN, name)`  
From a bn, creates a pdf of the BN

### Parameters

- **bn** (`pyAgrum.BayesNet` (page 3)) – the bayes net to show
- **name** (*string*) – the filename (without extension) for the image

## Module dynamic bayesian network

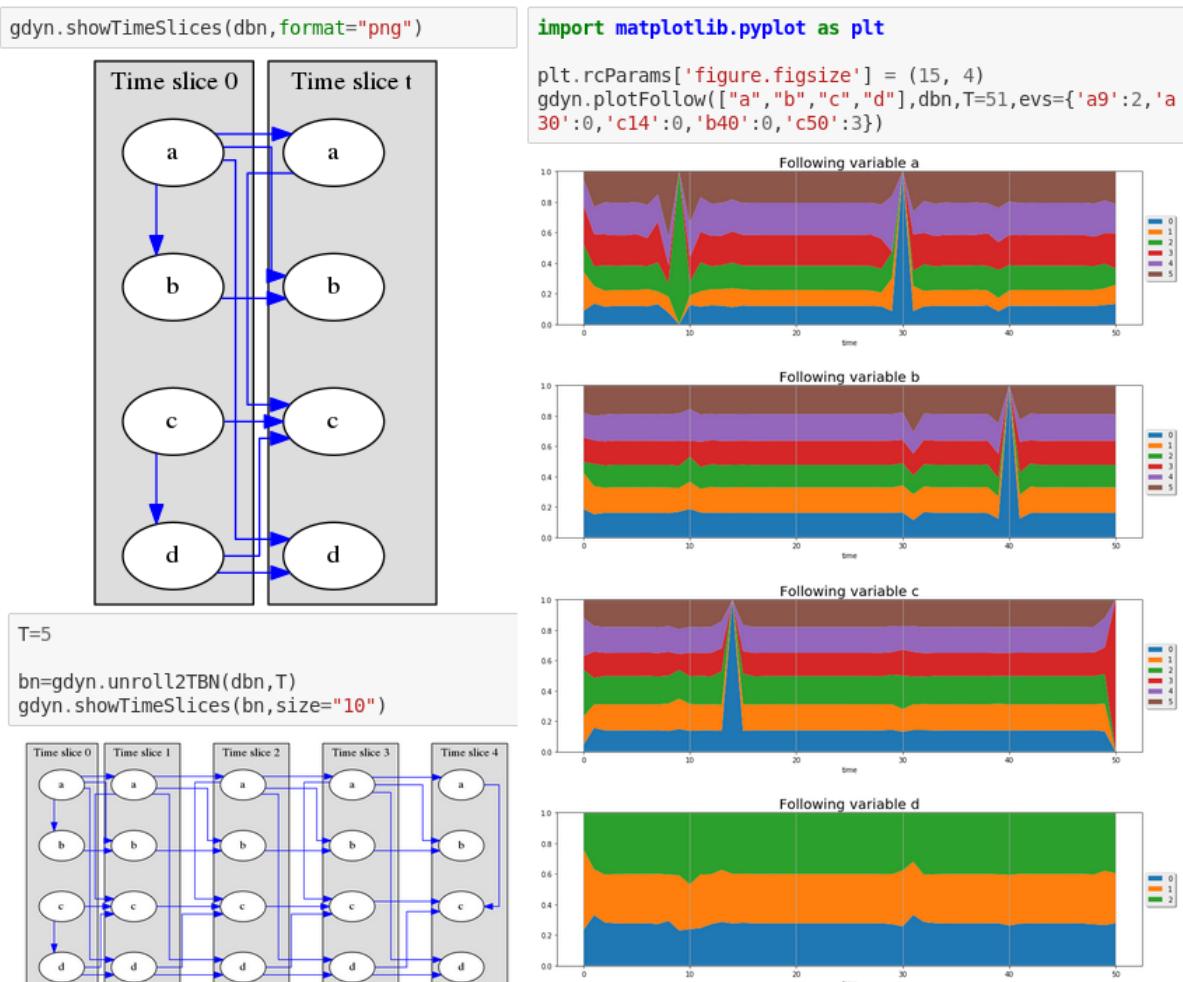

Basic implementation for dynamic Bayesian Networks in pyAgrum

```
pyAgrum.lib.dynamicBN.getTimeSlices(dbn, size=None)
```

Try to correctly represent DBN and 2TBN as an HTML string

### Parameters

- **dbn** – the dynamic BN
- **size** – size of the figure
- **format** – png/svg

pyAgrum.lib.dynamicBN.**getTimeSlicesRange** (*dbn*)

get the range and (name,radical) of each variables

**Parameters** **dbn** – a 2TBN or an unrolled BN

**Returns** all the timeslice of a dbn

e.g. ['0','t'] for a classic 2TBN range(T) for a classic unrolled BN

pyAgrum.lib.dynamicBN.**is2TBN** (*bn*)

pyAgrum.lib.dynamicBN.**plotFollow** (*lovars*, *twoTdbn*, *T*, *evs*)

plots modifications of variables in a 2TDN knowing the size of the time window (T) and the evidence on the sequence.

### Parameters

- **lovars** – list of variables to follow
- **twoTdbn** – the two-timeslice dbn
- **T** – the time range
- **evs** – observations

pyAgrum.lib.dynamicBN.**plotFollowUnrolled** (*lovars*, *dbn*, *T*, *evs*)

plot the dynamic evolution of a list of vars with a dBn

### Parameters

- **lovars** – list of variables to follow
- **dbn** – the unrolled dbn
- **T** – the time range
- **evs** – observations

pyAgrum.lib.dynamicBN.**realNameFrom2TBNname** (*name*, *ts*)

@return dynamic name from static name and timeslice (no check)

pyAgrum.lib.dynamicBN.**showTimeSlices** (*dbn*, *size=None*)

Try to correctly display dBn and 2TBN

### Parameters

- **dbn** – the dynamic BN
- **size** – size of the figure
- **format** – png/svg

pyAgrum.lib.dynamicBN.**unroll2TBN** (*dbn*, *nbr*)

unroll a 2TBN given the nbr of timeslices


### Parameters

- **dbn** – the dBn
- **nbr** – the number of timeslice

**Returns** unrolled BN from a 2TBN and the nbr of timeslices

# CHAPTER 8

## Bayesian network as classifier

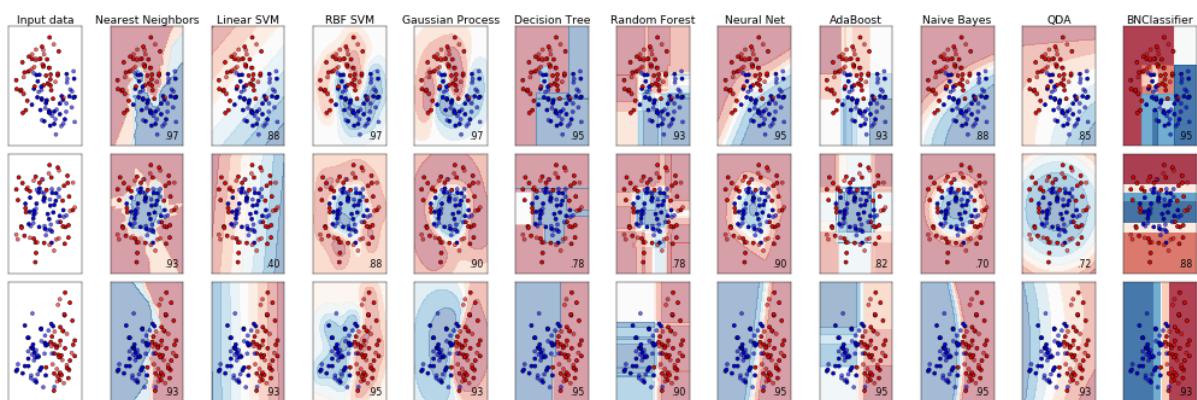



# CHAPTER 9

---

## other pyAgrum.lib modules

---

### 9.1 bn2roc

```
pyAgrum.lib.bn2roc.module_help(exit_value=1, message="")
    defines help viewed if args are not OK on command line, and exit with exit_value
pyAgrum.lib.bn2roc.showROC(bn, csv_name, variable, label, visible=True, show_fig=False,
                           with_labels=True)
    Compute the ROC curve and save the result in the folder of the csv file.
```

#### Parameters

- **bn** ([pyAgrum.BayesNet](#) (page 3)) – a bayesian network
- **csv\_name** (*str*) – a csv filename
- **target** (*str*) – the target
- **label** (*str*) – the target label
- **visible** (*bool*) – indicates if the resulting curve must be printed

### 9.2 bn2csv

Samples generation w.r.t to a probability distribution represented by a Bayesian network.

```
class pyAgrum.lib.bn2csv.CSVGenerator
Bases: object
```

Class for samples generation w.r.t to a probability distribution represented by a Bayesian network.

```
caching_probas(bn, node_id, n, par)
```

#### Parameters

- **bn** ([pyAgrum.BayesNet](#) (page 3)) – a Bayesian network
- **node\_id** (*int*) – a node id
- **n** (*int*) – a node id
- **par** (*list*) – the node's parents

**Returns** the node's probabilities

**Return type** list

**cachingnameAndParents** (*bn, n*)

Compute a list of parents for node n in BN bn.

**Parameters**

- **bn** ([pyAgrum.BayesNet](#) (page 3)) – a Bayesian network
- **n** – (int) a node id
- **n** – (str) a node name

**Returns** a couple of name of n and list of parents names

**Return type** tuple

**static draw** (*tab*)

draw a value using tab as probability table.

**Parameters** **tab** (*list*) – a probability table

**Returns** the couple (i,proba)

**Return type** tuple

**static nameAndParents** (*bn, n*)

Compute a list of parents for node n in BN bn.

**Parameters**

- **bn** ([pyAgrum.BayesNet](#) (page 3)) – a Bayesian network
- **n** – (int) a node id
- **n** – (str) a node name

**Returns** a couple of name of n and list of parents names

**Return type** tuple

**Raises** `gum.IndexError` – If the node is not in the Bayesian network

**newSample** (*bn, seq*)

Generate a sample w.r.t to the bn using the variable sequence seq (topological order)

**Parameters**

- **bn** ([pyAgrum.BayesNet](#) (page 3)) – a Bayesian network
- **seq** (*list*) – a variable sequence

**Returns** the couple (sample,log2-likelihood)

**Return type** tuple

**proceed** (*name\_in, name\_out, n, visible, with\_labels*)

From the file name\_in (BN file), generate n samples and save them in name\_out

**Parameters**

- **name\_in** (*str*) – a file name
- **name\_out** (*str*) – the output file
- **n** (*int*) – the number of samples
- **visible** (*bool*) – indicate if a progress bar should be displayed
- **with\_labels** (*bool*) – indicate if values should be labelled or not

**Returns** the log2-likelihood of the n samples database

**Return type** double

---

```
pyAgrum.lib.bn2csv.generateCSV(name_in, name_out, n, visible=False, with_labels=True)
```

From the file name\_in (BN file), generate n samples and save them in name\_out

#### Parameters

- **name\_in** (*str*) – a file name
- **name\_out** (*str*) – the output file
- **n** (*int*) – the number of samples
- **visible** (*bool*) – indicate if a progress bar should be displayed
- **with\_labels** (*bool*) – indicate if values should be labelled or not

**Returns** the log2-likelihood of the n samples database

**Return type** double

```
pyAgrum.lib.bn2csv.module_help(exit_value=1)
```

defines help viewed if args are not OK on command line, and exit with exit\_value

## 9.3 bn2scores

```
pyAgrum.lib.bn2scores.checkCompatibility(bn, fields, csv_name)
```

check if variables of the bn are in the fields

if not : return None if compatibility : return a list of position for variables in fields

```
pyAgrum.lib.bn2scores.computeScores(bn_name, csv_name, visible=False, transforme_label=None)
```

```
pyAgrum.lib.bn2scores.getNumLabel(inst, i, label, transforme_label)
```

```
pyAgrum.lib.bn2scores.lines_count(filename)
```

count lines in a file

```
pyAgrum.lib.bn2scores.module_help(exit_value=1)
```

defines help viewed if args are not OK on command line, and exit with exit\_value

```
pyAgrum.lib.bn2scores.stringify(s)
```

## 9.4 bn\_vs\_bn

```
class pyAgrum.lib.bn_vs_bn.GraphicalBNComparator(name1, name2, delta=1e-06)
```

Bases: object

BNGraphicalComparator allows to compare in multiple way 2 BNs... The smallest assumption is that the names of the variables are the same in the 2 BNs. But some comparisons will have also to check the type and domainSize of the variables. The bns have not exactly the same role : \_bn1 is rather the referent model for the comparison whereas \_bn2 is the compared one to the referent model

#### Parameters

- **name1** (*str* or `pyAgrum.BayesNet` (page 3)) – a BN or a filename for reference
- **name2** (*str* or `pyAgrum.BayesNet` (page 3)) – another BN or another filename for comparison

**dotDiff()**

Return a pydotplus graph that compares the arcs of \_bn1 (reference) with those of self.\_bn2. full black line: the arc is common for both full red line: the arc is common but inverted in \_bn2 dotted black line: the arc is added in \_bn2 dotted red line: the arc is removed in \_bn2

**Warning:** if pydotplus is not installed, this function just returns None

**Returns** the result dot graph or None if pydotplus can not be imported

**Return type** pydotplus.Dot

**equivalentBNs ()**

Check if the 2 BNs are equivalent :

- same variables
- same graphical structure
- same parameters

**Returns** “OK” if bn are the same, a description of the error otherwise

**Return type** str

**hamming ()**

Compute hamming and structural hamming distance Hamming distance is the difference of edges comparing the 2 skeletons, and Structural Hamming difference is the difference comparing the cpdags, including the arcs' orientation.

**Returns** A dictionnary containing ‘hamming’, ‘structural hamming’

**Return type** dict[double,double]

**scores ()**

Compute Precision, Recall, F-score for self.\_bn2 compared to self.\_bn1

precision and recall are computed considering BN1 as the reference

Fscore is  $2 * (\text{recall} * \text{precision}) / (\text{recall} + \text{precision})$  and is the weighted average of Precision and Recall.

dist2opt=square root of  $(1 - \text{precision})^2 + (1 - \text{recall})^2$  and represents the euclidian distance to the ideal point (precision=1, recall=1)

**Returns** A dictionnary containing ‘precision’, ‘recall’, ‘fscore’, ‘dist2opt’ and so on.

**Return type** dict[str,double]

pyAgrum.lib.bn\_vs\_bn.**module\_help** (*exit\_value=1*)

defines help viewed if args are not OK on command line, and exit with *exit\_value*

## 9.5 pretty\_print

pyAgrum.lib.pretty\_print.**bn2txt** (*aBN*)

Representation of all CPTs of a gum.BayesNet

**Parameters** *aBN* – the bayes net or the name of the file

**Returns**

pyAgrum.lib.pretty\_print.**cpt2txt** (*cpt, digits=4*)

string representation of a gum.Potential

**Parameters** *cpt* – the Potential to represent

**Returns** the string representation


pyAgrum.lib.pretty\_print.**max\_length** (*v*)

pyAgrum.lib.pretty\_print.**module\_help** (*exit\_value=1*)

defines help viewed if args are not OK on command line, and exit with *exit\_value*

# CHAPTER 10

## pyAgrum.causal documentation

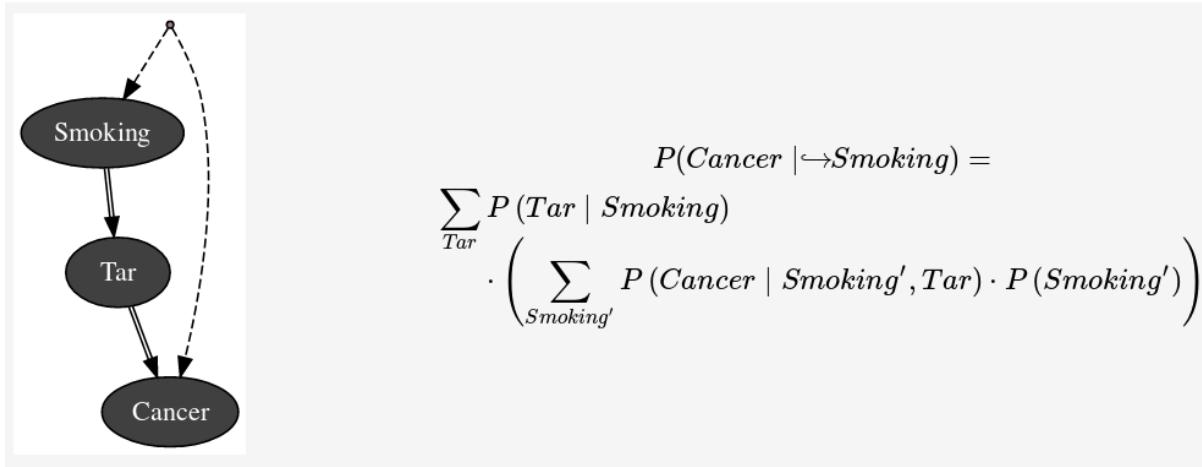

Causality in pyAgrum mainly consists in the ability to build a causal model, i.e. a (observational) Bayesian network and a set of latent variables and their relation with observation variables and in the ability to compute using do-calculus the causal impact in such a model.

Causality is a set of pure python3 scripts based on pyAgrum's tools.

### 10.1 Causal Model

```
class pyAgrum.causal.CausalModel(bn: pyAgrum.BayesNet, latentVarsDescriptor: Optional[List[Tuple[str, Tuple[str, str]]]] = None, keepArcs: bool = False)
```

From an observational BNs and the description of latent variables, this class represent a complet causal model obtained by adding the latent variables specified in `latentVarsDescriptor` to the Bayesian network `bn`.

#### Parameters

- `bn` – a observational bayesian network
- `latentVarsDescriptor` – list of couples (<latent variable name>, <list of affected variables' ids>).

- **keepArcs** – By default, the arcs between variables affected by a common latent variable will be removed but this can be avoided by setting `keepArcs` to `True`

**causalBN()** → `pyAgrum.BayesNet`

**Returns** the causal Bayesian network

**Warning** do not infer any computations in this model. It is strictly a structural model

**children** (*x*: `Union[int, str]`) → `Set[int]`

**Parameters** *x* – the node

**Returns**

**idFromName** (*name*: `str`) → `int`

**Parameters** *name* – the name of the variable

**Returns** the id of the variable

**latentVariablesIds()** → `Set[int]`

**Returns** the set of ids of latent variables in the causal model

**names()** → `Dict[int, str]`

**Returns** the map `NodeId,Name`

**observationalBN()** → `pyAgrum.BayesNet`

**Returns** the observational Bayesian network

**parents** (*x*: `Union[int, str]`) → `Set[int]`

From a `NodeId`, returns its parent (as a set of `NodeId`)

**Parameters** *x* – the node

**Returns**

## 10.2 Causal Formula

*CausalFormula* is the class that represents a causal query in a causal model. Mainly it consists in

- a reference to the `CausalModel`
- Three sets of variables name that represent the 3 sets of variable in the query  $P(\text{set1} \mid \text{doing}(\text{set2}), \text{knowing}(\text{set3}))$ .
- the AST for compute the query.

**class** `pyAgrum.causal.CausalFormula` (*cm*: `'CausalModel'`, *root*: `ASTtree`, *on*: `Union(str, NameSet)`, *doing*: `Union(str, NameSet)`, *knowing*: `Optional[NameSet] = None`)

Represents a causal query in a causal model. The query is encoded as an `CausalFormula` that can be evaluated in the causal model :  $\$P(\text{on}|\text{knowing}, \text{overhook}(\text{doing}))\$$

**Parameters**

- **cm** – the causal model
- **root** – the syntax tree as the root `ASTtree`
- **on** – the variable or the set of variables of interest
- **doing** – the intervention variables
- **knowing** – the observation variables

**cm**

return: the causal model

**copy ()** → CausalFormula

Copy theAST. Note that the causal model is just referenced. The tree is copied.

**Returns** the new CausalFormula

**eval ()** → pyAgrum.Potential

Compute the Potential from the CausalFormula over vars using cond as value for others variables

**Parameters** bn – the BN where to infer

**Returns**

**latexQuery (values: Optional[Dict[str, str]] = None)** → str

Returns a string representing the query compiled by this Formula. If values, the query is annotated with the values in the dictionary.

**Parameters** values – the values to add in the query representation

**Returns** the string representing the causal query for this CausalFormula

**root**

return: ASTtree root of the CausalFormula tree

**toLatex ()** → str

**Returns** a LaTeX representation of the CausalFormula

## 10.3 Causal Inference

Obtaining and evaluating a CausalFormula is done using one these functions :

```
pyAgrum.causal.causalImpact(cm:      pyAgrum.causal._CausalModel.CausalModel,    on:
                                Union[str, Set[str]], doing: Union[str, Set[str]], knowing: Optional[Set[str]] = None, values: Optional[Dict[str, int]] = None)
                                → Tuple[pyAgrum.causal._CausalFormula.CausalFormula,
                                       pyAgrum.Potential, str]
```

Determines the causal impact of interventions.

Determines the causal impact of the interventions specified in doing on the single or list of variables on knowing the states of the variables in knowing (optional). These last parameters is dictionary <variable name>:<value>. The causal impact is determined in the causal DAG cm. This function returns a triplet with a latex format formula used to compute the causal impact, a potential representing the probability distribution of on given the interventions and observations as parameters, and an explanation of the method allowing the identification. If there is no impact, the joint probability of on is simply returned. If the impact is not identifiable the formula and the adjustment will be None but an explanation is still given.

**Parameters**

- cm – causal model
- on – variable name or variable names set
- doing – variable name or variable names set
- knowing – variable names set
- values – Dictionary

**Returns** the CausalFormula, the computation, the explanation

```
pyAgrum.causal.doCalculusWithObservation(cm: pyAgrum.causal._CausalModel.CausalModel,
                                            on: str, doing: Set[str], knowing:
                                            Optional[Set[str]] = None) → pyA-
                                            grum.causal._CausalFormula.CausalFormula
```

Compute the CausalFormula for an impact analysis given the causal model, the observed variables and the variable on which there will be intervention.

### Parameters

- **on** – the variables of interest
- **cm** – the causal model
- **doing** – the interventions
- **knowing** – the observations

**Returns** the CausalFormula for computing this causal impact

```
pyAgrum.causal.identifyingIntervention(cm: pyAgrum.causal._CausalModel.CausalModel,
                                         Y: Set[str], X: Set[str], P: pyAgrum.causal._doAST.ASTtree = None) →
                                         pyAgrum.causal._doAST.ASTtree
```

Following Shpitser, Ilya and Judea Pearl. ‘Identification of Conditional Interventional Distributions.’ UAI2006 and ‘Complete Identification Methods for the Causal Hierarchy’ JMLR 2008

### Parameters


- **cm** – the causal model
- **Y** – The variables of interest (named following the paper)
- **X** – The variable of intervention (named following the paper)
- **P** – The ASTtree representing the calculus in construction

**Returns** the ASTtree representing the calculus

## 10.4 Abstract Syntax Tree for Do-Calculus

The pyCausal package compute every causal query into an Abstract Syntax Tree (CausalFormula) that represents the exact computations to be done in order to answer to the probabilistic causal query.

The different types of node in an CausalFormula are presented below and are organized as a hierarchy of classes from `pyAgrum.causal.ASTtree` (page 186).

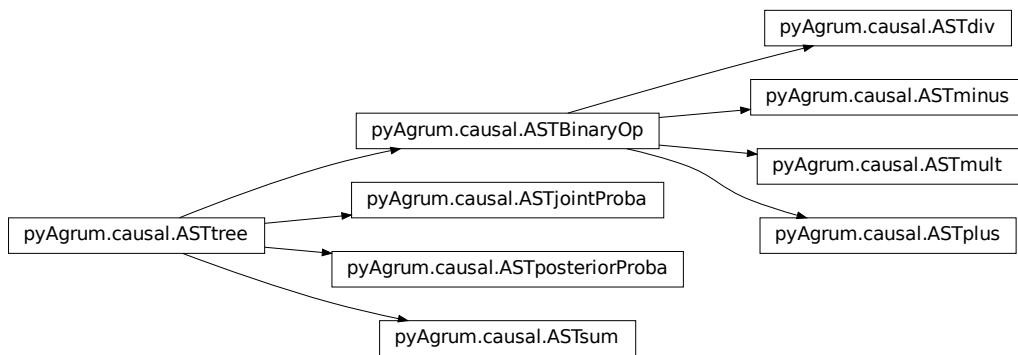

### 10.4.1 Internal node structure

```
class pyAgrum.causal.ASTtree(type: str, verbose=False)
```

Represents a generic node for the CausalFormula. The type of the node will be registered in a string.

**Parameters** **type** – the type of the node (will be specified in concrete children classes).

**copy** () → pyAgrum.causal.\_doAST.ASTtree  
Copy an CausalFormula tree

**Returns** the new causal tree

**toLatex** (nameOccur: Optional[Dict[str, int]] = None) → str  
Create a LaTeX representation of a ASTtree

**Returns** the LaTeX string

**type**  
return: the type of the node

**class** pyAgrum.causal.**ASTBinaryOp** (type: str, op1: pyAgrum.causal.\_doAST.ASTtree, op2: pyAgrum.causal.\_doAST.ASTtree)

Represents a generic binary node for the CausalFormula. The op1 and op2 are the two operands of the class.

#### Parameters

- **type** – the type of the node (will be specified in concrete children classes)
- **op1** – left operand
- **op2** – right operand

**copy** () → pyAgrum.causal.\_doAST.ASTtree  
Copy an CausalFormula tree

**Returns** the new causal tree

**op1**  
return: the left operand

**op2**  
return: the right operand

**toLatex** (nameOccur: Optional[Dict[str, int]] = None) → str  
Create a LaTeX representation of a ASTtree

**Returns** the LaTeX string

**type**  
return: the type of the node

### 10.4.2 Basic Binary Operations

**class** pyAgrum.causal.**ASTplus** (op1: pyAgrum.causal.\_doAST.ASTtree, op2: pyAgrum.causal.\_doAST.ASTtree)

Represents the sum of 2 causal.ASTtree

#### Parameters

- **op1** – first operand
- **op2** – second operand

**copy** () → pyAgrum.causal.\_doAST.ASTtree  
Copy an CausalFormula tree

**Returns** the new CausalFormula tree

**op1**  
return: the left operand

**op2**  
return: the right operand

**toLatex** (nameOccur: Optional[Dict[str, int]] = None) → str  
Create a LaTeX representation of a ASTtree

**Returns** the LaTeX string

**type**

return: the type of the node

**class** pyAgrum.causal.**ASTminus** (*op1*: pyAgrum.causal.\_doAST.ASTtree, *op2*: pyAgrum.causal.\_doAST.ASTtree)

Represents the subtraction of 2 causal.ASTtree

**Parameters**

- **op1** – first operand
- **op2** – second operand

**copy** () → pyAgrum.causal.\_doAST.ASTtree

Copy an CausalFormula tree

**Returns** the new CausalFormula tree

**op1**

return: the left operand

**op2**

return: the right operand

**toLatex** (*nameOccur*: Optional[Dict[str, int]] = None) → str

Create a LaTeX representation of a ASTtree

**Returns** the LaTeX string

**type**

return: the type of the node

**class** pyAgrum.causal.**ASTdiv** (*op1*: pyAgrum.causal.\_doAST.ASTtree, *op2*: pyAgrum.causal.\_doAST.ASTtree)

Represents the division of 2 causal.ASTtree

**Parameters**

- **op1** – first operand
- **op2** – second operand

**copy** () → pyAgrum.causal.\_doAST.ASTtree

Copy an CausalFormula tree

**Returns** the new CausalFormula tree

**op1**

return: the left operand

**op2**

return: the right operand

**toLatex** (*nameOccur*: Optional[Dict[str, int]] = None) → str

Create a LaTeX representation of a ASTtree

**Returns** the LaTeX string

**type**

return: the type of the node

**class** pyAgrum.causal.**ASTmult** (*op1*: pyAgrum.causal.\_doAST.ASTtree, *op2*: pyAgrum.causal.\_doAST.ASTtree)

Represents the multiplication of 2 causal.ASTtree

**Parameters**

- **op1** – first operand
- **op2** – second operand

---

**copy** () → pyAgrum.causal.\_doAST.ASTtree  
Copy an CausalFormula tree

**Returns** the new CausalFormula tree

**op1**  
return: the left operand

**op2**  
return: the right operand

**toLatex** (*nameOccur*: Optional[Dict[str, int]] = None) → str  
Create a LaTeX representation of a ASTtree

**Returns** the LaTeX string

**type**  
return: the type of the node

### 10.4.3 Complex operations

**class** pyAgrum.causal.**ASTsum** (*var*: List[str], *term*: pyAgrum.causal.\_doAST.ASTtree)  
Represents a sum over a variable of a causal.ASTtree.

**Parameters**

- **var** – name of the variable
- **term** – the tree to be evaluated

**copy** () → pyAgrum.causal.\_doAST.ASTtree  
Copy an CausalFormula tree

**Returns** the new CausalFormula tree

**eval** (*contextual\_bn*: pyAgrum.BayesNet) → pyAgrum.Potential  
Evaluation of the sum

**Parameters** **contextual\_bn** – BN where to infer

**Returns** the value of the sum

**toLatex** (*nameOccur*: Optional[Dict[str, int]] = None) → str  
Create a LaTeX representation of a ASTtree

**Returns** the LaTeX string

**type**

return: the type of the node

**class** pyAgrum.causal.**ASTjointProba** (*varNames*: Set[str])

Represent a joint probability in the base observational part of the causal.CausalModel

**Parameters** **varNames** – a set of variable names

**copy** () → pyAgrum.causal.\_doAST.ASTtree  
Copy an CausalFormula tree

**Returns** the new CausalFormula tree

**toLatex** (*nameOccur*: Optional[Dict[str, int]] = None) → str  
Create a LaTeX representation of a ASTtree

**Returns** the LaTeX string

**type**

return: the type of the node

**varNames**

return: the set of names of var

```
class pyAgrum.causal.ASTposteriorProba(bn: pyAgrum.BayesNet, vars: Set[str], knw: Set[str])
```

Represent a conditional probability  $P_{bn}(vars|knw)$  that can be computed by an inference in a BN.

#### Parameters

- **bn** – the pyAgrum:pyAgrum.BayesNet
- **vars** – a set of variable names (in the BN)
- **knw** – a set of variable names (in the BN)

**bn**

return: bn in  $P_{bn}(vars|knw)$

**copy**() → pyAgrum.causal.\_doAST.ASTtree

Copy an CausalFormula tree

**Returns** the new CausalFormula tree

**knw**

return: knw in  $P_{bn}(vars|knw)$

**toLatex**(*nameOccur*: Optional[Dict[str, int]] = None) → str

Create a LaTeX representation of a ASTtree

**Returns** the LaTeX string

**type**

return: the type of the node

**vars**

return: vars in  $P_{bn}(vars|knw)$

## 10.5 Exceptions

```
class pyAgrum.causal.HedgeException(msg: str, observables: Set[str], gs)
```

Represents an hedge exception for a causal query

#### Parameters

- **msg** – str
- **observables** – NameSet
- **gs** – ???

**with\_traceback**()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

```
class pyAgrum.causal.UnidentifiableException(msg)
```

Represents an unidentifiability for a causal query

**with\_traceback**()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

## 10.6 Notebook's tools for causality

This file defines some helpers for handling causal concepts in notebooks

```
pyAgrum.causal.notebook.getCausalImpact (model: pyA-
                                         grum.causal._CausalModel.CausalModel,
                                         on: Union[str, Set[str]], doing: Union[str,
                                         Set[str]], knowing: Optional[Set[str]] = None,
                                         values: Optional[Dict[str, int]] = None) →
                                         Tuple[str, pyAgrum.Potential, str]
return a HTML representing of the three values defining a causal impact : formula, value, explanation
:param model: the causal model :param on: the impacted variable(s) :param doing: the variable(s) of
intervention :param knowing: the variable(s) of evidence :param values : values for certain variables

Returns a triplet (CausalFormula, gum.Potential, explanation)

pyAgrum.causal.notebook.getCausalModel (cm: pyAgrum.causal._CausalModel.CausalModel,
                                         size=None) → str
return a HTML representing the causal model :param cm: the causal model :param size: passd :param vals:
:return:

pyAgrum.causal.notebook.showCausalImpact (model: pyA-
                                         grum.causal._CausalModel.CausalModel,
                                         on: Union[str, Set[str]], doing: Union[str,
                                         Set[str]], knowing: Optional[Set[str]] =
                                         None, values: Optional[Dict[str, int]] =
                                         None)
display a HTML representing of the three values defining a causal impact : formula, value, explanation
:param model: the causal model :param on: the impacted variable(s) :param doing: the variable(s) of
intervention :param knowing: the variable(s) of evidence :param values : values for certain variables

pyAgrum.causal.notebook.showCausalModel (cm: pyAgrum.causal._CausalModel.CausalModel,
                                         size: str = '4')
Shows a graphviz svg representation of the causal DAG ◊
```



# CHAPTER 11

---

## Probabilistic Relational Models

---

For now, pyAgrum only allows to explore Probabilistic Relational Models written with o3prm syntax.

```
class pyAgrum.PRMexplorer
    PRMexplorer helps navigate through probabilistic relational models.

    PRMexplorer() -> PRMexplorer default constructor

    aggType
        a(9).str
        min/max/count/exists/forall/or/and/amplitude/median

        Type aggType

    classAggregates (PRMexplorer self, str class_name)
        Parameters class_name (str) – a class name
        Returns the list of aggregates in the class
        Return type list
        Raises gum.IndexError – If the class is not in the PRM

    classAttributes (PRMexplorer self, str class_name)
        Parameters class_name (str) – a class name
        Returns the list of attributes
        Return type list
        Raises gum.IndexError – If the class is not in the PRM

    classDag (PRMexplorer self, str class_name)
        Parameters class_name (str) – a class name
        Returns a description of the DAG
        Return type tuple
        Raises gum.IndexError – If the class is not in the PRM

    classImplements (PRMexplorer self, str class_name)
        Parameters class_name (str) – a class name
```

**Returns** the list of interfaces implemented by the class

**Return type** list

**classParameters** (*PRMexplorer self, str class\_name*)

**Parameters** **class\_name** (*str*) – a class name

**Returns** the list of parameters

**Return type** list

**Raises** `gum.IndexError` – If the class is not in the PRM

**classReferences** (*PRMexplorer self, str class\_name*)

**Parameters** **class\_name** (*str*) – a class name

**Returns** the list of references

**Return type** list

**Raises** `gum.IndexError` – If the class is not in the PRM

**classSlotChains** (*PRMexplorer self, str class\_name*)

**Parameters** **class\_name** (*str*) – a class name

**Returns** the list of class slot chains

**Return type** list

**Raises** `gum.IndexError` – if the class is not in the PRM

**classes** (*PRMexplorer self*)

**Returns** the list of classes

**Return type** list

**cpf** (*PRMexplorer self, str class\_name, str attribute*)

**Parameters**

- **class\_name** (*str*) – a class name
- **attribute** (*str*) – an attribute

**Returns** the potential of the attribute

**Return type** [pyAgrum.Potential](#) (page 151)

**Raises**

- `gum.OperationNotAllowed` – If the class element doesn't have any `pyAgrum.Potential` (like a `pyAgrum.PRMReferenceSlot`).
- `gum.IndexError` – If the class is not in the PRM
- `gum.IndexError` – If the attribute in parameters does not exist

**getDirectSubClass** (*PRMexplorer self, str class\_name*)

**Parameters** **class\_name** (*str*) – a class name

**Returns** the list of direct subclasses

**Return type** list

**Raises** `gum.IndexError` – If the class is not in the PRM

**getDirectSubInterfaces** (*PRMexplorer self, str interface\_name*)

**Parameters** **interface\_name** (*str*) – an interface name

**Returns** the list of direct subinterfaces

**Return type** list

**Raises** `gum.IndexError` – If the interface is not in the PRM

**getDirectSubTypes** (`PRMexplorer self, str type_name`)

**Parameters** `type_name` (`str`) – a type name

**Returns** the list of direct subtypes

**Return type** list

**Raises** `gum.IndexError` – If the type is not in the PRM

**getImplementations** (`PRMexplorer self, str interface_name`)

**Parameters** `interface_name` (`str`) – an interface name

**Returns** the list of classes implementing the interface

**Return type** str

**Raises** `gum.IndexError` – If the interface is not in the PRM

**getLabelMap** (`PRMexplorer self, str type_name`)

**Parameters** `type_name` (`str`) – a type name

**Returns** a dict containing pairs of label and their values

**Return type** dict

**Raises** `gum.IndexError` – If the type is not in the PRM

**getLabels** (`PRMexplorer self, str type_name`)

**Parameters** `type_name` (`str`) – a type name

**Returns** the list of type labels

**Return type** list

**Raises** `gum.IndexError` – If the type is not in the PRM

**getSuperClass** (`PRMexplorer self, str class_name`)

**Parameters** `class_name` (`str`) – a class name

**Returns** the class extended by `class_name`

**Return type** str

**Raises** `gum.IndexError` – If the class is not in the PRM

**getSuperInterface** (`PRMexplorer self, str interface_name`)

**Parameters** `interface_name` (`str`) – an interface name

**Returns** the interface extended by `interface_name`

**Return type** str

**Raises** `gum.IndexError` – If the interface is not in the PRM

**getSuperType** (`PRMexplorer self, str type_name`)

**Parameters** `type_name` (`str`) – a type name

**Returns** the type extended by `type_name`

**Return type** str

**Raises** `gum.IndexError` – If the type is not in the PRM

**getAlltheSystems** (`PRMexplorer self`)

**Returns** the list of all the systems and their components

**Return type** list

**interAttributes** (*PRMexplorer self*, *str interface\_name*, *bool allAttributes=False*)

**Parameters**

- **interface\_name** (*str*) – an interface
- **allAttributes** (*bool*) – True if supertypes of a custom type should be indicated

**Returns** the list of (<type>,<attribute\_name>) for the given interface

**Return type** list

**Raises** `gum.IndexError` – If the type is not in the PRM

**interReferences** (*PRMexplorer self*, *str interface\_name*)

**Parameters** **interface\_name** (*str*) – an interface

**Returns** the list of (<reference\_type>,<reference\_name>,<True if the reference is an array>) for the given interface

**Return type** list

**Raises** `gum.IndexError` – If the type is not in the PRM

**interfaces** (*PRMexplorer self*)

**Returns** the list of interfaces in the PRM

**Return type** list

**isAttribute** (*PRMexplorer self*, *str class\_name*, *str att\_name*)

**Parameters**

- **class\_name** (*str*) – a class name
- **att\_name** (*str*) – the name of the attribute to be tested

**Returns** True if att\_name is an attribute of class\_name

**Return type** bool

**Raises**

- `gum.IndexError` – If the class is not in the PRM
- `gum.IndexError` – If att\_name is not an element of class\_name

**isClass** (*PRMexplorer self*, *str name*)

**Parameters** **name** (*str*) – an element name

**Returns** True if the parameter correspond to a class in the PRM

**Return type** bool

**isInterface** (*PRMexplorer self*, *str name*)

**Parameters** **name** (*str*) – an element name

**Returns** True if the parameter correspond to an interface in the PRM

**Return type** bool

**isType** (*PRMexplorer self*, *str name*)

**Parameters** **name** (*str*) – an element name

**Returns** True if the parameter correspond to a type in the PRM

**Return type** bool

**load** (*PRMexplorer self*, *str filename*, *str classpath=""*, *bool verbose=False*)

Load a PRM into the explorer.

**Parameters**

- **filename** (*str*) – the name of the o3prm file
- **classpath** (*str*) – the classpath of the PRM

**Raises** `gum.FatalError` – If file not found

**types** (*PRMexplorer self*)

**Returns** the list of the custom types in the PRM

**Return type** list



# CHAPTER 12

---

## Credal Networks

---

### 12.1 Model

**class** `pyAgrum.CredalNet(*args)`

Constructor used to create a CredalNet (step by step or with two BayesNet)

**CredalNet() -> CredalNet** default constructor

**CredalNet(src\_min\_num,src\_max\_den) -> CredalNet**

**Parameters:**

- **src\_min\_num** (*str*) – the path to a BayesNet which contains lower probabilities.
- **src\_max\_den** (*str*) – the (optional) path to a BayesNet which contains upper probabilities.

**CredalNet(src\_min\_num,src\_max\_den) -> CredalNet**

**Parameters:**

- **\*\*src\_min\_num** (*pyAgrum.BayesNet*) – the BayesNet which contains lower probabilities.
- **\*\*src\_max\_den** (*pyAgrum.BayesNet*) – the (optional) BayesNet which contains upper probabilities.

**addArc (CredalNet self, int tail, int head)**

Adds an arc between two nodes

**Parameters**

- **tail** – the id of the tail node
- **head** (*int*) – the id of the head node

**Raises**

- `gum.InvalidDirectedCircle` – If any (directed) cycle is created by this arc
- `gum.InvalidNode` – If head or tail does not belong to the graph nodes
- `gum.DuplicateElement` – If one of the arc already exists

**addVariable (CredalNet self, str name, int card)**

**Parameters**

- **name** (*str*) – the name of the new variable
- **card** (*int*) – the domainSize of the new variable

**Returns** the id of the new node

**Return type** int

#### **approximatedBinarization** (*CredalNet self*)

Approximate binarization.

Each bit has a lower and upper probability which is the lowest - resp. highest - over all vertices of the credal set. Enlarge the original credal sets and may induce huge imprecision.

**Warning:** Enlarge the original credal sets and therefor induce huge imprecision by propagation.  
Not recommended, use MCSampling or something else instead

#### **bnToCredal** (*CredalNet self, double beta, bool oneNet, bool keepZeroes=False*)

Perturbates the BayesNet provided as input for this CredalNet by generating intervals instead of point probabilities and then computes each vertex of each credal set.

##### **Parameters**

- **beta** (*double*) – The beta used to perturbate the network
- **oneNet** (*bool*) – used as a flag. Set to True if one BayesNet if provided with counts, to False if two BayesNet are provided; one with probabilities (the lower net) and one with denominators over the first modalities (the upper net)
- **keepZeroes** (*bool*) – used as a flag as whether or not - respectively True or False - we keep zeroes as zeroes. Default is False, i.e. zeroes are not kept

#### **computeCPTMinMax** (*CredalNet self*)

Used with binary networks to speed-up L2U inference.

Store the lower and upper probabilities of each node X over the ‘True’ modality.

#### **credalNet\_currentCpt** (*CredalNet self*)

**Warning:** Experimental function - Return type to be wrapped

**Returns** a constant reference to the (up-to-date) CredalNet CPTs.

**Return type** tbw

#### **credalNet\_srcCpt** (*CredalNet self*)

**Warning:** Experimental function - Return type to be wrapped

**Returns** a constant reference to the (up-to-date) CredalNet CPTs.

**Return type** tbw

#### **currentNodeType** (*CredalNet self, int id*)

**Parameters** **id** (*int*) – The constant reference to the choosen NodeId

**Returns** the type of the choosen node in the (up-to-date) CredalNet \_\_current\_bn if any, \_\_src\_bn otherwise.

**Return type** [pyAgrum.CredalNet](#) (page 199)

**current\_bn** (*CredalNet self*)

**Returns** Returs a constant reference to the actual BayesNet (used as a DAG, it's CPTs does not matter).

**Return type** [pyAgrum.BayesNet](#) (page 3)

**domainSize** (*CredalNet self, int id*)

**Parameters** **id** (*int*) – The id of the node

**Returns** The cardinality of the node

**Return type** int

**epsilonMax** (*CredalNet self*)

**Returns** a constant reference to the highest perturbation of the BayesNet provided as input for this CredalNet.

**Return type** double

**epsilonMean** (*CredalNet self*)

**Returns** a constant reference to the average perturbation of the BayesNet provided as input for this CredalNet.

**Return type** double

**epsilonMin** (*CredalNet self*)

**Returns** a constant reference to the lowest perturbation of the BayesNet provided as input for this CredalNet.

**Return type** double

**fillConstraint** (*CredalNet self, int id, int entry, Vector lower, Vector upper*)

fillConstraint(*CredalNet self, int id, Instantiation ins, Vector lower, Vector upper*)

Set the interval constraints of a credal set of a given node (from an instantiation index)

**Parameters**

- **id** (*int*) – The id of the node
- **entry** (*int*) – The index of the instantiation excluding the given node (only the parents are used to compute the index of the credal set)
- **ins** ([pyAgrum.Instantiation](#) (page 146)) – The Instantiation
- **lower** (*list*) – The lower value for each probability in correct order
- **upper** (*list*) – The upper value for each probability in correct order

**Warning:** You need to call intervalToCredal when done filling all constraints.

**Warning:** DOES change the BayesNet (s) associated to this credal net !

**fillConstraints** (*CredalNet self, int id, Vector lower, Vector upper*)

Set the interval constraints of the credal sets of a given node (all instantiations)

**Parameters**

- **id** (*int*) – The id of the node
- **lower** (*list*) – The lower value for each probability in correct order

- **upper** (*list*) – The upper value for each probability in correct order

**Warning:** You need to call intervalToCredal when done filling all constraints.

**Warning:** DOES change the BayesNet (s) associated to this credal net !

**get\_CPT\_max** (*CredalNet self*)

**Warning:** Experimental function - Return type to be wrapped

**Returns** a constant reference to the upper probabilities of each node X over the ‘True’ modality

**Return type** tbw

**get\_CPT\_min** (*CredalNet self*)

**Warning:** Experimental function - Return type to be wrapped

**Returns** a constant reference to the lower probabilities of each node X over the ‘True’ modality

**Return type** tbw

**hasComputedCPTMinMax** (*CredalNet self*)

**Returns** True this CredalNet has called computeCPTMinMax() to speed-up inference with binary networks and L2U.

**Return type** bool

**idmLearning** (*CredalNet self, int s=0, bool keepZeroes=False*)

Learns parameters from a BayesNet storing counts of events.

Use this method when using a single BayesNet storing counts of events. IDM model if *s* > 0, standard point probability if *s* = 0 (default value if none precised).

#### Parameters

- **s** (*int*) – the IDM parameter.
- **keepZeroes** (*bool*) – used as a flag as whether or not - respectively True or False
  - we keep zeroes as zeroes. Default is False, i.e. zeroes are not kept.

**instantiation** (*CredalNet self, int id*)

Get an Instantiation from a node id, usefull to fill the constraints of the network.

bnet accessors / shortcuts.

**Parameters** **id** (*int*) – the id of the node we want an instantiation from

**Returns** the instantiation

**Return type** *pyAgrum.Instantiation* (page 146)

**intervalToCredal** (*CredalNet self*)

Computes the vertices of each credal set according to their interval definition (uses lrs).

Use this method when using two BayesNet, one with lower probabilities and one with upper probabilities.

**intervalToCredalWithFiles** (*CredalNet self*)

**Warning:** Deprecated : use intervalToCredal (lrsWrapper with no input / output files needed).

Computes the vertices of each credal set according to their interval definition (uses lrs).

Use this method when using a single BayesNet storing counts of events.

**isSeparatelySpecified** (*CredalNet self*)

**Returns** True if this CredalNet is separately and interval specified, False otherwise.

**Return type** bool

**lagrangeNormalization** (*CredalNet self*)

Normalize counts of a BayesNet storing counts of each events such that no probability is 0.

Use this method when using a single BayesNet storing counts of events. Lagrange normalization. This call is irreversible and modify counts stored by \_\_src\_bn.

Doest not performs computations of the parameters but keeps normalized counts of events only. Call idmLearning to compute the probabilities (with any parameter value).

**nodeType** (*CredalNet self, int id*)

**Parameters** **id** (*int*) – the constant reference to the choosen NodeId

**Returns** the type of the choosen node in the (up-to-date) CredalNet in \_\_src\_bn.

**Return type** [pyAgrum.CredalNet](#) (page 199)

**saveBNSMinMax** (*CredalNet self, str min\_path, str max\_path*)

If this CredalNet was built over a perturbed BayesNet, one can save the intervals as two BayesNet.

to call after bnToCredal(GUM\_SCALAR beta) save a BN with lower probabilities and a BN with upper ones

**Parameters**

- **min\_path** (*str*) – the path to save the BayesNet which contains the lower probabilities of each node X.
- **max\_path** (*str*) – the path to save the BayesNet which contains the upper probabilities of each node X.

**setCPT** (*CredalNet self, int id, int entry, vector<vector<double, allocator>, allocator<vector<double, allocator>>> cpt*)

setCPT(CredalNet self, int id, Instantiation ins, vector<vector<double,allocator>,allocator<vector<double,allocator>>> cpt)

**Warning:** (experimental function) - Parameters to be wrapped

Set the vertices of one credal set of a given node (any instantiation index)

**Parameters**

- **id** (*int*) – the Id of the node
- **entry** (*int*) – the index of the instantiation (from 0 to K - 1) excluding the given node (only the parents are used to compute the index of the credal set)

- **ins** (`pyAgrum.Instantiation` (page 146)) – the Instantiation (only the parents matter to find the credal set index)
- **cpt** (`tbw`) – the vertices of every credal set (for each instantiation of the parents)

**Warning:** DOES not change the BayesNet(s) associated to this credal net !

```
setCPTs (CredalNet self, int id, vector<vector<double, allocator>, allocator<vector<double, allocator>>, allocator<vector<double, allocator>, allocator<vector<double, allocator>>> cpt)
```

**Warning:** (experimental function) - Parameters to be wrapped

Set the vertices of the credal sets (all of the conditionals) of a given node

#### Parameters

- **id** (`int`) – the NodeId of the node
- **cpt** (`tbw`) – the vertices of every credal set (for each instantiation of the parents)

**Warning:** DOES not change the BayesNet (s) associated to this credal net !

```
src_bn (CredalNet self)
```

**Returns** Returns a constant reference to the original BayesNet (used as a DAG, it's CPTs does not matter).

**Return type** `pyAgrum.BayesNet` (page 3)

## 12.2 Inference

```
class pyAgrum.CNMonteCarloSampling (credalNet: pyAgrum.CredalNet)
```

Class used for inferences in credal networks with Monte Carlo sampling algorithm.

```
CNMonteCarloSampling(cn) -> CNMonteCarloSampling
```

#### Parameters:

- **cn** (`pyAgrum.CredalNet`) – a credal network

```
currentTime (CNMonteCarloSampling self)
```

**Returns** get the current running time in second (double)

**Return type** double

```
dynamicExpMax (CNMonteCarloSampling self, str varName)
```

Get the upper dynamic expectation of a given variable prefix.

**Parameters** **varName** (`str`) – the variable name prefix which upper expectation we want.

**Returns** a constant reference to the variable upper expectation over all time steps.

**Return type** double

```
dynamicExpMin (CNMonteCarloSampling self, str varName)
```

Get the lower dynamic expectation of a given variable prefix.

**Parameters** **varName** (`str`) – the variable name prefix which lower expectation we want.

**Returns** a constant reference to the variable lower expectation over all time steps.

**Return type** double

**epsilon** (*CNMonteCarloSampling self*)

**Returns** the value of epsilon

**Return type** double

**history** (*CNMonteCarloSampling self*)

**Returns** the scheme history

**Return type** tuple

**Raises** `gum.OperationNotAllowed` – If the scheme did not performed or if verbosity is set to false

**insertEvidenceFile** (*CNMonteCarloSampling self, str path*)

Insert evidence from file.

**Parameters** `path (str)` – the path to the evidence file.

**insertModalsFile** (*CNMonteCarloSampling self, str path*)

Insert variables modalities from file to compute expectations.

**Parameters** `path (str)` – The path to the modalities file.

**makeInference** (*CNMonteCarloSampling self*)

Starts the inference.

**marginalMax** (*CNMonteCarloSampling self, int id*)

`marginalMax(CNMonteCarloSampling self, str name) -> Vector`

Get the upper marginals of a given node id.

**Parameters**

- `id (int)` – the node id which upper marginals we want.
- `varName (str)` – the variable name which upper marginals we want.

**Returns** a constant reference to this node upper marginals.

**Return type** list

**Raises** `gum.IndexError` – If the node does not belong to the Credal network

**marginalMin** (*CNMonteCarloSampling self, int id*)

`marginalMin(CNMonteCarloSampling self, str name) -> Vector`

Get the lower marginals of a given node id.

**Parameters**

- `id (int)` – the node id which lower marginals we want.
- `varName (str)` – the variable name which lower marginals we want.

**Returns** a constant reference to this node lower marginals.

**Return type** list

**Raises** `gum.IndexError` – If the node does not belong to the Credal network

**maxIter** (*CNMonteCarloSampling self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*CNMonteCarloSampling self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*CNMonteCarloSampling self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*CNMonteCarloSampling self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrIterations** (*CNMonteCarloSampling self*)

**Returns** the number of iterations

**Return type** int

**periodSize** (*CNMonteCarloSampling self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**setEpsilon** (*CNMonteCarloSampling self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If eps<0

**setMaxIter** (*CNMonteCarloSampling self, int max*)

**Parameters** **max** (*int*) – the maximum number of iteration

**Raises** gum.OutOfLowerBound – If max <= 1

**setMaxTime** (*CNMonteCarloSampling self, double timeout*)

**Parameters** **timeout** (*double*) – stopping criterion on timeout (in seconds)

**Raises** gum.OutOfLowerBound – If timeout<=0.0

**setMinEpsilonRate** (*CNMonteCarloSampling self, double rate*)

**Parameters** **rate** (*double*) – the minimal epsilon rate

**setPeriodSize** (*CNMonteCarloSampling self, int p*)

**Parameters** **p** (*int*) – number of samples between 2 stopping

**Raises** gum.OutOfLowerBound – If p<1

**setRepetitiveInd** (*CNMonteCarloSampling self, bool flag*)

**Parameters** **flag** (*bool*) – True if repetitive independence is to be used, false otherwise.

Only usefull with dynamic networks.

**setVerbosity** (*CNMonteCarloSampling self, bool v*)

**Parameters** **v** (*bool*) – verbosity

**verbosity** (*CNMonteCarloSampling self*)

**Returns** True if the verbosity is enabled

**Return type** bool

**class** pyAgrum.**CNLoopyPropagation** (*cnet: pyAgrum.CredalNet*)

Class used for inferences in credal networks with Loopy Propagation algorithm.

**CNLoopyPropagation(cn) -> CNLoopyPropagation**

**Parameters:**

- **cn** (*pyAgrum.CredalNet*) – a Credal network

**currentTime** (*CNLoopyPropagation self*)

**Returns** get the current running time in second (double)

**Return type** double

**dynamicExpMax** (*CNLoopyPropagation self, str varName*)

Get the upper dynamic expectation of a given variable prefix.

**Parameters** **varName** (*str*) – the variable name prefix which upper expectation we want.

**Returns** a constant reference to the variable upper expectation over all time steps.

**Return type** double

**dynamicExpMin** (*CNLoopyPropagation self, str varName*)

Get the lower dynamic expectation of a given variable prefix.

**Parameters** **varName** (*str*) – the variable name prefix which lower expectation we want.

**Returns** a constant reference to the variable lower expectation over all time steps.

**Return type** double

**epsilon** (*CNLoopyPropagation self*)

**Returns** the value of epsilon

**Return type** double

**eraseAllEvidence** (*CNLoopyPropagation self*)

Erase all inference related data to perform another one.

You need to insert evidence again if needed but modalities are kept. You can insert new ones by using the appropriate method which will delete the old ones.

**history** (*CNLoopyPropagation self*)

**Returns** the scheme history

**Return type** tuple

**Raises** `gum.OperationNotAllowed` – If the scheme did not performed or if verbosity is set to false

**inferenceType** (*CNLoopyPropagation self, pyAgrum.credal::CNLoopyPropagation ::InferenceType infi*)

`inferenceType(CNLoopyPropagation self) -> pyAgrum.credal::CNLoopyPropagation ::InferenceType`

**Returns** the inference type

**Return type** int

**insertEvidenceFile** (*CNLoopyPropagation self, str path*)

Insert evidence from file.

**Parameters** **path** (*str*) – the path to the evidence file.

**insertModalsFile** (*CNLoopyPropagation self, str path*)

Insert variables modalities from file to compute expectations.

**Parameters** **path** (*str*) – The path to the modalities file.

**makeInference** (*CNLoopyPropagation self*)

Starts the inference.

**marginalMax** (*CNLoopyPropagation self, int id*)

`marginalMax(CNLoopyPropagation self, str name) -> Vector`

Get the upper marginals of a given node id.

**Parameters**

- **id** (*int*) – the node id which upper marginals we want.

- **varName** (*str*) – the variable name which upper marginals we want.

**Returns** a constant reference to this node upper marginals.

**Return type** list

**Raises** gum.IndexError – If the node does not belong to the Credal network

**marginalMin** (*CNLoopyPropagation self, int id*)

marginalMin(*CNLoopyPropagation self, str name*) -> Vector

Get the lower marginals of a given node id.

**Parameters**

- **id** (*int*) – the node id which lower marginals we want.
- **varName** (*str*) – the variable name which lower marginals we want.

**Returns** a constant reference to this node lower marginals.

**Return type** list

**Raises** gum.IndexError – If the node does not belong to the Credal network

**maxIter** (*CNLoopyPropagation self*)

**Returns** the criterion on number of iterations

**Return type** int

**maxTime** (*CNLoopyPropagation self*)

**Returns** the timeout(in seconds)

**Return type** double

**messageApproximationScheme** (*CNLoopyPropagation self*)

**Returns** the approximation scheme message

**Return type** str

**minEpsilonRate** (*CNLoopyPropagation self*)

**Returns** the value of the minimal epsilon rate

**Return type** double

**nbrIterations** (*CNLoopyPropagation self*)

**Returns** the number of iterations

**Return type** int

**periodSize** (*CNLoopyPropagation self*)

**Returns** the number of samples between 2 stopping

**Return type** int

**Raises** gum.OutOfLowerBound – If p<1

**saveInference** (*CNLoopyPropagation self, str path*)

Saves marginals.

**Parameters** **path** (*str*) – The path to the file to save marginals.

**setEpsilon** (*CNLoopyPropagation self, double eps*)

**Parameters** **eps** (*double*) – the epsilon we want to use

**Raises** gum.OutOfLowerBound – If eps<0

**setMaxIter** (*CNLoopyPropagation self, int max*)

**Parameters** **max** (*int*) – the maximum number of iteration

**Raises** `gum.OutOfLowerBound` – If max <= 1

**setMaxTime** (`CNLoopyPropagation self, double timeout`)

**Parameters** `timeout` (`double`) – stopping criterion on timeout (in seconds)

**Raises** `gum.OutOfLowerBound` – If timeout<=0.0

**setMinEpsilonRate** (`CNLoopyPropagation self, double rate`)

**Parameters** `rate` (`double`) – the minimal epsilon rate

**setPeriodSize** (`CNLoopyPropagation self, int p`)

**Parameters** `p` (`int`) – number of samples between 2 stopping

**Raises** `gum.OutOfLowerBound` – If p<1

**setRepetitiveInd** (`CNLoopyPropagation self, bool flag`)

**Parameters** `flag` (`bool`) – True if repetitive independence is to be used, false otherwise.  
        Only usefull with dynamic networks.

**setVerbosity** (`CNLoopyPropagation self, bool v`)

**Parameters** `v` (`bool`) – verbosity

**verbosity** (`CNLoopyPropagation self`)

**Returns** True if the verbosity is enabled

**Return type** `bool`



# CHAPTER 13

## Influence Diagram

### 13.1 Model

```
class pyAgrum.InfluenceDiagram(*args)
```

InfluenceDiagram represents an Influence Diagram.

**InfluenceDiagram()** -> **InfluenceDiagram** default constructor

**InfluenceDiagram(source)** -> **InfluenceDiagram**

**Parameters:**

- **source** (*pyAgrum.InfluenceDiagram*) – the InfluenceDiagram to copy

**add** (*InfluenceDiagram self, DiscreteVariable variable, int id=0*)

Add a chance variable, it's associate node and it's CPT.

The id of the new variable is automatically generated.

**Parameters**

- **variable** (*pyAgrum.DiscreteVariable* (page 133)) – The variable added by copy.
- **id** (*int*) – The chosen id. If 0, the NodeGraphPart will choose.

**Warning:** give an id (not 0) should be reserved for rare and specific situations !!!

**Returns** the id of the added variable.

**Return type** int

**Raises** *gum.DuplicateElement* – If id(<>0) is already used

**addArc** (*InfluenceDiagram self, int tail, int head*)

addArc(*InfluenceDiagram self, str tail, str head*)

Add an arc in the ID, and update diagram's potential nodes cpt if necessary.

**Parameters**

- **tail** (*int*) – the id of the tail node

- **head** (*int*) – the id of the head node

**Raises**

- gum.InvalidEdge – If arc.tail and/or arc.head are not in the ID.
- gum.InvalidEdge – If tail is a utility node

**addChanceNode** (*InfluenceDiagram self, DiscreteVariable variable, int id=0*)  
addChanceNode(*InfluenceDiagram self, DiscreteVariable variable, pyAgrum.MultiDimImplementation aContent, int id=0*) -> *int*

Add a chance variable, it's associate node and it's CPT.

The id of the new variable is automatically generated.

**Parameters**

- **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable added by copy.
- **id** (*int*) – the chosen id. If 0, the NodeGraphPart will choose.

**Warning:** give an id (not 0) should be reserved for rare and specific situations !!!

**Returns** the id of the added variable.

**Return type** *int*

**Raises** gum.DuplicateElement – If id(<>0) is already used

**addDecisionNode** (*InfluenceDiagram self, DiscreteVariable variable, int id=0*)

Add a decision variable.

The id of the new variable is automatically generated.

**Parameters**

- **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable added by copy.
- **id** (*int*) – the chosen id. If 0, the NodeGraphPart will choose.

**Warning:** give an id (not 0) should be reserved for rare and specific situations !!!

**Returns** the id of the added variable.

**Return type** *int*

**Raises** gum.DuplicateElement – If id(<>0) is already used

**addUtilityNode** (*InfluenceDiagram self, DiscreteVariable variable, int id=0*)

addUtilityNode(*InfluenceDiagram self, DiscreteVariable variable, pyAgrum.MultiDimImplementation aContent, int id=0*) -> *int*

Add a utility variable, it's associate node and it's UT.

The id of the new variable is automatically generated.

**Parameters**

- **variable** ([pyAgrum.DiscreteVariable](#) (page 133)) – the variable added by copy
- **id** (*int*) – the chosen id. If 0, the NodeGraphPart will choose

**Warning:** give an id (not 0) should be reserved for rare and specific situations !!!

**Returns** the id of the added variable.

**Return type** int

**Raises**

- gum.InvalidArgument – If variable has more than one label
- gum.DuplicateElement – If id(<>0) is already used

**arcs** (*InfluenceDiagram self*)

**Returns** the list of all the arcs in the Influence Diagram.

**Return type** list

**chanceNodeSize** (*InfluenceDiagram self*)

**Returns** the number of chance nodes.

**Return type** int

**changeVariableName** (*InfluenceDiagram self, int id, str new\_name*)

changeVariableName(*InfluenceDiagram self, str name, str new\_name*)

**Parameters**

- **id** (int) – the node Id
- **new\_name** (str) – the name of the variable

**Raises**

- gum.DuplicateLabel – If this name already exists
- gum.NotFound – If no nodes matches id.

**children** (*InfluenceDiagram self, int id*)

**Parameters** **id** (int) – the id of the parent

**Returns** the set of all the children

**Return type** Set

**completeInstantiation** (*DAGmodel self*)

Get an instantiation over all the variables of the model.

**Returns** the complete instantiation

**Return type** pyAgrum.instantiation

**cpt** (*InfluenceDiagram self, int varId*)

Returns the CPT of a variable.

**Parameters** **VarId** (int) – A variable's id in the pyAgrum.BayesNet.

**Returns** The variable's CPT.

**Return type** pyAgrum.Potential (page 151)

**Raises** gum.NotFound – If no variable's id matches varId.

**dag** (*DAGmodel self*)

**Returns** a constant reference to the dag of this BayesNet.

**Return type** pyAgrum.DAG (page 119)

**decisionNodeSize** (*InfluenceDiagram self*)

**Returns** the number of decision nodes

**Return type** int

**decisionOrderExists** (*InfluenceDiagram self*)

**Returns** True if a directed path exist with all decision node

**Return type** bool

**empty** (*DAGmodel self*)

**Returns** True if the model is empty

**Return type** bool

**erase** (*InfluenceDiagram self, int id*)

erase(*InfluenceDiagram self*, str name) erase(*InfluenceDiagram self*, DiscreteVariable var)

Erase a Variable from the network and remove the variable from all his childs.

If no variable matches the id, then nothing is done.

**Parameters**

- **id** (int) – The id of the variable to erase.
- **var** ([pyAgrum.DiscreteVariable](#) (page 133)) – The reference on the variable to remove.

**eraseArc** (*InfluenceDiagram self, Arc arc*)

eraseArc(*InfluenceDiagram self*, int tail, int head) eraseArc(*InfluenceDiagram self*, str tail, str head)

Removes an arc in the ID, and update diagram's potential nodes cpt if necessary.

If (tail, head) doesn't exist, the nothing happens.

**Parameters**

- **arc** ([pyAgrum.Arc](#) (page 115)) – The arc to be removed.
- **tail** (int) – the id of the tail node
- **head** (int) – the id of the head node

**existsPathBetween** (*InfluenceDiagram self, int src, int dest*)

existsPathBetween(*InfluenceDiagram self*, str src, str dest) -> bool

**Returns** true if a path exists between two nodes.

**Return type** bool

**getDecisionGraph** (*InfluenceDiagram self*)

**Returns** the temporal Graph.

**Return type** [pyAgrum.DAG](#) (page 119)

**getDecisionOrder** (*InfluenceDiagram self*)

**Returns** the sequence of decision nodes in the directed path.

**Return type** list

**Raises** [NotFound](#) (page 234) – If such a path does not exist

**hasSameStructure** (*DAGmodel self, DAGmodel other*)

**Parameters** [pyAgrum.DAGmodel](#) – a direct acyclic model

**Returns** True if all the named node are the same and all the named arcs are the same

**Return type** bool

**idFromName** (*InfluenceDiagram self, str name*)

Returns a variable's id given its name.

**Parameters** `name` (`str`) – the variable's name from which the id is returned.

**Returns** the variable's node id.

**Return type** int

**Raises** `gum.NotFound` – If no such name exists in the graph.

### `ids()`

Deprecated method in pyAgrum>0.12.0. See `nodes` instead.

### `isChanceNode (InfluenceDiagram self, int varId)`

`isChanceNode(InfluenceDiagram self, str name) -> bool`

**Parameters** `varId` (`int`) – the tested node id.

**Returns** true if node is a chance node

**Return type** bool

### `isDecisionNode (InfluenceDiagram self, int varId)`

`isDecisionNode(InfluenceDiagram self, str name) -> bool`

**Parameters** `varId` (`int`) – the tested node id.

**Returns** true if node is a decision node

**Return type** bool

### `isUtilityNode (InfluenceDiagram self, int varId)`

`isUtilityNode(InfluenceDiagram self, str name) -> bool`

**Parameters** `varId` (`int`) – the tested node id.

**Returns** true if node is an utility node

**Return type** bool

### `loadBIFXML (InfluenceDiagram self, str name, PyObject * l=(PyObject *) 0)`

Load a BIFXML file.

**Parameters** `name` (`str`) – the name's file

**Raises**

- `gum.IOError` – If file not found
- `gum.FatalError` – If file is not valid

### `log10DomainSize (DAGmodel self)`

**Returns** The log10 domain size of the joint probability for the model.

**Return type** double

### `moralGraph (DAGmodel self, bool clear=True)`

Returns the moral graph of the BayesNet, formed by adding edges between all pairs of nodes that have a common child, and then making all edges in the graph undirected.

**Returns** The moral graph

**Return type** `pyAgrum.UndiGraph` (page 121)

### `names (InfluenceDiagram self)`

**Returns** The names of the InfluenceDiagram variables

**Return type** list

### `nodeId (InfluenceDiagram self, DiscreteVariable var)`

**Parameters** `var` (`pyAgrum.DiscreteVariable` (page 133)) – a variable

**Returns** the id of the variable

**Return type** int

**Raises** `gum.IndexError` – If the InfluenceDiagram does not contain the variable `nodes` (*InfluenceDiagram self*)

**Returns** the set of ids

**Return type** set

**parents** (*InfluenceDiagram self, int id*)

**Parameters** `id` – The id of the child node

**Returns** the set of the parents ids.

**Return type** set

**property** (*DAGmodel self, str name*)

**Warning:** Unreferenced function

**propertyWithDefault** (*DAGmodel self, str name, str byDefault*)

**Warning:** Unreferenced function

**saveBIFXML** (*InfluenceDiagram self, str name*)

Save the BayesNet in a BIFXML file.

**Parameters** `name` (`str`) – the file's name

**setProperty** (*DAGmodel self, str name, str value*)

**Warning:** Unreferenced function

**size** (*DAGmodel self*)

**Returns** the number of nodes in the graph

**Return type** int

**sizeArcs** (*DAGmodel self*)

**Returns** the number of arcs in the graph

**Return type** int

**toDot** (*InfluenceDiagram self*)

**Returns** a friendly display of the graph in DOT format

**Return type** str

**topologicalOrder** (*DAGmodel self, bool clear=True*)

**Returns** the list of the nodes Ids in a topological order

**Return type** List

**Raises** `gum.InvalidDirectedCycle` – If this graph contains cycles

**utility** (*InfluenceDiagram self, int varId*)

**Parameters** `varId` (`int`) – the tested node id.

**Returns** the utility table of the node

**Return type** `pyAgrum.Potential` (page 151)

**Raises** `gum.IndexError` – If the InfluenceDiagram does not contain the variable

**utilityNodeSize** (`InfluenceDiagram self`)

**Returns** the number of utility nodes

**Return type** int

**variable** (`InfluenceDiagram self, int id`)

**Parameters** `id` (int) – the node id

**Returns** a constant reference over a variabe given it's node id

**Return type** `pyAgrum.DiscreteVariable` (page 133)

**Raises** `gum.NotFound` – If no variable's id matches the parameter

**variableFromName** (`InfluenceDiagram self, str name`)

**Parameters** `name` (str) – a variable's name

**Returns** the variable

**Return type** `pyAgrum.DiscreteVariable` (page 133)

**Raises** `gum.IndexError` – If the InfluenceDiagram does not contain the variable

**variableNodeMap** (`DAGmodel self`)

**Returns** the variable node map

**Return type** `pyAgrum.variableNodeMap`

## 13.2 Inference

```
class pyAgrum.InfluenceDiagramInference (infDiag: pyAgrum.InfluenceDiagram)
    Proxy of C++ pyAgrum.InfluenceDiagramInference class.           Proxy of C++ pyA-
    grum.InfluenceDiagramInference class.

    displayResult (InfluenceDiagramInference self)
        Displays the result of an inference.

    displayStrongJunctionTree (InfluenceDiagramInference self, ostream stream=cout)
        Displays on terminal the result of strong junction tree computation for test purpose only.

        Parameters args (TBW) –
```

**eraseAllEvidence** (`InfluenceDiagramInference self`)

Removes all the evidence entered into the diagram.

**eraseEvidence** (`InfluenceDiagramInference self, Potential evidence`)

**Parameters** `evidence` (`pyAgrum.Potential` (page 151)) – the evidence to remove

**Raises** `gum.IndexError` – If the evidence does not belong to the influence diagram

**getBestDecisionChoice** (`InfluenceDiagramInference self, int decisionId`)

Returns best choice for decision variable given in parameter ( based upon MEU criteria )

**Parameters** `decisionId` (int) – the id of the decision variable

**Raises**

- `gum.OperationNotAllowed` – If no inference have yet been made
- `gum.InvalidNode` – If node given in parmaeter is not a decision node

**getMEU** (*InfluenceDiagramInference self*)

Returns maximum expected utility obtained from inference.

**Raises** `gum.OperationNotAllowed` – If no inference have yet been made

**influenceDiagram** (*InfluenceDiagramInference self*)

Returns a constant reference over the InfluenceDiagram on which this class work.

**Returns** the InfluenceDiagram on which this class work

**Return type** `pyAgrum.InfluenceDiagram` (page 211)

**insertEvidence** (*InfluenceDiagramInference self, pyAgrum.List< pyAgrum.Potential \* > evidenceList*)

Insert new evidence in the graph.

**Parameters** `evidenceList` (*list*) – a list of potentials as evidences

**Warning:** If an evidence already w.r.t. a given node and a new evidence w.r.t. this node is inserted, the old evidence is removed

**Raises** `gum.OperationNotAllowed` – If an evidence is over more than one variable

**junctionTreeToDot** (*InfluenceDiagramInference self*)

**Returns** the result of strong junction tree computation for test purpose only.

**Return type** str

**makeInference** (*InfluenceDiagramInference self*)

Makes the inference.

**setEvidence** (*evidces*)

Erase all the evidences and apply `addEvidence(key,value)` for every pairs in evidces.

**Parameters** `evidces` (*dict*) – a dict of evidences

**Raises**

- `gum.InvalidArgument` – If one value is not a value for the node
- `gum.InvalidArgument` – If the size of a value is different from the domain side of the node
- `gum.FatalError` – If one value is a vector of 0s
- `gum.UndefinedElement` – If one node does not belong to the Bayesian network

# CHAPTER 14

## Functions from pyAgrum

Useful functions in pyAgrum

```
pyAgrum.about()  
    about() for pyAgrum
```

```
pyAgrum.fastBN(arcs, domain_size=2)
```

**Create a Bayesian network with a dot-like syntax which specifies:**

- the structure ‘a->b->c;b->d<-e;’.
- the type of the variables with different syntax:
  - by default, a variable is a gum.RangeVariable using the default domain size (second argument)
  - with ‘a[10]’, the variable is a gum.RangeVariable using 10 as domain size (from 0 to 9)
  - with ‘a[3,7]’, the variable is a gum.RangeVariable using a domainSize from 3 to 7
  - with ‘a[1,3,14,5,6,2]’, the variable is a gum.DiscretizedVariable using the given ticks (at least 3 values)
  - with ‘a{top|middle|bottom}’, the variable is a gum.LabelizedVariable using the given labels.

---

**Note:**

- If the dot-like string contains such a specification more than once for a variable, the first specification will be used.
  - the CPTs are randomly generated.
- 

### Examples

```
>>> import pyAgrum as gum  
>>> bn=gum.fastBN('A->B[1,3]<-C{yes|No}->D[2,4]<-E[1,2.5,3.9]', 6)
```

### Parameters

- **dotlike** (*str*) – the string containing the specification

- **domainSize** (*int*) – the default domain size for variables

**Returns** the resulting bayesian network

**Return type** *pyAgrum.BayesNet* (page 3)

**pyAgrum.getPosterior** (*bn, evs, target*)

Compute the posterior of a single target (variable) in a BN given evidence

`getPosterior` uses a VariableElimination inference. If more than one target is needed with the same set of evidence or if the same target is needed with more than one set of evidence, this function is not relevant since it creates a new inference engine every time it is called.

#### Parameters

- **bn** (*pyAgrum.BayesNet* (page 3)) – The Bayesian network
- **evs** (*dictionaryDict*) – {name/id:val, name/id : [ val1, val2 ], ... }
- **target** (*string or int*) – variable name or id

**Returns**

**Return type** posterior (*pyAgrum.Potential* (page 151))

## 14.1 Input/Output for bayesian networks

**pyAgrum.availableBNExts()**

Give the list of all formats known by pyAgrum to save a Bayesian network.

**Returns** a string which lists all suffixes for supported BN file formats.

**pyAgrum.loadBN** (*filename, listeners=None, verbose=False, \*\*opts*)

load a file with optional listeners and arguments

#### Parameters

- **filename** – the name of the input file
- **listeners** – list of functions to execute
- **verbose** – whether to print or not warning messages
- **system** – (for O3PRM) name of the system to flatten in a BN
- **classpath** – (for O3PRM) list of folders containing classes

**Returns** a BN from a file using one of the availableBNExts() suffixes.

Listeners could be added in order to monitor its loading.

### Examples

```
>>> import pyAgrum as gum
>>>
>>> # creating listeners
>>> def foo_listener(progress):
>>>     if progress==200:
>>>         print(' BN loaded ')
>>>         return
>>>     elif progress==100:
>>>         car='%'
>>>     elif progress%10==0:
>>>         car='#'
>>>     else:
```

(continues on next page)

(continued from previous page)

```
>>>         car='.'
>>>     print(car,end='',flush=True)
>>>
>>> def bar_listener(progress):
>>>     if progress==50:
>>>         print('50%')
>>>
>>> # loadBN with list of listeners
>>> gum.loadBN('./bn.bif',listeners=[foo_listener,bar_listener])
>>> # .....#.....#.....#.....#..50%
>>> # .....#.....#.....#.....#.....#.....% / bn loaded
```

**pyAgrum.saveBN**(*bn, filename*)

save a BN into a file using the format corresponding to one of the availableWriteBNExts() suffixes.

**Parameters** **bn**(**gum.BayesNet**) – the BN to save**Parameters** **filename**(**str**) – the name of the output file

## 14.2 Input for influence diagram

**pyAgrum.loadID**(*filename*)read a **gum.InfluenceDiagram** from a bifxml file**Parameters** **filename** – the name of the input file**Returns** an InfluenceDiagram



# CHAPTER 15

---

## Other functions from aGrUM

---

### 15.1 Listeners

aGrUM includes a mechanism for listening to actions (close to QT signal/slot). Some of them have been ported to pyAgrum :

#### 15.1.1 LoadListener

Listeners could be added in order to monitor the progress when loading a pyAgrum.BayesNet

```
>>> import pyAgrum as gum
>>>
>>> # creating a new listeners
>>> def foo(progress):
>>>     if progress==200:
>>>         print(' BN loaded ')
>>>         return
>>>     elif progress==100:
>>>         car='%'
>>>     elif progress%10==0:
>>>         car='#'
>>>     else:
>>>         car='.'
>>>     print(car,end='',flush=True)
>>>
>>> def bar(progress):
>>>     if progress==50:
>>>         print('50%')
>>>
>>>
>>> gum.loadBN('./bn.bif',listeners=[foo,bar])
>>> # .....#.....#.....#..50%
>>> # .....#.....#.....#.....#.....% / bn loaded
```

### 15.1.2 StructuralListener

Listeners could also be added when structural modification are made in a pyAgrum.BayesNet:

```
>>> import pyAgrum as gum
>>>
>>> ## creating a BayesNet
>>> bn=gum.BayesNet()
>>>
>>> ## adding structural listeners
>>> bn.addStructureListener(whenNodeAdded=lambda n,s:print('adding {}:{}'.format(n,
->s)), whenArcAdded=lambda i,j: print('adding {}->{}'.
->format(i,j)), whenNodeDeleted=lambda n:print('deleting {}'.
->format(n)), whenArcDeleted=lambda i,j: print('deleting {}->{}'.
->format(i,j)))
>>>
>>> ## adding another listener for when a node is deleted
>>> bn.addStructureListener(whenNodeDeleted=lambda n: print('yes, really deleting
->'+str(n)))
>>>
>>> ## adding nodes to the BN
>>> l=[bn.add(item,3) for item in 'ABCDE']
>>> # adding 0:A
>>> # adding 1:B
>>> # adding 2:C
>>> # adding 3:D
>>> # adding 4:E
>>>
>>> ## adding arc to the BN
>>> bn.addArc(1,3)
>>> # adding 1->3
>>>
>>> ## removing a node from the BN
>>> bn.erase('C')
>>> # deleting 2
>>> # yes, really deleting 2
```

### 15.1.3 ApproximationSchemeListener

### 15.1.4 DatabaseGenerationListener

## 15.2 Random functions

pyAgrum.**initRandom** (*unsigned int seed=0*)

Initialize random generator seed.

**Parameters** **seed** (*int*) – the seed used to initialize the random generator

pyAgrum.**randomProba** ()

**Returns** a random number between 0 and 1 included (i.e. a proba).

**Return type** double

pyAgrum.**randomDistribution** (*int n*)

**Parameters** **n** (*int*) – The number of modalities for the ditribution.

**Returns**

**Return type** a random discrete distribution.

## 15.3 OMP functions

`pyAgrum.isOMP()`

**Returns** True if OMP has been set at compilation, False otherwise

**Return type** bool

`pyAgrum.setNumberOfThreads (unsigned int number)`

To avoid spare cycles (less than 100% CPU occupied), use more threads than logical processors (x2 is a good all-around value).

**Returns** **number** – the number of threads to be used

**Return type** int

`pyAgrum.getNumberOfLogicalProcessors()`

**Returns** the number of logical processors

**Return type** int

`pyAgrum.getMaxNumberOfThreads()`

**Returns** the max number of threads

**Return type** int



# CHAPTER 16

---

## Exceptions from aGrUM

---

All the classes inherit GumException's functions `errorType`, `errorCallStack` and `errorContent`.

```
exception pyAgrum.DefaultInLabel (*args)
    Proxy of C++ pyAgrum.DefaultInLabel class.

    errorCallStack (GumException self)
        Returns the error call stack
        Return type str
    errorContent (GumException self)
        Returns the error content
        Return type str
    errorType (GumException self)
        Returns the error type
        Return type str
    what (GumException self)
    with_traceback ()
        Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pyAgrum.DuplicateElement (*args)
    Proxy of C++ pyAgrum.DuplicateElement class.

    errorCallStack (GumException self)
        Returns the error call stack
        Return type str
    errorContent (GumException self)
        Returns the error content
        Return type str
    errorType (GumException self)
        Returns the error type
```

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.**DuplicateLabel** (\*args)

Proxy of C++ pyAgrum.DuplicateLabel class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.**EmptyBSTree** (\*args)

Proxy of C++ pyAgrum.EmptyBSTree class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.**EmptySet** (\*args)

Proxy of C++ pyAgrum.EmptySet class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.GumException (\*args)

Proxy of C++ pyAgrum.Exception class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.FatalError (\*args)

Proxy of C++ pyAgrum.FatalError class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.FormatNotFound (\*args)

Proxy of C++ pyAgrum.FormatNotFound class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

```
errorType (GumException self)
    Returns the error type
    Return type str

what (GumException self)
with_traceback ()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pyAgrum.GraphError (*args)
    Proxy of C++ pyAgrum.GraphError class.

errorCallStack (GumException self)
    Returns the error call stack
    Return type str

errorContent (GumException self)
    Returns the error content
    Return type str

errorType (GumException self)
    Returns the error type
    Return type str

what (GumException self)
with_traceback ()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pyAgrum.IOError (*args)
    Proxy of C++ pyAgrum.IOError class.

errorCallStack (GumException self)
    Returns the error call stack
    Return type str

errorContent (GumException self)
    Returns the error content
    Return type str

errorType (GumException self)
    Returns the error type
    Return type str

what (GumException self)
with_traceback ()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pyAgrum.IdError (*args)
    Proxy of C++ pyAgrum.IdError class.

errorCallStack (GumException self)
    Returns the error call stack
    Return type str

errorContent (GumException self)
    Returns the error content
```

---

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.InvalidArc (\*args)

Proxy of C++ pyAgrum.InvalidArc class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.InvalidArgument (\*args)

Proxy of C++ pyAgrum.InvalidArgument class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.InvalidArgumentsNumber (\*args)

Proxy of C++ pyAgrum.InvalidArgumentsNumber class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content  
**Return type** str

**errorType** (*GumException self*)

**Returns** the error type  
**Return type** str

**what** (*GumException self*)

**with\_traceback** ()  
Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.InvalidDirectedCycle (\*args)  
Proxy of C++ pyAgrum.InvalidDirectedCycle class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack  
**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content  
**Return type** str

**errorType** (*GumException self*)

**Returns** the error type  
**Return type** str

**what** (*GumException self*)

**with\_traceback** ()  
Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.InvalidEdge (\*args)  
Proxy of C++ pyAgrum.InvalidEdge class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack  
**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content  
**Return type** str

**errorType** (*GumException self*)

**Returns** the error type  
**Return type** str

**what** (*GumException self*)

**with\_traceback** ()  
Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.InvalidNode (\*args)  
Proxy of C++ pyAgrum.InvalidNode class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack  
**Return type** str

---

```
errorContent (GumException self)
    Returns the error content
    Return type str

errorType (GumException self)
    Returns the error type
    Return type str

what (GumException self)
with_traceback ()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pyAgrum.NoChild (*args)
    Proxy of C++ pyAgrum.NoChild class.

errorCallStack (GumException self)
    Returns the error call stack
    Return type str

errorContent (GumException self)
    Returns the error content
    Return type str

errorType (GumException self)
    Returns the error type
    Return type str

what (GumException self)
with_traceback ()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pyAgrum.NoNeighbour (*args)
    Proxy of C++ pyAgrum.NoNeighbour class.

errorCallStack (GumException self)
    Returns the error call stack
    Return type str

errorContent (GumException self)
    Returns the error content
    Return type str

errorType (GumException self)
    Returns the error type
    Return type str

what (GumException self)
with_traceback ()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pyAgrum.NoParent (*args)
    Proxy of C++ pyAgrum.NoParent class.

errorCallStack (GumException self)
    Returns the error call stack
```

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.NotFound (\*args)

Proxy of C++ pyAgrum.NotFound class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.NullElement (\*args)

Proxy of C++ pyAgrum.NullElement class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.OperationNotAllowed (\*args)

Proxy of C++ pyAgrum.OperationNotAllowed class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack  
**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content  
**Return type** str

**errorType** (*GumException self*)

**Returns** the error type  
**Return type** str

**what** (*GumException self*)

**with\_traceback** ()  
Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.**OutOfBounds** (\*args)  
Proxy of C++ pyAgrum.OutOfBounds class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack  
**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content  
**Return type** str

**errorType** (*GumException self*)

**Returns** the error type  
**Return type** str

**what** (*GumException self*)

**with\_traceback** ()  
Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.**OutOfLowerBound** (\*args)  
Proxy of C++ pyAgrum.OutOfLowerBound class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack  
**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content  
**Return type** str

**errorType** (*GumException self*)

**Returns** the error type  
**Return type** str

**what** (*GumException self*)

**with\_traceback** ()  
Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.**OutOfUpperBound** (\*args)  
Proxy of C++ pyAgrum.OutOfUpperBound class.

```
errorCallStack (GumException self)
    Returns the error call stack
    Return type str

errorContent (GumException self)
    Returns the error content
    Return type str

errorType (GumException self)
    Returns the error type
    Return type str

what (GumException self)
with_traceback ()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pyAgrum.ReferenceError (*args)
    Proxy of C++ pyAgrum.ReferenceError class.

errorCallStack (GumException self)
    Returns the error call stack
    Return type str

errorContent (GumException self)
    Returns the error content
    Return type str

errorType (GumException self)
    Returns the error type
    Return type str

what (GumException self)
with_traceback ()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.

exception pyAgrum.SizeType (*args)
    Proxy of C++ intError class.

errorCallStack (GumException self)
    Returns the error call stack
    Return type str

errorContent (GumException self)
    Returns the error content
    Return type str

errorType (GumException self)
    Returns the error type
    Return type str

what (GumException self)
with_traceback ()
    Exception.with_traceback(tb) – set self.__traceback__ to tb and return self.
```

---

```
exception pyAgrum.SyntaxError(*args)
```

Proxy of C++ pyAgrum.SyntaxError class.

```
col (SyntaxError self)
```

**Returns** the indice of the colonne of the error

**Return type** int

```
errorCallStack (GumException self)
```

**Returns** the error call stack

**Return type** str

```
errorContent (GumException self)
```

**Returns** the error content

**Return type** str

```
errorType (GumException self)
```

**Returns** the error type

**Return type** str

```
line (SyntaxError self)
```

**Returns** the indice of the line of the error

**Return type** int

```
what (GumException self)
```

```
with_traceback ()
```

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

---

```
exception pyAgrum.UndefinedElement(*args)
```

Proxy of C++ pyAgrum.UndefinedElement class.

```
errorCallStack (GumException self)
```

**Returns** the error call stack

**Return type** str

```
errorContent (GumException self)
```

**Returns** the error content

**Return type** str

```
errorType (GumException self)
```

**Returns** the error type

**Return type** str

```
what (GumException self)
```

```
with_traceback ()
```

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

---

```
exception pyAgrum.UndefinedIteratorKey(*args)
```

Proxy of C++ pyAgrum.UndefinedIteratorKey class.

```
errorCallStack (GumException self)
```

**Returns** the error call stack

**Return type** str

```
errorContent (GumException self)
```

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.UndefinedIteratorValue (\*args)

Proxy of C++ pyAgrum.UndefinedIteratorValue class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

**exception** pyAgrum.UnknownLabelInDatabase (\*args)

Proxy of C++ pyAgrum.UnknownLabelInDatabase class.

**errorCallStack** (*GumException self*)

**Returns** the error call stack

**Return type** str

**errorContent** (*GumException self*)

**Returns** the error content

**Return type** str

**errorType** (*GumException self*)

**Returns** the error type

**Return type** str

**what** (*GumException self*)

**with\_traceback** ()

Exception.with\_traceback(tb) – set self.\_\_traceback\_\_ to tb and return self.

# CHAPTER 17

---

## Indices and tables

---

- genindex
- modindex
- search



---

## Python Module Index

---

### p

`pyAgrum.causal.notebook`, 190  
`pyAgrum.lib.bn2graph`, 171  
`pyAgrum.lib.notebook`, 159



### A

about () (*in module pyAgrum*), 219  
abs () (*pyAgrum.Potential method*), 151  
add () (*pyAgrum.BayesNet method*), 4  
add () (*pyAgrum.InfluenceDiagram method*), 211  
add () (*pyAgrum.Instantiation method*), 146  
add () (*pyAgrum.Potential method*), 151  
addAllTargets () (*pyAgrum.GibbsSampling method*), 57  
addAllTargets () (*pyAgrum.ImportanceSampling method*), 76  
addAllTargets () (*pyAgrum.LazyPropagation method*), 32  
addAllTargets () (*pyAgrum.LoopyBeliefPropagation method*), 51  
addAllTargets () (*pyAgrum.LoopyGibbsSampling method*), 82  
addAllTargets () (*pyAgrum.LoopyImportanceSampling method*), 100  
addAllTargets () (*pyAgrum.LoopyMonteCarloSampling method*), 88  
addAllTargets () (*pyAgrum.LoopyWeightedSampling method*), 94  
addAllTargets () (*pyAgrum.MonteCarloSampling method*), 63  
addAllTargets () (*pyAgrum.ShaferShenoyInference method*), 38  
addAllTargets () (*pyAgrum.VariableElimination method*), 45  
addAllTargets () (*pyAgrum.WeightedSampling method*), 70  
addAMPLITUDE () (*pyAgrum.BayesNet method*), 4  
addAND () (*pyAgrum.BayesNet method*), 4  
addArc () (*pyAgrum.BayesNet method*), 4  
addArc () (*pyAgrum.CredalNet method*), 199  
addArc () (*pyAgrum.DAG method*), 119  
addArc () (*pyAgrum.DiGraph method*), 117  
addArc () (*pyAgrum.InfluenceDiagram method*), 211  
addArc () (*pyAgrum.MixedGraph method*), 128  
addChanceNode () (*pyAgrum.InfluenceDiagram method*), 212  
addCOUNT () (*pyAgrum.BayesNet method*), 5  
addDecisionNode () (*pyAgrum.InfluenceDiagram method*), 212  
addEdge () (*pyAgrum.CliqueGraph method*), 124  
addEdge () (*pyAgrum.MixedGraph method*), 128  
addEdge () (*pyAgrum.UndiGraph method*), 122  
addEvidence () (*pyAgrum.GibbsSampling method*), 57  
addEvidence () (*pyAgrum.ImportanceSampling method*), 76  
addEvidence () (*pyAgrum.LazyPropagation method*), 32  
addEvidence () (*pyAgrum.LoopyBeliefPropagation method*), 51  
addEvidence () (*pyAgrum.LoopyGibbsSampling method*), 82  
addEvidence () (*pyAgrum.LoopyImportanceSampling method*), 100  
addEvidence () (*pyAgrum.LoopyMonteCarloSampling method*), 88  
addEvidence () (*pyAgrum.LoopyWeightedSampling method*), 94  
addEvidence () (*pyAgrum.MonteCarloSampling method*), 63  
addEvidence () (*pyAgrum.ShaferShenoyInference method*), 39  
addEvidence () (*pyAgrum.VariableElimination method*), 45  
addEvidence () (*pyAgrum.WeightedSampling method*), 70  
addEXISTS () (*pyAgrum.BayesNet method*), 5  
addFORALL () (*pyAgrum.BayesNet method*), 5  
addForbiddenArc () (*pyAgrum.BNLearnert method*), 107  
addJointTarget () (*pyAgrum.LazyPropagation method*), 32  
addJointTarget () (*pyAgrum.ShaferShenoyInference method*),

39  
 addJointTarget() (*pyAgrum.VariableElimination method*), 45  
 addLabel() (*pyAgrum.LabelizedVariable method*), 136  
 addLogit() (*pyAgrum.BayesNet method*), 5  
 addMandatoryArc() (*pyAgrum.BNLearnert method*), 107  
 addMAX() (*pyAgrum.BayesNet method*), 5  
 addMEDIAN() (*pyAgrum.BayesNet method*), 6  
 addMIN() (*pyAgrum.BayesNet method*), 6  
 addNode() (*pyAgrum.CliqueGraph method*), 124  
 addNode() (*pyAgrum.DAG method*), 119  
 addNode() (*pyAgrum.DiGraph method*), 117  
 addNode() (*pyAgrum.MixedGraph method*), 128  
 addNode() (*pyAgrum.UndiGraph method*), 122  
 addNodes() (*pyAgrum.CliqueGraph method*), 124  
 addNodes() (*pyAgrum.DAG method*), 120  
 addNodes() (*pyAgrum.DiGraph method*), 117  
 addNodes() (*pyAgrum.MixedGraph method*), 128  
 addNodes() (*pyAgrum.UndiGraph method*), 122  
 addNodeWithId() (*pyAgrum.CliqueGraph method*), 124  
 addNodeWithId() (*pyAgrum.DAG method*), 120  
 addNodeWithId() (*pyAgrum.DiGraph method*), 117  
 addNodeWithId() (*pyAgrum.MixedGraph method*), 128  
 addNodeWithId() (*pyAgrum.UndiGraph method*), 122  
 addNoisyAND() (*pyAgrum.BayesNet method*), 6  
 addNoisyOR() (*pyAgrum.BayesNet method*), 6  
 addNoisyORCompound() (*pyAgrum.BayesNet method*), 6  
 addNoisyORNet() (*pyAgrum.BayesNet method*), 7  
 addOR() (*pyAgrum.BayesNet method*), 7  
 addPossibleEdge() (*pyAgrum.BNLearnert method*), 107  
 addStructureListener() (*pyAgrum.BayesNet method*), 7  
 addStructureListener() (*pyAgrum.BayesNetFragment method*), 25  
 addTarget() (*pyAgrum.GibbsSampling method*), 57  
 addTarget() (*pyAgrum.ImportanceSampling method*), 76  
 addTarget() (*pyAgrum.LazyPropagation method*), 32  
 addTarget() (*pyAgrum.LoopyBeliefPropagation method*), 51  
 addTarget() (*pyAgrum.LoopyGibbsSampling method*), 82  
 addTarget() (*pyAgrum.LoopyImportanceSampling method*), 101  
 addTarget() (*pyAgrum.LoopyMonteCarloSampling method*), 89  
 addTarget() (*pyAgrum.LoopyWeightedSampling method*), 95  
 addTarget() (*pyAgrum.MonteCarloSampling method*), 64  
 addTarget() (*pyAgrum.ShaferShenoyInference method*), 39  
 addTarget() (*pyAgrum.VariableElimination method*), 45  
 addTarget() (*pyAgrum.WeightedSampling method*), 70  
 addTick() (*pyAgrum.DiscretizedVariable method*), 138  
 addToClique() (*pyAgrum.CliqueGraph method*), 124  
 addUtilityNode() (*pyAgrum.InfluenceDiagram method*), 212  
 addVariable() (*pyAgrum.CredalNet method*), 199  
 addWeightedArc() (*pyAgrum.BayesNet method*), 8  
 aggType (*pyAgrum.PRMexplorer attribute*), 193  
 animApproximationScheme() (*in module pyAgrum.lib.notebook*), 159, 169  
 approximatedBinarization() (*pyAgrum.CredalNet method*), 200  
 Arc (*class in pyAgrum*), 115  
 arcs() (*pyAgrum.BayesNet method*), 8  
 arcs() (*pyAgrum.BayesNetFragment method*), 25  
 arcs() (*pyAgrum.DAG method*), 120  
 arcs() (*pyAgrum.DiGraph method*), 117  
 arcs() (*pyAgrum.EssentialGraph method*), 22  
 arcs() (*pyAgrum.InfluenceDiagram method*), 213  
 arcs() (*pyAgrum.MarkovBlanket method*), 24  
 arcs() (*pyAgrum.MixedGraph method*), 128  
 argmax() (*pyAgrum.Potential method*), 151  
 argmin() (*pyAgrum.Potential method*), 151  
 ASTBinaryOp (*class in pyAgrum.causal*), 187  
 ASTdiv (*class in pyAgrum.causal*), 188  
 ASTjointProba (*class in pyAgrum.causal*), 189  
 ASTminus (*class in pyAgrum.causal*), 188  
 ASTmult (*class in pyAgrum.causal*), 188  
 ASTplus (*class in pyAgrum.causal*), 187  
 ASTposteriorProba (*class in pyAgrum.causal*), 189  
 ASTsum (*class in pyAgrum.causal*), 189  
 ASTtree (*class in pyAgrum.causal*), 186  
 availableBNExts() (*in module pyAgrum*), 220

## B

BayesNet (*class in pyAgrum*), 3  
 BayesNetFragment (*class in pyAgrum*), 25  
 beginTopologyTransformation() (*pyAgrum.BayesNet method*), 8  
 belongs() (*pyAgrum.RangeVariable method*), 141  
 binaryJoinTree() (*pyAgrum.JunctionTreeGenerator method*), 21  
 bn (*pyAgrum.causal.ASTposteriorProba attribute*), 190  
 BN() (*pyAgrum.GibbsSampling method*), 57

BN () (*pyAgrum.ImportanceSampling method*), 75  
BN () (*pyAgrum.LazyPropagation method*), 31  
BN () (*pyAgrum.LoopyBeliefPropagation method*), 51  
BN () (*pyAgrum.LoopyGibbsSampling method*), 81  
BN () (*pyAgrum.LoopyImportanceSampling method*), 100  
BN () (*pyAgrum.LoopyMonteCarloSampling method*), 88  
BN () (*pyAgrum.LoopyWeightedSampling method*), 94  
BN () (*pyAgrum.MonteCarloSampling method*), 63  
BN () (*pyAgrum.ShaferShenoyInference method*), 38  
BN () (*pyAgrum.VariableElimination method*), 44  
BN () (*pyAgrum.WeightedSampling method*), 69  
BN2dot () (*in module pyAgrum.lib.bn2graph*), 171, 173  
BNDatabaseGenerator (*class in pyAgrum*), 17  
BNinference2dot () (*in module pyAgrum.lib.bn2graph*), 171, 173  
BNLearner (*class in pyAgrum*), 106  
bnToCredal () (*pyAgrum.CredalNet method*), 200  
burnIn () (*pyAgrum.GibbsBNDistance method*), 18  
burnIn () (*pyAgrum.GibbsSampling method*), 58  
burnIn () (*pyAgrum.LoopyGibbsSampling method*), 82

## C

causalBN () (*pyAgrum.causal.CausalModel method*), 184  
CausalFormula (*class in pyAgrum.causal*), 184  
causalImpact () (*in module pyAgrum.causal*), 185  
CausalModel (*class in pyAgrum.causal*), 183  
chanceNodeSize () (*pyAgrum.InfluenceDiagram method*), 213  
changeLabel () (*pyAgrum.LabelizedVariable method*), 136  
changePotential () (*pyAgrum.BayesNet method*), 8  
changeVariableLabel () (*pyAgrum.BayesNet method*), 8  
changeVariableName () (*pyAgrum.BayesNet method*), 8  
changeVariableName () (*pyAgrum.InfluenceDiagram method*), 213  
checkConsistency () (*pyAgrum.BayesNetFragment method*), 25  
chgEvidence () (*pyAgrum.GibbsSampling method*), 58  
chgEvidence () (*pyAgrum.ImportanceSampling method*), 76  
chgEvidence () (*pyAgrum.LazyPropagation method*), 32  
chgEvidence () (*pyAgrum.LoopyBeliefPropagation method*), 52  
chgEvidence () (*pyAgrum.LoopyGibbsSampling method*), 82  
chgEvidence () (*pyAgrum.LoopyImportanceSampling method*), 101

chgEvidence () (*pyAgrum.LoopyMonteCarloSampling method*), 89  
chgEvidence () (*pyAgrum.LoopyWeightedSampling method*), 95  
chgEvidence () (*pyAgrum.MonteCarloSampling method*), 64  
chgEvidence () (*pyAgrum.ShaferShenoyInference method*), 39  
chgEvidence () (*pyAgrum.VariableElimination method*), 46  
chgEvidence () (*pyAgrum.WeightedSampling method*), 70  
chgVal () (*pyAgrum.Instantiation method*), 146  
chi2 () (*pyAgrum.BNLearner method*), 107  
children () (*pyAgrum.BayesNet method*), 9  
children () (*pyAgrum.BayesNetFragment method*), 26  
children () (*pyAgrum.causal.CausalModel method*), 184  
children () (*pyAgrum.DAG method*), 120  
children () (*pyAgrum.DiGraph method*), 117  
children () (*pyAgrum.EssentialGraph method*), 23  
children () (*pyAgrum.InfluenceDiagram method*), 213  
children () (*pyAgrum.MarkovBlanket method*), 24  
children () (*pyAgrum.MixedGraph method*), 129  
classAggregates () (*pyAgrum.PRMexplorer method*), 193  
classAttributes () (*pyAgrum.PRMexplorer method*), 193  
classDag () (*pyAgrum.PRMexplorer method*), 193  
classes () (*pyAgrum.PRMexplorer method*), 194  
classImplements () (*pyAgrum.PRMexplorer method*), 193  
classParameters () (*pyAgrum.PRMexplorer method*), 194  
classReferences () (*pyAgrum.PRMexplorer method*), 194  
classSlotChains () (*pyAgrum.PRMexplorer method*), 194  
clear () (*pyAgrum.BayesNet method*), 9  
clear () (*pyAgrum.CliqueGraph method*), 125  
clear () (*pyAgrum.DAG method*), 120  
clear () (*pyAgrum.DiGraph method*), 117  
clear () (*pyAgrum.Instantiation method*), 147  
clear () (*pyAgrum.MixedGraph method*), 129  
clear () (*pyAgrum.UndiGraph method*), 122  
clearEdges () (*pyAgrum.CliqueGraph method*), 125  
clique () (*pyAgrum.CliqueGraph method*), 125  
CliqueGraph (*class in pyAgrum*), 124  
cm (*pyAgrum.causal.CausalFormula attribute*), 184  
CNLoopyPropagation (*class in pyAgrum*), 206  
CNMonteCarloSampling (*class in pyAgrum*), 204  
col () (*pyAgrum.SyntaxError method*), 237  
completeInstantiation () (*pyAgrum.BayesNet*

method), 9	
completeInstantiation()	(pyA-
grum.BayesNetFragment method), 26	
completeInstantiation()	(pyA-
grum.InfluenceDiagram method), 213	
compute() (pyAgrum.ExactBNdistance method), 18	
compute() (pyAgrum.GibbsBNdistance method), 18	
computeCPTMinMax() (pyAgrum.CredalNet	
method), 200	
configuration() (in module pyA-	
grum.lib.notebook), 159, 165	
connectedComponents() (pyAgrum.BayesNet	
method), 9	
connectedComponents() (pyA-	
grum.BayesNetFragment method), 26	
connectedComponents() (pyA-	
grum.CliqueGraph method), 125	
connectedComponents() (pyAgrum.DAG	
method), 120	
connectedComponents() (pyAgrum.DiGraph	
method), 117	
connectedComponents() (pyA-	
grum.EssentialGraph method), 23	
connectedComponents() (pyAgrum.MixedGraph	
method), 129	
connectedComponents() (pyAgrum.UndiGraph	
method), 122	
container() (pyAgrum.CliqueGraph method), 125	
containerPath() (pyAgrum.CliqueGraph	
method), 125	
contains() (pyAgrum.Instantiation method), 147	
contains() (pyAgrum.Potential method), 151	
continueApproximationScheme() (pyA-	
grum.GibbsBNdistance method), 18	
copy() (pyAgrum.causal.ASTBinaryOp method), 187	
copy() (pyAgrum.causal.ASTdiv method), 188	
copy() (pyAgrum.causal.ASTjointProba method),	
189	
copy() (pyAgrum.causal.ASTminus method), 188	
copy() (pyAgrum.causal.ASTMult method), 188	
copy() (pyAgrum.causal.ASTplus method), 187	
copy() (pyAgrum.causal.ASTposteriorProba	
method), 190	
copy() (pyAgrum.causal.ASTsum method), 189	
copy() (pyAgrum.causal.ASTtree method), 186	
copy() (pyAgrum.causal.CausalFormula method),	
184	
cpf() (pyAgrum.PRMexplorer method), 194	
cpt() (pyAgrum.BayesNet method), 9	
cpt() (pyAgrum.BayesNetFragment method), 26	
cpt() (pyAgrum.InfluenceDiagram method), 213	
CredalNet (class in pyAgrum), 199	
credalNet_currentCpt() (pyAgrum.CredalNet	
method), 200	
credalNet_srcCpt() (pyAgrum.CredalNet	
method), 200	
current_bn() (pyAgrum.CredalNet method), 201	
currentNodeType() (pyAgrum.CredalNet	
method), 200	
currentPosterior() (pyAgrum.GibbsSampling	
method), 58	
currentPosterior() (pyA-	
grum.ImportanceSampling method), 77	
currentPosterior() (pyA-	
grum.LoopGibbsSampling method), 83	
currentPosterior() (pyA-	
grum.LoopImportanceSampling method),	
102	
currentPosterior() (pyA-	
grum.LoopMonteCarloSampling	
method), 89	
currentPosterior() (pyA-	
grum.LoopWeightedSampling	
method), 95	
currentPosterior() (pyA-	
grum.MonteCarloSampling method), 65	
currentPosterior() (pyA-	
grum.WeightedSampling method), 71	
currentTime() (pyAgrum.BNlearner method),	
108	
currentTime() (pyAgrum.CNLoopPropagati	
method), 207	
currentTime() (pyA-	
grum.CNMonteCarloSampling	
method), 204	
currentTime() (pyAgrum.GibbsBNdistance	
method), 18	
currentTime() (pyAgrum.GibbsSampling	
method), 58	
currentTime() (pyAgrum.ImportanceSampling	
method), 77	
currentTime() (pyAgrum.LoopBeliefPropaga	
method), 52	
currentTime() (pyAgrum.LoopGibbsSampling	
method), 83	
currentTime() (pyA-	
grum.LoopImportanceSampling	
method), 102	
currentTime() (pyA-	
grum.LoopMonteCarloSampling	
method), 90	
currentTime() (pyA-	
grum.LoopWeightedSampling	
method), 96	
currentTime() (pyAgrum.MonteCarloSampling	
method), 65	
currentTime() (pyAgrum.WeightedSampling	
method), 71	

D

DAG (*class in pyAgrum*), 119  
dag () (*pyAgrum.BayesNet method*), 9  
dag () (*pyAgrum.BayesNetFragment method*), 26  
dag () (*pyAgrum.InfluenceDiagram method*), 213

dag() (*pyAgrum.MarkovBlanket method*), 24  
 database() (*pyAgrum.BNDatabaseGenerator method*), 17  
 databaseWeight() (*pyAgrum.BNLearner method*), 108  
 dec() (*pyAgrum.Instantiation method*), 147  
 decIn() (*pyAgrum.Instantiation method*), 147  
 decisionNodeSize() (*pyAgrum.InfluenceDiagram method*), 213  
 decisionOrderExists() (*pyAgrum.InfluenceDiagram method*), 214  
 decNotVar() (*pyAgrum.Instantiation method*), 147  
 decOut() (*pyAgrum.Instantiation method*), 147  
 decVar() (*pyAgrum.Instantiation method*), 147  
 DefaultInLabel, 227  
 description() (*pyAgrum.DiscreteVariable method*), 133  
 description() (*pyAgrum.DiscretizedVariable method*), 138  
 description() (*pyAgrum.LabelizedVariable method*), 136  
 description() (*pyAgrum.RangeVariable method*), 141  
 DiGraph (*class in pyAgrum*), 116  
 dim() (*pyAgrum.BayesNet method*), 10  
 dim() (*pyAgrum.BayesNetFragment method*), 26  
 disableEpsilon() (*pyAgrum.GibbsBNdistance method*), 19  
 disableMaxIter() (*pyAgrum.GibbsBNdistance method*), 19  
 disableMaxTime() (*pyAgrum.GibbsBNdistance method*), 19  
 disableMinEpsilonRate() (*pyAgrum.GibbsBNdistance method*), 19  
 DiscreteVariable (*class in pyAgrum*), 133  
 DiscretizedVariable (*class in pyAgrum*), 138  
 displayResult() (*pyAgrum.InfluenceDiagramInference method*), 217  
 displayStrongJunctionTree() (*pyAgrum.InfluenceDiagramInference method*), 217  
 doCalculusWithObservation() (*in module pyAgrum.causal*), 185  
 domain() (*pyAgrum.DiscreteVariable method*), 133  
 domain() (*pyAgrum.DiscretizedVariable method*), 138  
 domain() (*pyAgrum.LabelizedVariable method*), 136  
 domain() (*pyAgrum.RangeVariable method*), 141  
 domainSize() (*pyAgrum.CredalNet method*), 201  
 domainSize() (*pyAgrum.DiscreteVariable method*), 133  
 domainSize() (*pyAgrum.DiscretizedVariable method*), 138  
 domainSize() (*pyAgrum.Instantiation method*), 147  
 domainSize() (*pyAgrum.LabelizedVariable method*), 136  
 domainSize() (*pyAgrum.RangeVariable method*), 141  
 dotize() (*in module pyAgrum.lib.bn2graph*), 172, 174  
 draw() (*pyAgrum.Potential method*), 151  
 drawSamples() (*pyAgrum.BNDatabaseGenerator method*), 17  
 DuplicateElement, 227  
 DuplicateLabel, 228  
 dynamicExpMax() (*pyAgrum.CNLoopyPropagation method*), 207  
 dynamicExpMax() (*pyAgrum.CNMonteCarloSampling method*), 204  
 dynamicExpMin() (*pyAgrum.CNLoopyPropagation method*), 207  
 dynamicExpMin() (*pyAgrum.CNMonteCarloSampling method*), 204

## E

Edge (*class in pyAgrum*), 116  
 edges() (*pyAgrum.CliqueGraph method*), 125  
 edges() (*pyAgrum.EssentialGraph method*), 23  
 edges() (*pyAgrum.MixedGraph method*), 129  
 edges() (*pyAgrum.UndiGraph method*), 122  
 eliminationOrder() (*pyAgrum.JunctionTreeGenerator method*), 22  
 empty() (*pyAgrum.BayesNet method*), 10  
 empty() (*pyAgrum.BayesNetFragment method*), 27  
 empty() (*pyAgrum.CliqueGraph method*), 126  
 empty() (*pyAgrum.DAG method*), 120  
 empty() (*pyAgrum.DiGraph method*), 117  
 empty() (*pyAgrum.DiscreteVariable method*), 133  
 empty() (*pyAgrum.DiscretizedVariable method*), 139  
 empty() (*pyAgrum.InfluenceDiagram method*), 214  
 empty() (*pyAgrum.Instantiation method*), 147  
 empty() (*pyAgrum.LabelizedVariable method*), 136  
 empty() (*pyAgrum.MixedGraph method*), 129  
 empty() (*pyAgrum.Potential method*), 151  
 empty() (*pyAgrum.RangeVariable method*), 141  
 empty() (*pyAgrum.UndiGraph method*), 122  
 emptyArcs() (*pyAgrum.DAG method*), 120  
 emptyArcs() (*pyAgrum.DiGraph method*), 118  
 emptyArcs() (*pyAgrum.MixedGraph method*), 129  
 EmptyBSTree, 228  
 emptyEdges() (*pyAgrum.CliqueGraph method*), 126  
 emptyEdges() (*pyAgrum.MixedGraph method*), 129  
 emptyEdges() (*pyAgrum.UndiGraph method*), 123  
 EmptySet, 228  
 enableEpsilon() (*pyAgrum.GibbsBNdistance method*), 19

enableMaxIter ()	( <i>pyAgrum.GibbsBNdistance method</i> ), 19		102
enableMaxTime ()	( <i>pyAgrum.GibbsBNdistance method</i> ), 19	eraseAllEvidence ()	( <i>pyAgrum.LoopyMonteCarloSampling method</i> ), 90
enableMinEpsilonRate ()	( <i>pyAgrum.GibbsBNdistance method</i> ), 19	eraseAllEvidence ()	( <i>pyAgrum.LoopyWeightedSampling method</i> ), 96
end ()	( <i>pyAgrum.Instantiation method</i> ), 147	eraseAllEvidence ()	( <i>pyAgrum.MonteCarloSampling method</i> ), 65
endTopologyTransformation ()	( <i>pyAgrum.BayesNet method</i> ), 10	eraseAllEvidence ()	( <i>pyAgrum.ShaferShenoyInference method</i> ), 40
entropy ()	( <i>pyAgrum.Potential method</i> ), 151	eraseAllEvidence ()	( <i>pyAgrum.VariableElimination method</i> ), 46
epsilon ()	( <i>pyAgrum.BNLearn method</i> ), 108	eraseAllEvidence ()	( <i>pyAgrum.WeightedSampling method</i> ), 71
epsilon ()	( <i>pyAgrum.CNLoopyPropagation method</i> ), 207	eraseAllJointTargets ()	( <i>pyAgrum.LazyPropagation method</i> ), 33
epsilon ()	( <i>pyAgrum.CNMonteCarloSampling method</i> ), 205	eraseAllJointTargets ()	( <i>pyAgrum.ShaferShenoyInference method</i> ), 40
epsilon ()	( <i>pyAgrum.GibbsBNdistance method</i> ), 19	eraseAllMarginalTargets ()	( <i>pyAgrum.LazyPropagation method</i> ), 33
epsilon ()	( <i>pyAgrum.GibbsSampling method</i> ), 58	eraseAllMarginalTargets ()	( <i>pyAgrum.ShaferShenoyInference method</i> ), 40
epsilon ()	( <i>pyAgrum.ImportanceSampling method</i> ), 77	eraseAllTargets ()	( <i>pyAgrum.GibbsSampling method</i> ), 59
epsilon ()	( <i>pyAgrum.LoopyBeliefPropagation method</i> ), 52	eraseAllTargets ()	( <i>pyAgrum.ImportanceSampling method</i> ), 77
epsilon ()	( <i>pyAgrum.LoopyGibbsSampling method</i> ), 83	eraseAllTargets ()	( <i>pyAgrum.LazyPropagation method</i> ), 33
epsilon ()	( <i>pyAgrum.LoopyImportanceSampling method</i> ), 102	eraseAllTargets ()	( <i>pyAgrum.LoopyBeliefPropagation method</i> ), 52
epsilon ()	( <i>pyAgrum.LoopyMonteCarloSampling method</i> ), 90	eraseAllTargets ()	( <i>pyAgrum.LoopyGibbsSampling method</i> ), 83
epsilon ()	( <i>pyAgrum.LoopyWeightedSampling method</i> ), 96	eraseAllTargets ()	( <i>pyAgrum.LoopyImportanceSampling method</i> ), 102
epsilon ()	( <i>pyAgrum.MonteCarloSampling method</i> ), 65	eraseAllTargets ()	( <i>pyAgrum.LoopyMonteCarloSampling method</i> ), 90
epsilon ()	( <i>pyAgrum.WeightedSampling method</i> ), 71	eraseAllTargets ()	( <i>pyAgrum.LoopyWeightedSampling method</i> ), 96
epsilonMax ()	( <i>pyAgrum.CredalNet method</i> ), 201	eraseAllTargets ()	( <i>pyAgrum.MonteCarloSampling method</i> ), 65
epsilonMean ()	( <i>pyAgrum.CredalNet method</i> ), 201	eraseAllTargets ()	( <i>pyAgrum.ShaferShenoyInference method</i> ), 40
epsilonMin ()	( <i>pyAgrum.CredalNet method</i> ), 201	eraseAllTargets ()	( <i>pyAgrum.VariableElimination method</i> ), 46
erase ()	( <i>pyAgrum.BayesNet method</i> ), 10	eraseArc ()	( <i>pyAgrum.BayesNet method</i> ), 10
erase ()	( <i>pyAgrum.InfluenceDiagram method</i> ), 214	eraseArc ()	( <i>pyAgrum.DAG method</i> ), 120
erase ()	( <i>pyAgrum.Instantiation method</i> ), 148	eraseArc ()	( <i>pyAgrum.DiGraph method</i> ), 118
eraseAllEvidence ()	( <i>pyAgrum.CNLoopyPropagation method</i> ), 207		
eraseAllEvidence ()	( <i>pyAgrum.GibbsSampling method</i> ), 58		
eraseAllEvidence ()	( <i>pyAgrum.ImportanceSampling method</i> ), 77		
eraseAllEvidence ()	( <i>pyAgrum.InfluenceDiagramInference method</i> ), 217		
eraseAllEvidence ()	( <i>pyAgrum.LazyPropagation method</i> ), 33		
eraseAllEvidence ()	( <i>pyAgrum.LoopyBeliefPropagation method</i> ), 52		
eraseAllEvidence ()	( <i>pyAgrum.LoopyGibbsSampling method</i> ), 83		
eraseAllEvidence ()	( <i>pyAgrum.LoopyImportanceSampling method</i> ),		

eraseArc() (*pyAgrum.InfluenceDiagram method*), 214  
 eraseArc() (*pyAgrum.MixedGraph method*), 129  
 eraseChildren() (*pyAgrum.DAG method*), 120  
 eraseChildren() (*pyAgrum.DiGraph method*), 118  
 eraseChildren() (*pyAgrum.MixedGraph method*), 129  
 eraseEdge() (*pyAgrum.CliqueGraph method*), 126  
 eraseEdge() (*pyAgrum.MixedGraph method*), 130  
 eraseEdge() (*pyAgrum.UndiGraph method*), 123  
 eraseEvidence() (*pyAgrum.GibbsSampling method*), 59  
 eraseEvidence() (*pyAgrum.ImportanceSampling method*), 77  
 eraseEvidence() (*pyAgrum.InfluenceDiagramInference method*), 217  
 eraseEvidence() (*pyAgrum.LazyPropagation method*), 33  
 eraseEvidence() (*pyAgrum.LoopyBeliefPropagation method*), 52  
 eraseEvidence() (*pyAgrum.LoopyGibbsSampling method*), 83  
 eraseEvidence() (*pyAgrum.LoopyImportanceSampling method*), 102  
 eraseEvidence() (*pyAgrum.LoopyMonteCarloSampling method*), 90  
 eraseEvidence() (*pyAgrum.LoopyWeightedSampling method*), 96  
 eraseEvidence() (*pyAgrum.MonteCarloSampling method*), 65  
 eraseEvidence() (*pyAgrum.ShaferShenoyInference method*), 40  
 eraseEvidence() (*pyAgrum.VariableElimination method*), 46  
 eraseEvidence() (*pyAgrum.WeightedSampling method*), 71  
 eraseForbiddenArc() (*pyAgrum.BNLearnert method*), 108  
 eraseFromClique() (*pyAgrum.CliqueGraph method*), 126  
 eraseJointTarget() (*pyAgrum.LazyPropagation method*), 33  
 eraseJointTarget() (*pyAgrum.ShaferShenoyInference method*), 40  
 eraseJointTarget() (*pyAgrum.VariableElimination method*), 46  
 eraseLabels() (*pyAgrum.LabelizedVariable method*), 136  
 eraseMandatoryArc() (*pyAgrum.BNLearnert method*), 108  
 eraseNeighbours() (*pyAgrum.CliqueGraph method*), 126  
 eraseNeighbours() (*pyAgrum.MixedGraph method*), 130  
 eraseNeighbours() (*pyAgrum.UndiGraph method*), 123  
 eraseNode() (*pyAgrum.CliqueGraph method*), 126  
 eraseNode() (*pyAgrum.DAG method*), 120  
 eraseNode() (*pyAgrum.DiGraph method*), 118  
 eraseNode() (*pyAgrum.MixedGraph method*), 130  
 eraseNode() (*pyAgrum.UndiGraph method*), 123  
 eraseParents() (*pyAgrum.DAG method*), 120  
 eraseParents() (*pyAgrum.DiGraph method*), 118  
 eraseParents() (*pyAgrum.MixedGraph method*), 130  
 erasePossibleEdge() (*pyAgrum.BNLearnert method*), 108  
 eraseTarget() (*pyAgrum.GibbsSampling method*), 59  
 eraseTarget() (*pyAgrum.ImportanceSampling method*), 77  
 eraseTarget() (*pyAgrum.LazyPropagation method*), 33  
 eraseTarget() (*pyAgrum.LoopyBeliefPropagation method*), 53  
 eraseTarget() (*pyAgrum.LoopyGibbsSampling method*), 84  
 eraseTarget() (*pyAgrum.LoopyImportanceSampling method*), 102  
 eraseTarget() (*pyAgrum.LoopyMonteCarloSampling method*), 90  
 eraseTarget() (*pyAgrum.LoopyWeightedSampling method*), 96  
 eraseTarget() (*pyAgrum.MonteCarloSampling method*), 65  
 eraseTarget() (*pyAgrum.ShaferShenoyInference method*), 40  
 eraseTarget() (*pyAgrum.VariableElimination method*), 46  
 eraseTarget() (*pyAgrum.WeightedSampling method*), 71  
 eraseTicks() (*pyAgrum.DiscretizedVariable method*), 139  
 errorCallStack() (*pyAgrum.DefaultInLabel method*), 227  
 errorCallStack() (*pyAgrum.DuplicateElement method*), 227  
 errorCallStack() (*pyAgrum.DuplicateLabel method*), 228  
 errorCallStack() (*pyAgrum.EmptyBSTree method*), 228  
 errorCallStack() (*pyAgrum.EmptySet method*), 228  
 errorCallStack() (*pyAgrum.FatalError method*), 229

errorCallStack() (pyAgrum.FormatNotFound method), 229  
errorCallStack() (pyAgrum.GraphError method), 230  
errorCallStack() (pyAgrum.GumException method), 229  
errorCallStack() (pyAgrum.IdError method), 230  
errorCallStack() (pyAgrum.InvalidArc method), 231  
errorCallStack() (pyAgrum.InvalidArgument method), 231  
errorCallStack() (pyAgrum.InvalidArgumentsNumber method), 231  
errorCallStack() (pyAgrum.InvalidDirectedCycle method), 232  
errorCallStack() (pyAgrum.InvalidEdge method), 232  
errorCallStack() (pyAgrum.InvalidNode method), 232  
errorCallStack() (pyAgrum.IOError method), 230  
errorCallStack() (pyAgrum.NoChild method), 233  
errorCallStack() (pyAgrum.NoNeighbour method), 233  
errorCallStack() (pyAgrum.NoParent method), 233  
errorCallStack() (pyAgrum.NotFound method), 234  
errorCallStack() (pyAgrum.NullElement method), 234  
errorCallStack() (pyAgrum.OperationNotAllowed method), 234  
errorCallStack() (pyAgrum.OutOfBounds method), 235  
errorCallStack() (pyAgrum.OutOfLowerBound method), 235  
errorCallStack() (pyAgrum.OutOfUpperBound method), 235  
errorCallStack() (pyAgrum.ReferenceError method), 236  
errorCallStack() (pyAgrum.SizeError method), 236  
errorCallStack() (pyAgrum.SyntaxException method), 237  
errorCallStack() (pyAgrum.UndefinedElement method), 237  
errorCallStack() (pyAgrum.UndefinedIteratorKey method), 237  
errorCallStack() (pyAgrum.UndefinedIteratorValue method), 238  
errorCallStack() (pyAgrum.UnknownLabelInDatabase method), 238  
errorContent() (pyAgrum.DefaultInLabel method), 227  
errorContent() (pyAgrum.DuplicateElement method), 227  
errorContent() (pyAgrum.DuplicateLabel method), 228  
errorContent() (pyAgrum.EmptyBSTree method), 228  
errorContent() (pyAgrum.EmptySet method), 228  
errorContent() (pyAgrum.FatalError method), 229  
errorContent() (pyAgrum.FormatNotFound method), 229  
errorContent() (pyAgrum.GraphError method), 230  
errorContent() (pyAgrum.GumException method), 229  
errorContent() (pyAgrum.IdError method), 230  
errorContent() (pyAgrum.InvalidArc method), 231  
errorContent() (pyAgrum.InvalidArgument method), 231  
errorContent() (pyAgrum.InvalidArgumentsNumber method), 231  
errorContent() (pyAgrum.InvalidDirectedCycle method), 232  
errorContent() (pyAgrum.InvalidEdge method), 232  
errorContent() (pyAgrum.InvalidNode method), 232  
errorContent() (pyAgrum.IOError method), 230  
errorContent() (pyAgrum.NoChild method), 233  
errorContent() (pyAgrum.NoNeighbour method), 233  
errorContent() (pyAgrum.NoParent method), 234  
errorContent() (pyAgrum.NotFound method), 234  
errorContent() (pyAgrum.NullElement method), 234  
errorContent() (pyAgrum.OperationNotAllowed method), 235  
errorContent() (pyAgrum.OutOfBounds method), 235  
errorContent() (pyAgrum.OutOfLowerBound method), 235  
errorContent() (pyAgrum.OutOfUpperBound method), 236  
errorContent() (pyAgrum.ReferenceError method), 236  
errorContent() (pyAgrum.SizeError method), 236  
errorContent() (pyAgrum.SyntaxException method), 237  
errorContent() (pyAgrum.UndefinedElement method), 237  
errorContent() (pyAgrum.UndefinedIteratorKey method), 237  
errorContent() (pyAgrum.UndefinedIteratorValue method), 238

238  
**errorContent()** (pyAgrum.*UnknownLabelInDatabase method*), 238  
**errorType()** (pyAgrum.*DefaultInLabel method*), 227  
**errorType()** (pyAgrum.*DuplicateElement method*), 227  
**errorType()** (pyAgrum.*DuplicateLabel method*), 228  
**errorType()** (pyAgrum.*EmptyBSTree method*), 228  
**errorType()** (pyAgrum.*EmptySet method*), 228  
**errorType()** (pyAgrum.*FatalError method*), 229  
**errorType()** (pyAgrum.*FormatNotFound method*), 229  
**errorType()** (pyAgrum.*GraphError method*), 230  
**errorType()** (pyAgrum.*GumException method*), 229  
**errorType()** (pyAgrum.*IdError method*), 231  
**errorType()** (pyAgrum.*InvalidArc method*), 231  
**errorType()** (pyAgrum.*InvalidArgument method*), 231  
**errorType()** (pyAgrum.*InvalidArgumentsNumber method*), 232  
**errorType()** (pyAgrum.*InvalidDirectedCycle method*), 232  
**errorType()** (pyAgrum.*InvalidEdge method*), 232  
**errorType()** (pyAgrum.*InvalidNode method*), 233  
**errorType()** (pyAgrum.*IOError method*), 230  
**errorType()** (pyAgrum.*NoChild method*), 233  
**errorType()** (pyAgrum.*NoNeighbour method*), 233  
**errorType()** (pyAgrum.*NoParent method*), 234  
**errorType()** (pyAgrum.*NotFound method*), 234  
**errorType()** (pyAgrum.*NullElement method*), 234  
**errorType()** (pyAgrum.*OperationNotAllowed method*), 235  
**errorType()** (pyAgrum.*OutOfBounds method*), 235  
**errorType()** (pyAgrum.*OutOfLowerBound method*), 235  
**errorType()** (pyAgrum.*OutOfUpperBound method*), 236  
**errorType()** (pyAgrum.*ReferenceError method*), 236  
**errorType()** (pyAgrum.*SizeError method*), 236  
**errorType()** (pyAgrum.*SyntaxError method*), 237  
**errorType()** (pyAgrum.*UndefinedElement method*), 237  
**errorType()** (pyAgrum.*UndefinedIteratorKey method*), 238  
**errorType()** (pyAgrum.*UndefinedIteratorValue method*), 238  
**errorType()** (pyAgrum.*UnknownLabelInDatabase method*), 238  
**EssentialGraph** (*class in pyAgrum*), 22  
**eval()** (pyAgrum.causal.*ASTsum method*), 189  
**eval()** (pyAgrum.causal.*CausalFormula method*), 185  
**evidenceImpact()** (pyAgrum.*GibbsSampling method*), 59  
**evidenceImpact()** (pyAgrum.*ImportanceSampling method*), 78  
**evidenceImpact()** (pyAgrum.*LazyPropagation method*), 34  
**evidenceImpact()** (pyAgrum.*LoopyBeliefPropagation method*), 53  
**evidenceImpact()** (pyAgrum.*LoopyGibbsSampling method*), 84  
**evidenceImpact()** (pyAgrum.*LoopyImportanceSampling method*), 102  
**evidenceImpact()** (pyAgrum.*LoopyMonteCarloSampling method*), 90  
**evidenceImpact()** (pyAgrum.*LoopyWeightedSampling method*), 96  
**evidenceImpact()** (pyAgrum.*MonteCarloSampling method*), 65  
**evidenceImpact()** (pyAgrum.*ShaferShenoyInference method*), 40  
**evidenceImpact()** (pyAgrum.*VariableElimination method*), 47  
**evidenceImpact()** (pyAgrum.*WeightedSampling method*), 72  
**evidenceJointImpact()** (pyAgrum.*LazyPropagation method*), 34  
**evidenceJointImpact()** (pyAgrum.*ShaferShenoyInference method*), 41  
**evidenceJointImpact()** (pyAgrum.*VariableElimination method*), 47  
**evidenceProbability()** (pyAgrum.*LazyPropagation method*), 34  
**evidenceProbability()** (pyAgrum.*ShaferShenoyInference method*), 41  
**ExactBNdistance** (*class in pyAgrum*), 17  
**existsArc()** (pyAgrum.*DAG method*), 121  
**existsArc()** (pyAgrum.*DiGraph method*), 118  
**existsArc()** (pyAgrum.*MixedGraph method*), 130  
**existsEdge()** (pyAgrum.*CliqueGraph method*), 126  
**existsEdge()** (pyAgrum.*MixedGraph method*), 130  
**existsEdge()** (pyAgrum.*UndiGraph method*), 123  
**existsNode()** (pyAgrum.*CliqueGraph method*), 126  
**existsNode()** (pyAgrum.*DAG method*), 121  
**existsNode()** (pyAgrum.*DiGraph method*), 118  
**existsNode()** (pyAgrum.*MixedGraph method*), 130  
**existsNode()** (pyAgrum.*UndiGraph method*), 123  
**existsPathBetween()** (pyAgrum.*InfluenceDiagram method*), 214

`extract()` (*pyAgrum.Potential method*), 152

## F

`fastBN()` (*in module pyAgrum*), 219

`fastPrototype()` (*pyAgrum.BayesNet static method*), 10

`FatalError`, 229

`fill()` (*pyAgrum.Potential method*), 152

`fillConstraint()` (*pyAgrum.CredalNet method*), 201

`fillConstraints()` (*pyAgrum.CredalNet method*), 201

`fillWith()` (*pyAgrum.Potential method*), 152

`fillWithFunction()` (*pyAgrum.Potential method*), 152

`findAll()` (*pyAgrum.Potential method*), 153

`first()` (*pyAgrum.Arc method*), 115

`first()` (*pyAgrum.Edge method*), 116

`forDarkTheme()` (*in module pyAgrum.lib.bn2graph*), 172

`forLightTheme()` (*in module pyAgrum.lib.bn2graph*), 172

`FormatNotFound`, 229

`fromdict()` (*pyAgrum.Instantiation method*), 148

## G

`G2()` (*pyAgrum.BNLearner method*), 107

`generateCPT()` (*pyAgrum.BayesNet method*), 11

`generateCPTs()` (*pyAgrum.BayesNet method*), 11

`get()` (*pyAgrum.Potential method*), 153

`get_CPT_max()` (*pyAgrum.CredalNet method*), 202

`get_CPT_min()` (*pyAgrum.CredalNet method*), 202

`getalltheSystems()` (*pyAgrum.PRMexplorer method*), 195

`getBestDecisionChoice()` (*pyAgrum.InfluenceDiagramInference method*), 217

`getBlackInTheme()` (*in module pyAgrum.lib.bn2graph*), 172

`getBN()` (*in module pyAgrum.lib.notebook*), 159, 166

`getBNDiff()` (*in module pyAgrum.lib.notebook*), 159

`getCausalImpact()` (*in module pyAgrum.causal.notebook*), 190

`getCausalModel()` (*in module pyAgrum.causal.notebook*), 191

`getDecisionGraph()` (*pyAgrum.InfluenceDiagram method*), 214

`getDecisionOrder()` (*pyAgrum.InfluenceDiagram method*), 214

`getDirectSubClass()` (*pyAgrum.PRMexplorer method*), 194

`getDirectSubInterfaces()` (*pyAgrum.PRMexplorer method*), 194

`getDirectSubTypes()` (*pyAgrum.PRMexplorer method*), 195

`getDot()` (*in module pyAgrum.lib.notebook*), 160, 166

`getGraph()` (*in module pyAgrum.lib.notebook*), 160, 166

`getImplementations()` (*pyAgrum.PRMexplorer method*), 195

`getInference()` (*in module pyAgrum.lib.notebook*), 160, 167

`getInferenceEngine()` (*in module pyAgrum.lib.notebook*), 160

`getInfluenceDiagram()` (*in module pyAgrum.lib.notebook*), 161, 169

`getInformation()` (*in module pyAgrum.lib.notebook*), 161, 169

`getJunctionTree()` (*in module pyAgrum.lib.notebook*), 161, 168

`getLabelMap()` (*pyAgrum.PRMexplorer method*), 195

`getLabels()` (*pyAgrum.PRMexplorer method*), 195

`getMaxNumberOfThreads()` (*in module pyAgrum*), 225

`getMEU()` (*pyAgrum.InfluenceDiagramInference method*), 217

`getNumberOfLogicalProcessors()` (*in module pyAgrum*), 225

`getPosterior()` (*in module pyAgrum*), 220

`getPosterior()` (*in module pyAgrum.lib.notebook*), 161, 165

`getPotential()` (*in module pyAgrum.lib.notebook*), 161, 165

`getSideBySide()` (*in module pyAgrum.lib.notebook*), 161

`getSuperClass()` (*pyAgrum.PRMexplorer method*), 195

`getSuperInterface()` (*pyAgrum.PRMexplorer method*), 195

`getSuperType()` (*pyAgrum.PRMexplorer method*), 195

`GibbsBNdistance` (*class in pyAgrum*), 18

`GibbsSampling` (*class in pyAgrum*), 57

`GraphError`, 230

`GumException`, 229

## H

`H()` (*pyAgrum.GibbsSampling method*), 57

`H()` (*pyAgrum.ImportanceSampling method*), 75

`H()` (*pyAgrum.LazyPropagation method*), 31

`H()` (*pyAgrum.LoopyBeliefPropagation method*), 51

`H()` (*pyAgrum.LoopyGibbsSampling method*), 82

`H()` (*pyAgrum.LoopyImportanceSampling method*), 100

`H()` (*pyAgrum.LoopyMonteCarloSampling method*), 88

`H()` (*pyAgrum.LoopyWeightedSampling method*), 94

`H()` (*pyAgrum.MonteCarloSampling method*), 63

`H()` (*pyAgrum.ShaferShenoyInference method*), 38

`H()` (*pyAgrum.VariableElimination method*), 45

`H()` (*pyAgrum.WeightedSampling method*), 69

`hamming()` (*pyAgrum.Instantiation method*), 148

hardEvidenceNodes () (pyAgrum.GibbsSampling method), 59  
 hardEvidenceNodes () (pyAgrum.ImportanceSampling method), 78  
 hardEvidenceNodes () (pyAgrum.LazyPropagation method), 34  
 hardEvidenceNodes () (pyAgrum.LoopyBeliefPropagation method), 53  
 hardEvidenceNodes () (pyAgrum.LoopyGibbsSampling method), 84  
 hardEvidenceNodes () (pyAgrum.LoopyImportanceSampling method), 103  
 hardEvidenceNodes () (pyAgrum.LoopyMonteCarloSampling method), 90  
 hardEvidenceNodes () (pyAgrum.LoopyWeightedSampling method), 97  
 hardEvidenceNodes () (pyAgrum.MonteCarloSampling method), 66  
 hardEvidenceNodes () (pyAgrum.ShaferShenoyInference method), 41  
 hardEvidenceNodes () (pyAgrum.VariableElimination method), 47  
 hardEvidenceNodes () (pyAgrum.WeightedSampling method), 72  
 hasComputedCPTMinMax () (pyAgrum.CredalNet method), 202  
 hasDirectedPath () (pyAgrum.DAG method), 121  
 hasDirectedPath () (pyAgrum.DiGraph method), 118  
 hasDirectedPath () (pyAgrum.MixedGraph method), 130  
 hasEvidence () (pyAgrum.GibbsSampling method), 59  
 hasEvidence () (pyAgrum.ImportanceSampling method), 78  
 hasEvidence () (pyAgrum.LazyPropagation method), 34  
 hasEvidence () (pyAgrum.LoopyBeliefPropagation method), 53  
 hasEvidence () (pyAgrum.LoopyGibbsSampling method), 84  
 hasEvidence () (pyAgrum.LoopyImportanceSampling method), 103  
 hasEvidence () (pyAgrum.LoopyMonteCarloSampling method), 91  
 hasEvidence () (pyAgrum.LoopyWeightedSampling method), 97  
 hasEvidence () (pyAgrum.MonteCarloSampling method), 66  
 hasEvidence () (pyAgrum.ShaferShenoyInference method), 41  
 method), 41  
 hasEvidence () (pyAgrum.VariableElimination method), 47  
 hasEvidence () (pyAgrum.WeightedSampling method), 72  
 hasHardEvidence () (pyAgrum.GibbsSampling method), 60  
 hasHardEvidence () (pyAgrum.ImportanceSampling method), 78  
 hasHardEvidence () (pyAgrum.LazyPropagation method), 34  
 hasHardEvidence () (pyAgrum.LoopyBeliefPropagation method), 53  
 hasHardEvidence () (pyAgrum.LoopyGibbsSampling method), 84  
 hasHardEvidence () (pyAgrum.LoopyImportanceSampling method), 103  
 hasHardEvidence () (pyAgrum.LoopyMonteCarloSampling method), 91  
 hasHardEvidence () (pyAgrum.LoopyWeightedSampling method), 97  
 hasHardEvidence () (pyAgrum.MonteCarloSampling method), 66  
 hasHardEvidence () (pyAgrum.ShaferShenoyInference method), 41  
 hasHardEvidence () (pyAgrum.VariableElimination method), 47  
 hasHardEvidence () (pyAgrum.WeightedSampling method), 72  
 hasMissingValues () (pyAgrum.BNLearn method), 108  
 hasRunningIntersection () (pyAgrum.CliqueGraph method), 126  
 hasSameStructure () (pyAgrum.BayesNet method), 11  
 hasSameStructure () (pyAgrum.BayesNetFragment method), 27  
 hasSameStructure () (pyAgrum.InfluenceDiagram method), 214  
 hasSameStructure () (pyAgrum.MarkovBlanket method), 24  
 hasSoftEvidence () (pyAgrum.GibbsSampling method), 60  
 hasSoftEvidence () (pyAgrum.ImportanceSampling method), 78  
 hasSoftEvidence () (pyAgrum.LazyPropagation method), 35  
 hasSoftEvidence () (pyAgrum.LoopyBeliefPropagation method), 54  
 hasSoftEvidence () (pyAgrum.LoopyGibbsSampling method), 84  
 hasSoftEvidence () (pyAgrum.LoopyImportanceSampling method), 103  
 hasSoftEvidence () (pyAgrum.MonteCarloSampling method), 66  
 hasSoftEvidence () (pyAgrum.ShaferShenoyInference method), 41



*grum.BayesNetFragment method), 27*  
**installNode()** (*pyAgrum.BayesNetFragment method), 27*  
**Instantiation** (*class in pyAgrum*), 146  
**instantiation()** (*pyAgrum.CredalNet method*), 202  
**interAttributes()** (*pyAgrum.PRMexplorer method*), 196  
**interfaces()** (*pyAgrum.PRMexplorer method*), 196  
**interReferences()** (*pyAgrum.PRMexplorer method*), 196  
**intervalToCredal()** (*pyAgrum.CredalNet method*), 202  
**intervalToCredalWithFiles()** (*pyAgrum.CredalNet method*), 203  
**InvalidArc**, 231  
**InvalidArgument**, 231  
**InvalidArgumentsNumber**, 231  
**InvalidDirectedCycle**, 232  
**InvalidEdge**, 232  
**InvalidNode**, 232  
**inverse()** (*pyAgrum.Potential method*), 153  
**IOError**, 230  
**isAttribute()** (*pyAgrum.PRMexplorer method*), 196  
**isChanceNode()** (*pyAgrum.InfluenceDiagram method*), 215  
**isClass()** (*pyAgrum.PRMexplorer method*), 196  
**isDecisionNode()** (*pyAgrum.InfluenceDiagram method*), 215  
**isDrawnAtRandom()** (*pyAgrum.GibbsBNdistance method*), 19  
**isDrawnAtRandom()** (*pyAgrum.GibbsSampling method*), 60  
**isDrawnAtRandom()** (*pyAgrum.LoopyGibbsSampling method*), 85  
**isEnabledEpsilon()** (*pyAgrum.GibbsBNdistance method*), 19  
**isEnabledMaxIter()** (*pyAgrum.GibbsBNdistance method*), 19  
**isEnabledMaxTime()** (*pyAgrum.GibbsBNdistance method*), 19  
**isEnabledMinEpsilonRate()** (*pyAgrum.GibbsBNdistance method*), 19  
**isInstalledNode()** (*pyAgrum.BayesNetFragment method*), 28  
**isInterface()** (*pyAgrum.PRMexplorer method*), 196  
**isJoinTree()** (*pyAgrum.CliqueGraph method*), 127  
**isJointTarget()** (*pyAgrum.LazyPropagation method*), 35  
**isJointTarget()** (*pyAgrum.ShaferShenoyInference method*), 42  
**isJointTarget()** (*pyAgrum.VariableElimination method*), 48  
**isLabel()** (*pyAgrum.LabelizedVariable method*), 136  
**isMutable()** (*pyAgrum.Instantiation method*), 148  
**isNonZeroMap()** (*pyAgrum.Potential method*), 153  
**isOMP()** (*in module pyAgrum*), 225  
**isSeparatelySpecified()** (*pyAgrum.CredalNet method*), 203  
**isTarget()** (*pyAgrum.GibbsSampling method*), 60  
**isTarget()** (*pyAgrum.ImportanceSampling method*), 79  
**isTarget()** (*pyAgrum.LazyPropagation method*), 35  
**isTarget()** (*pyAgrum.LoopyBeliefPropagation method*), 54  
**isTarget()** (*pyAgrum.LoopyGibbsSampling method*), 85  
**isTarget()** (*pyAgrum.LoopyImportanceSampling method*), 104  
**isTarget()** (*pyAgrum.LoopyMonteCarloSampling method*), 91  
**isTarget()** (*pyAgrum.LoopyWeightedSampling method*), 97  
**isTarget()** (*pyAgrum.MonteCarloSampling method*), 67  
**isTarget()** (*pyAgrum.ShaferShenoyInference method*), 42  
**isTarget()** (*pyAgrum.VariableElimination method*), 48  
**isTarget()** (*pyAgrum.WeightedSampling method*), 73  
**isTick()** (*pyAgrum.DiscretizedVariable method*), 139  
**isType()** (*pyAgrum.PRMexplorer method*), 196  
**isUtilityNode()** (*pyAgrum.InfluenceDiagram method*), 215

**J**

**jointMutualInformation()** (*pyAgrum.LazyPropagation method*), 35  
**jointMutualInformation()** (*pyAgrum.ShaferShenoyInference method*), 42  
**jointMutualInformation()** (*pyAgrum.VariableElimination method*), 48  
**jointPosterior()** (*pyAgrum.LazyPropagation method*), 35  
**jointPosterior()** (*pyAgrum.ShaferShenoyInference method*), 42  
**jointPosterior()** (*pyAgrum.VariableElimination method*), 48  
**jointProbability()** (*pyAgrum.BayesNet method*), 12  
**jointProbability()** (*pyAgrum.BayesNetFragment method*), 28  
**joinTree()** (*pyAgrum.LazyPropagation method*), 35

```

joinTree()      (pyAgrum.ShaferShenoyInference
               method), 42
jointTargets()   (pyAgrum.LazyPropagation
               method), 36
jointTargets()   (pyAgrum.ShaferShenoyInference
               method), 43
jointTargets()   (pyAgrum.VariableElimination
               method), 48
junctionTree()   (pyAgrum.JunctionTreeGenerator
               method), 22
junctionTree()   (pyAgrum.LazyPropagation
               method), 36
junctionTree()   (pyAgrum.ShaferShenoyInference
               method), 43
junctionTree()   (pyAgrum.VariableElimination
               method), 49
JunctionTreeGenerator (class in pyAgrum), 21
junctionTreeToDot()   (pyA-
                     grum.InfluenceDiagramInference
                     method), 218

K
KL() (pyAgrum.Potential method), 151
knw (pyAgrum.causal.ASTposteriorProba attribute),
      190

L
label() (pyAgrum.DiscreteVariable method), 134
label() (pyAgrum.DiscretizedVariable method), 139
label() (pyAgrum.LabelizedVariable method), 136
label() (pyAgrum.RangeVariable method), 141
LabelizedVariable (class in pyAgrum), 135
labels() (pyAgrum.DiscreteVariable method), 134
labels() (pyAgrum.DiscretizedVariable method),
      139
labels() (pyAgrum.LabelizedVariable method), 137
labels() (pyAgrum.RangeVariable method), 142
lagrangeNormalization()   (pyA-
                           grum.CredalNet method), 203
latentVariables()   (pyAgrum.BNLearnert
                     method), 109
latentVariablesIds()   (pyA-
                           grum.causal.CausalModel method), 184
latexQuery()   (pyAgrum.causal.CausalFormula
                     method), 185
LazyPropagation (class in pyAgrum), 31
learnBN() (pyAgrum.BNLearnert method), 109
learnDAG() (pyAgrum.BNLearnert method), 109
learnMixedStructure()   (pyAgrum.BNLearnert
                     method), 109
learnParameters()   (pyAgrum.BNLearnert
                     method), 109
line() (pyAgrum.SyntaxException method), 237
load() (pyAgrum.PRMexplorer method), 196
loadBIF() (pyAgrum.BayesNet method), 12
loadBIFXML() (pyAgrum.BayesNet method), 12
loadBIFXML()   (pyAgrum.InfluenceDiagram
                     method), 215

loadBN() (in module pyAgrum), 220
loadDSL() (pyAgrum.BayesNet method), 12
loadID() (in module pyAgrum), 221
loadNET() (pyAgrum.BayesNet method), 12
loadO3PRM() (pyAgrum.BayesNet method), 12
loadUAI() (pyAgrum.BayesNet method), 13
log10DomainSize()   (pyAgrum.BayesNet
                     method), 13
log10DomainSize()   (pyA-
                     grum.BayesNetFragment method), 28
log10DomainSize()   (pyAgrum.InfluenceDiagram
                     method), 215
log2() (pyAgrum.Potential method), 153
log2JointProbability()   (pyAgrum.BayesNet
                     method), 13
log2JointProbability()   (pyA-
                     grum.BayesNetFragment method), 28
log2likelihood()   (pyA-
                     grum.BNDatabaseGenerator
                     method), 17
logLikelihood()   (pyAgrum.BNLearner method),
      110
loopIn() (pyAgrum.Potential method), 153
LoopyBeliefPropagation (class in pyAgrum),
      51
LoopyGibbsSampling (class in pyAgrum), 81
LoopyImportanceSampling (class in pyAgrum),
      100
LoopyMonteCarloSampling (class in pyAgrum),
      88
LoopyWeightedSampling (class in pyAgrum), 94

M
makeInference()   (pyA-
                     grum.CNLoopyPropagation
                     method), 207
makeInference()   (pyA-
                     grum.CNMonteCarloSampling
                     method), 205
makeInference()   (pyAgrum.GibbsSampling
                     method), 60
makeInference()   (pyAgrum.ImportanceSampling
                     method), 79
makeInference()   (pyAgrum.InfluenceDiagramInference
                     method), 218
makeInference()   (pyAgrum.LazyPropagation
                     method), 36
makeInference()   (pyA-
                     grum.LoopyBeliefPropagation
                     method), 54
makeInference()   (pyAgrum.LoopyGibbsSampling
                     method), 85
makeInference()   (pyA-
                     grum.LoopyImportanceSampling
                     method), 104
makeInference()   (pyA-
                     grum.LoopyMonteCarloSampling
                     method),

```

makeInference () grum.LoopyWeightedSampling 98	(pyA- method), 13
makeInference () (pyAgrum.MonteCarloSampling method), 67	maxNonOneParam () (pyAgrum.BayesNetFragment method), 28
makeInference () grum.ShaferShenoyInference 43	maxParam () (pyAgrum.BayesNet method), 13
makeInference () (pyAgrum.VariableElimination method), 49	maxParam () (pyAgrum.BayesNetFragment method), 28
makeInference () (pyAgrum.WeightedSampling method), 73	maxTime () (pyAgrum.BNLearner method), 110
marginalMax () (pyAgrum.CNLoopyPropagation method), 207	maxTime () (pyAgrum.CNLoopyPropagation method), 208
marginalMax () grum.CNMonteCarloSampling 205	maxTime () (pyAgrum.CNMonteCarloSampling method), 205
marginalMin () (pyAgrum.CNLoopyPropagation method), 208	maxTime () (pyAgrum.GibbsBNdistance method), 20
marginalMin () grum.CNMonteCarloSampling 205	maxTime () (pyAgrum.GibbsSampling method), 61
margMaxIn () (pyAgrum.Potential method), 153	maxTime () (pyAgrum.ImportanceSampling method), 79
margMaxOut () (pyAgrum.Potential method), 153	maxTime () (pyAgrum.LoopyBeliefPropagation method), 54
margMinIn () (pyAgrum.Potential method), 154	maxTime () (pyAgrum.LoopyGibbsSampling method), 85
margMinOut () (pyAgrum.Potential method), 154	maxTime () (pyAgrum.LoopyImportanceSampling method), 104
margProdIn () (pyAgrum.Potential method), 154	maxTime () (pyAgrum.LoopyMonteCarloSampling method), 92
margProdOut () (pyAgrum.Potential method), 154	maxTime () (pyAgrum.LoopyWeightedSampling method), 98
margSumIn () (pyAgrum.Potential method), 154	maxTime () (pyAgrum.MonteCarloSampling method), 67
margSumOut () (pyAgrum.Potential method), 154	maxTime () (pyAgrum.WeightedSampling method), 73
MarkovBlanket (class in pyAgrum), 24	maxVal () (pyAgrum.RangeVariable method), 142
max () (pyAgrum.Potential method), 154	maxVarDomainSize () (pyAgrum.BayesNet method), 13
maxIter () (pyAgrum.BNLearner method), 110	maxVarDomainSize () (pyA- grum.BayesNetFragment method), 28
maxIter () (pyAgrum.CNLoopyPropagation method), 208	messageApproximationScheme () (pyA- grum.BNLearner method), 110
maxIter () (pyAgrum.CNMonteCarloSampling method), 205	messageApproximationScheme () (pyA- grum.CNLoopyPropagation method), 208
maxIter () (pyAgrum.GibbsBNdistance method), 20	messageApproximationScheme () (pyA- grum.CNMonteCarloSampling method), 205
maxIter () (pyAgrum.GibbsSampling method), 60	messageApproximationScheme () (pyA- grum.GibbsBNdistance method), 20
maxIter () (pyAgrum.ImportanceSampling method), 79	messageApproximationScheme () (pyA- grum.GibbsSampling method), 61
maxIter () (pyAgrum.LoopyBeliefPropagation method), 54	messageApproximationScheme () (pyA- grum.ImportanceSampling method), 79
maxIter () (pyAgrum.LoopyGibbsSampling method), 85	messageApproximationScheme () (pyA- grum.LoopyBeliefPropagation method), 54
maxIter () (pyAgrum.LoopyImportanceSampling method), 104	messageApproximationScheme () (pyA- grum.LoopyGibbsSampling method), 85
maxIter () (pyAgrum.LoopyMonteCarloSampling method), 92	messageApproximationScheme () (pyA- grum.LoopyImportanceSampling method), 104
maxIter () (pyAgrum.LoopyWeightedSampling method), 98	messageApproximationScheme () (pyA- grum.LoopyMonteCarloSampling method), 92
maxIter () (pyAgrum.MonteCarloSampling method), 67	
maxIter () (pyAgrum.WeightedSampling method), 73	
maxNonOne () (pyAgrum.Potential method), 155	
maxNonOneParam () (pyAgrum.BayesNet method),	

messageApproximationScheme ()  
*grum.LoopyWeightedSampling*  
**98**

messageApproximationScheme ()  
*grum.MonteCarloSampling method*, **67**

messageApproximationScheme ()  
*grum.WeightedSampling method*, **73**

min () (*pyAgrum.Potential method*), **155**

minEpsilonRate ()  
*(pyAgrum.BNLearnert  
method)*, **110**

minEpsilonRate ()  
*grum.CNLoopyPropagation*  
**208**

minEpsilonRate ()  
*grum.CNMonteCarloSampling*  
**206**

minEpsilonRate ()  
*(pyAgrum.GibbsBNdistance  
method)*, **20**

minEpsilonRate ()  
*(pyAgrum.GibbsSampling  
method)*, **61**

minEpsilonRate ()  
*(pyA-  
grum.ImportanceSampling method)*, **79**

minEpsilonRate ()  
*grum.LoopyBeliefPropagation*  
**54**

minEpsilonRate ()  
*grum.LoopyGibbsSampling method*, **85**

minEpsilonRate ()  
*grum.LoopyImportanceSampling*  
**104**

minEpsilonRate ()  
*grum.LoopyMonteCarloSampling*  
**92**

minEpsilonRate ()  
*grum.LoopyWeightedSampling*  
**98**

minEpsilonRate ()  
*grum.MonteCarloSampling method*, **67**

minEpsilonRate ()  
*(pyAgrum.WeightedSampling  
method)*, **73**

minimalCondSet ()  
*(pyAgrum.BayesNet method)*, **14**

minimalCondSet ()  
*(pyAgrum.BayesNetFragment  
method)*, **28**

minNonZero () (*pyAgrum.Potential method*), **155**

minNonZeroParam ()  
*(pyAgrum.BayesNet  
method)*, **14**

minNonZeroParam ()  
*(pyA-  
grum.BayesNetFragment method)*, **28**

minParam () (*pyAgrum.BayesNet method*), **14**

minParam () (*pyAgrum.BayesNetFragment method*), **28**

minVal () (*pyAgrum.RangeVariable method*), **142**

MixedGraph (*class in pyAgrum*), **128**

mixedGraph () (*pyAgrum.EssentialGraph method*), **23**

mixedOrientedPath ()  
*(pyAgrum.MixedGraph  
method)*, **131**

(pyA-  
method), **131**

MonteCarloSampling (*class in pyAgrum*), **63**

moralGraph () (*pyAgrum.BayesNet method*), **14**

moralGraph ()  
*(pyAgrum.BayesNetFragment  
method)*, **29**

moralGraph () (*pyAgrum.DAG method*), **121**

moralGraph ()  
*(pyAgrum.InfluenceDiagram  
method)*, **215**

## N

name () (*pyAgrum.DiscreteVariable method*), **134**

name () (*pyAgrum.DiscretizedVariable method*), **139**

name () (*pyAgrum.LabelizedVariable method*), **137**

name () (*pyAgrum.RangeVariable method*), **142**

nameFromId () (*pyAgrum.BNLearnert method*), **110**

names () (*pyAgrum.BayesNet method*), **14**

names () (*pyAgrum.BayesNetFragment method*), **29**

names () (*pyAgrum.BNLearnert method*), **110**

names () (*pyAgrum.causal.CausalModel method*), **184**

names () (*pyAgrum.InfluenceDiagram method*), **215**

nbCols () (*pyAgrum.BNLearnert method*), **111**

nbrDim () (*pyAgrum.Instantiation method*), **148**

nbrDim () (*pyAgrum.Potential method*), **155**

nbrDrawnVar ()  
*(pyAgrum.GibbsBNdistance  
method)*, **20**

nbrDrawnVar ()  
*(pyAgrum.GibbsSampling  
method)*, **61**

nbrDrawnVar ()  
*(pyAgrum.LoopyGibbsSampling  
method)*, **86**

nbrEvidence ()  
*(pyAgrum.GibbsSampling  
method)*, **61**

nbrEvidence ()  
*(pyAgrum.ImportanceSampling  
method)*, **79**

nbrEvidence ()  
*(pyAgrum.LazyPropagation  
method)*, **36**

nbrEvidence ()  
*(pyAgrum.LoopyBeliefPropagation  
method)*, **54**

nbrEvidence ()  
*(pyAgrum.LoopyGibbsSampling  
method)*, **86**

nbrEvidence ()  
*(pyA-  
grum.LoopyImportanceSampling  
method)*, **104**

nbrEvidence ()  
*grum.LoopyMonteCarloSampling*  
**92**

nbrEvidence ()  
*grum.LoopyWeightedSampling*  
**98**

nbrEvidence ()  
*(pyAgrum.MonteCarloSampling  
method)*, **67**

nbrEvidence ()  
*(pyAgrum.ShaferShenoyInference  
method)*, **43**

nbrEvidence ()  
*(pyAgrum.VariableElimination  
method)*, **49**

nbrEvidence ()  
*(pyAgrum.WeightedSampling  
method)*, **73**

**nbrHardEvidence()** (*pyAgrum.GibbsSampling method*), 61  
**nbrHardEvidence()** (*pyAgrum.ImportanceSampling method*), 79  
**nbrHardEvidence()** (*pyAgrum.LazyPropagation method*), 36  
**nbrHardEvidence()** (*pyAgrum.LoopyBeliefPropagation method*), 55  
**nbrHardEvidence()** (*pyAgrum.LoopyGibbsSampling method*), 86  
**nbrHardEvidence()** (*pyAgrum.LoopyImportanceSampling method*), 104  
**nbrHardEvidence()** (*pyAgrum.LoopyMonteCarloSampling method*), 92  
**nbrHardEvidence()** (*pyAgrum.LoopyWeightedSampling method*), 98  
**nbrHardEvidence()** (*pyAgrum.MonteCarloSampling method*), 67  
**nbrHardEvidence()** (*pyAgrum.ShaferShenoyInference method*), 43  
**nbrHardEvidence()** (*pyAgrum.VariableElimination method*), 49  
**nbrHardEvidence()** (*pyAgrum.WeightedSampling method*), 73  
**nbrIterations()** (*pyAgrum.BNLearn method*), 111  
**nbrIterations()** (*pyAgrum.CNLoopyPropagation method*), 208  
**nbrIterations()** (*pyAgrum.CNMonteCarloSampling method*), 206  
**nbrIterations()** (*pyAgrum.GibbsBNdistance method*), 20  
**nbrIterations()** (*pyAgrum.GibbsSampling method*), 61  
**nbrIterations()** (*pyAgrum.ImportanceSampling method*), 79  
**nbrIterations()** (*pyAgrum.LoopyBeliefPropagation method*), 55  
**nbrIterations()** (*pyAgrum.LoopyGibbsSampling method*), 86  
**nbrIterations()** (*pyAgrum.LoopyImportanceSampling method*), 104  
**nbrIterations()** (*pyAgrum.LoopyMonteCarloSampling method*), 92  
**nbrIterations()** (*pyAgrum.LoopyWeightedSampling method*), 98  
**nbrIterations()** (*pyAgrum.MonteCarloSampling method*), 68

**method)**, 67  
**nbrIterations()** (*pyAgrum.WeightedSampling method*), 73  
**nbrJointTargets()** (*pyAgrum.LazyPropagation method*), 36  
**nbrJointTargets()** (*pyAgrum.ShaferShenoyInference method*), 43  
**nbRows()** (*pyAgrum.BNLearn method*), 111  
**nbrSoftEvidence()** (*pyAgrum.GibbsSampling method*), 61  
**nbrSoftEvidence()** (*pyAgrum.ImportanceSampling method*), 80  
**nbrSoftEvidence()** (*pyAgrum.LazyPropagation method*), 36  
**nbrSoftEvidence()** (*pyAgrum.LoopyBeliefPropagation method*), 55  
**nbrSoftEvidence()** (*pyAgrum.LoopyGibbsSampling method*), 86  
**nbrSoftEvidence()** (*pyAgrum.LoopyImportanceSampling method*), 104  
**nbrSoftEvidence()** (*pyAgrum.LoopyMonteCarloSampling method*), 92  
**nbrSoftEvidence()** (*pyAgrum.LoopyWeightedSampling method*), 98  
**nbrSoftEvidence()** (*pyAgrum.MonteCarloSampling method*), 67  
**nbrSoftEvidence()** (*pyAgrum.ShaferShenoyInference method*), 43  
**nbrSoftEvidence()** (*pyAgrum.VariableElimination method*), 49  
**nbrSoftEvidence()** (*pyAgrum.WeightedSampling method*), 73  
**nbrTargets()** (*pyAgrum.GibbsSampling method*), 61  
**nbrTargets()** (*pyAgrum.ImportanceSampling method*), 80  
**nbrTargets()** (*pyAgrum.LazyPropagation method*), 36  
**nbrTargets()** (*pyAgrum.LoopyBeliefPropagation method*), 55  
**nbrTargets()** (*pyAgrum.LoopyGibbsSampling method*), 86  
**nbrTargets()** (*pyAgrum.LoopyImportanceSampling method*), 105  
**nbrTargets()** (*pyAgrum.LoopyMonteCarloSampling method*), 92  
**nbrTargets()** (*pyAgrum.LoopyWeightedSampling method*), 98  
**nbrTargets()** (*pyAgrum.MonteCarloSampling method*), 68

**nbrTargets()** (*pyAgrum.ShaferShenoyInference method*), 43  
**nbrTargets()** (*pyAgrum.VariableElimination method*), 49  
**nbrTargets()** (*pyAgrum.WeightedSampling method*), 74  
**neighbours()** (*pyAgrum.CliqueGraph method*), 127  
**neighbours()** (*pyAgrum.EssentialGraph method*), 23  
**neighbours()** (*pyAgrum.MixedGraph method*), 131  
**neighbours()** (*pyAgrum.UndiGraph method*), 123  
**newFactory()** (*pyAgrum.Potential method*), 155  
**NoChild**, 233  
**nodeId()** (*pyAgrum.BayesNet method*), 14  
**nodeId()** (*pyAgrum.BayesNetFragment method*), 29  
**nodeId()** (*pyAgrum.InfluenceDiagram method*), 215  
**nodes()** (*pyAgrum.BayesNet method*), 14  
**nodes()** (*pyAgrum.BayesNetFragment method*), 29  
**nodes()** (*pyAgrum.CliqueGraph method*), 127  
**nodes()** (*pyAgrum.DAG method*), 121  
**nodes()** (*pyAgrum.DiGraph method*), 119  
**nodes()** (*pyAgrum.EssentialGraph method*), 23  
**nodes()** (*pyAgrum.InfluenceDiagram method*), 216  
**nodes()** (*pyAgrum.MarkovBlanket method*), 24  
**nodes()** (*pyAgrum.MixedGraph method*), 131  
**nodes()** (*pyAgrum.UndiGraph method*), 123  
**nodeType()** (*pyAgrum.CredalNet method*), 203  
**noising()** (*pyAgrum.Potential method*), 155  
**NoNeighbour**, 233  
**NoParent**, 233  
**normalize()** (*pyAgrum.Potential method*), 155  
**normalizeAsCPT()** (*pyAgrum.Potential method*), 155  
**NotFound**, 234  
**NullElement**, 234  
**numerical()** (*pyAgrum.DiscreteVariable method*), 134  
**numerical()** (*pyAgrum.DiscretizedVariable method*), 139  
**numerical()** (*pyAgrum.LabelizedVariable method*), 137  
**numerical()** (*pyAgrum.RangeVariable method*), 142

**O**

**observationalBN()** (*pyAgrum.causal.CausalModel method*), 184  
**op1** (*pyAgrum.causal.ASTBinaryOp attribute*), 187  
**op1** (*pyAgrum.causal.ASTdiv attribute*), 188  
**op1** (*pyAgrum.causal.ASTminus attribute*), 188  
**op1** (*pyAgrum.causal.ASTMult attribute*), 189  
**op1** (*pyAgrum.causal.ASTplus attribute*), 187  
**op2** (*pyAgrum.causal.ASTBinaryOp attribute*), 187  
**op2** (*pyAgrum.causal.ASTdiv attribute*), 188  
**op2** (*pyAgrum.causal.ASTminus attribute*), 188  
**op2** (*pyAgrum.causal.ASTMult attribute*), 189

**op2** (*pyAgrum.causal.ASTplus attribute*), 187  
**OperationNotAllowed**, 234  
**other()** (*pyAgrum.Arc method*), 115  
**other()** (*pyAgrum.Edge method*), 116  
**OutOfBounds**, 235  
**OutOfLowerBound**, 235  
**OutOfUpperBound**, 235

**P**

**parents()** (*pyAgrum.BayesNet method*), 14  
**parents()** (*pyAgrum.BayesNetFragment method*), 29  
**parents()** (*pyAgrum.causal.CausalModel method*), 184  
**parents()** (*pyAgrum.DAG method*), 121  
**parents()** (*pyAgrum.DiGraph method*), 119  
**parents()** (*pyAgrum.EssentialGraph method*), 23  
**parents()** (*pyAgrum.InfluenceDiagram method*), 216  
**parents()** (*pyAgrum.MarkovBlanket method*), 25  
**parents()** (*pyAgrum.MixedGraph method*), 131  
**partialUndiGraph()** (*pyAgrum.CliqueGraph method*), 127  
**partialUndiGraph()** (*pyAgrum.MixedGraph method*), 131  
**partialUndiGraph()** (*pyAgrum.UndiGraph method*), 123  
**pdfize()** (*in module pyAgrum.lib.bn2graph*), 172, 174  
**periodSize()** (*pyAgrum.BNLearned method*), 111  
**periodSize()** (*pyAgrum.CNLoopyPropagation method*), 208  
**periodSize()** (*pyAgrum.CNMonteCarloSampling method*), 206  
**periodSize()** (*pyAgrum.GibbsBNdistance method*), 20  
**periodSize()** (*pyAgrum.GibbsSampling method*), 61  
**periodSize()** (*pyAgrum.ImportanceSampling method*), 80  
**periodSize()** (*pyAgrum.LoopyBeliefPropagation method*), 55  
**periodSize()** (*pyAgrum.LoopyGibbsSampling method*), 86  
**periodSize()** (*pyAgrum.LoopyImportanceSampling method*), 105  
**periodSize()** (*pyAgrum.LoopyMonteCarloSampling method*), 92  
**periodSize()** (*pyAgrum.LoopyWeightedSampling method*), 98  
**periodSize()** (*pyAgrum.MonteCarloSampling method*), 68  
**periodSize()** (*pyAgrum.WeightedSampling method*), 74  
**pngize()** (*in module pyAgrum.lib.bn2graph*), 172, 174

**p**  
 populate() (*pyAgrum.Potential method*), 155  
 pos() (*pyAgrum.Instantiation method*), 148  
 pos() (*pyAgrum.Potential method*), 155  
 posLabel() (*pyAgrum.LabelizedVariable method*), 137  
 posterior() (*pyAgrum.GibbsSampling method*), 61  
 posterior() (*pyAgrum.ImportanceSampling method*), 80  
 posterior() (*pyAgrum.LazyPropagation method*), 36  
 posterior() (*pyAgrum.LoopyBeliefPropagation method*), 55  
 posterior() (*pyAgrum.LoopyGibbsSampling method*), 86  
 posterior() (*pyAgrum.LoopyImportanceSampling method*), 105  
 posterior() (*pyAgrum.LoopyMonteCarloSampling method*), 92  
 posterior() (*pyAgrum.LoopyWeightedSampling method*), 99  
 posterior() (*pyAgrum.MonteCarloSampling method*), 68  
 posterior() (*pyAgrum.ShaferShenoyInference method*), 43  
 posterior() (*pyAgrum.VariableElimination method*), 49  
 posterior() (*pyAgrum.WeightedSampling method*), 74  
 Potential (*class in pyAgrum*), 151  
 PRMexplorer (*class in pyAgrum*), 193  
 proba2histo() (*in module pyAgrum.lib.bn2graph*), 172, 173  
 product() (*pyAgrum.Potential method*), 155  
 property() (*pyAgrum.BayesNet method*), 14  
 property() (*pyAgrum.BayesNetFragment method*), 29  
 property() (*pyAgrum.InfluenceDiagram method*), 216  
 propertyWithDefault() (*pyAgrum.BayesNet method*), 15  
 propertyWithDefault() (*pyAgrum.BayesNetFragment method*), 29  
 propertyWithDefault() (*pyAgrum.InfluenceDiagram method*), 216  
 putFirst() (*pyAgrum.Potential method*), 155  
 pyAgrum.causal.notebook (*module*), 190  
 pyAgrum.lib.bn2graph (*module*), 171  
 pyAgrum.lib.notebook (*module*), 159

**R**  
 random() (*pyAgrum.Potential method*), 156  
 randomCPT() (*pyAgrum.Potential method*), 156  
 randomDistribution() (*in module pyAgrum*), 224  
 randomDistribution() (*pyAgrum.Potential method*), 156

randomProba() (*in module pyAgrum*), 224  
 RangeVariable (*class in pyAgrum*), 140  
 recordWeight() (*pyAgrum.BNLearnert method*), 111  
 ReferenceError, 236  
 remainingBurnIn() (*pyAgrum.GibbsBNdistance method*), 20  
 remove() (*pyAgrum.Potential method*), 156  
 rend() (*pyAgrum.Instantiation method*), 149  
 reorder() (*pyAgrum.Instantiation method*), 149  
 reorganize() (*pyAgrum.Potential method*), 156  
 reverseArc() (*pyAgrum.BayesNet method*), 15  
 root (*pyAgrum.causal.CausalFormula attribute*), 185

**S**  
 saveBIF() (*pyAgrum.BayesNet method*), 15  
 saveBIFXML() (*pyAgrum.BayesNet method*), 15  
 saveBIFXML() (*pyAgrum.InfluenceDiagram method*), 216  
 saveBN() (*in module pyAgrum*), 221  
 saveBNsMinMax() (*pyAgrum.CredalNet method*), 203  
 saveDSL() (*pyAgrum.BayesNet method*), 15  
 saveInference() (*pyAgrum.CNLoopyPropagation method*), 208  
 saveNET() (*pyAgrum.BayesNet method*), 15  
 saveO3PRM() (*pyAgrum.BayesNet method*), 15  
 saveUAI() (*pyAgrum.BayesNet method*), 15  
 scale() (*pyAgrum.Potential method*), 156  
 second() (*pyAgrum.Arc method*), 116  
 second() (*pyAgrum.Edge method*), 116  
 separator() (*pyAgrum.CliqueGraph method*), 127  
 set() (*pyAgrum.Potential method*), 156  
 setAntiTopologicalVarOrder() (*pyAgrum.BNDatabaseGenerator method*), 17  
 setAprioriWeight() (*pyAgrum.BNLearnert method*), 111  
 setBurnIn() (*pyAgrum.GibbsBNdistance method*), 20  
 setBurnIn() (*pyAgrum.GibbsSampling method*), 62  
 setBurnIn() (*pyAgrum.LoopyGibbsSampling method*), 86  
 setClique() (*pyAgrum.CliqueGraph method*), 127  
 setCPT() (*pyAgrum.CredalNet method*), 203  
 setCPTs() (*pyAgrum.CredalNet method*), 204  
 setDatabaseWeight() (*pyAgrum.BNLearnert method*), 111  
 setDescription() (*pyAgrum.DiscreteVariable method*), 134  
 setDescription() (*pyAgrum.DiscretizedVariable method*), 139  
 setDescription() (*pyAgrum.LabelizedVariable method*), 137  
 setDescription() (*pyAgrum.RangeVariable method*), 142

```

setDrawnAtRandom() (pyA-
    grum.GibbsBNdistance method), 20
setDrawnAtRandom() (pyAgrum.GibbsSampling
    method), 62
setDrawnAtRandom() (pyA-
    grum.LoopyGibbsSampling method), 86
setEpsilon() (pyAgrum.BNLearner method), 111
setEpsilon() (pyAgrum.CNLoopyPropagation
    method), 208
setEpsilon() (pyAgrum.CNMonteCarloSampling
    method), 206
setEpsilon() (pyAgrum.GibbsBNdistance
    method), 20
setEpsilon() (pyAgrum.GibbsSampling method),
    62
setEpsilon() (pyAgrum.ImportanceSampling
    method), 80
setEpsilon() (pyAgrum.LoopyBeliefPropagation
    method), 55
setEpsilon() (pyAgrum.LoopyGibbsSampling
    method), 86
setEpsilon() (pyA-
    grum.LoopyImportanceSampling method),
    105
setEpsilon() (pyA-
    grum.LoopyMonteCarloSampling method),
    93
setEpsilon() (pyAgrum.LoopyWeightedSampling
    method), 99
setEpsilon() (pyAgrum.MonteCarloSampling
    method), 68
setEpsilon() (pyAgrum.WeightedSampling
    method), 74
setEvidence() (pyAgrum.GibbsSampling
    method), 62
setEvidence() (pyAgrum.ImportanceSampling
    method), 80
setEvidence() (pyAgrum.InfluenceDiagramInference
    method), 218
setEvidence() (pyAgrum.LazyPropagation
    method), 37
setEvidence() (pyAgrum.LoopyBeliefPropagation
    method), 55
setEvidence() (pyAgrum.LoopyGibbsSampling
    method), 87
setEvidence() (pyA-
    grum.LoopyImportanceSampling method),
    105
setEvidence() (pyA-
    grum.LoopyMonteCarloSampling method),
    93
setEvidence() (pyA-
    grum.LoopyWeightedSampling method),
    99
setEvidence() (pyAgrum.MonteCarloSampling
    method), 68
setEvidence() (pyAgrum.ShaferShenoyInference
    method), 43
setEvidence() (pyAgrum.VariableElimination
    method), 49
setEvidence() (pyAgrum.WeightedSampling
    method), 74
setFindBarrenNodesType() (pyA-
    grum.LazyPropagation method), 37
setFindBarrenNodesType() (pyA-
    grum.ShaferShenoyInference
    method), 44
setFindBarrenNodesType() (pyA-
    grum.VariableElimination method), 50
setFirst() (pyAgrum.Instantiation method), 149
setFirstIn() (pyAgrum.Instantiation method),
    149
setFirstNotVar() (pyAgrum.Instantiation
    method), 149
setFirstOut() (pyAgrum.Instantiation method),
    149
setFirstVar() (pyAgrum.Instantiation method),
    149
setInitialDAG() (pyAgrum.BNLearner method),
    111
setLast() (pyAgrum.Instantiation method), 149
setLastIn() (pyAgrum.Instantiation method), 149
setLastNotVar() (pyAgrum.Instantiation
    method), 149
setLastOut() (pyAgrum.Instantiation method),
    149
setLastVar() (pyAgrum.Instantiation method),
    150
setMaxIndegree() (pyAgrum.BNLearner
    method), 111
setMaxIter() (pyAgrum.BNLearner method), 111
setMaxIter() (pyAgrum.CNLoopyPropagation
    method), 208
setMaxIter() (pyAgrum.CNMonteCarloSampling
    method), 206
setMaxIter() (pyAgrum.GibbsBNdistance
    method), 20
setMaxIter() (pyAgrum.GibbsSampling method),
    62
setMaxIter() (pyAgrum.ImportanceSampling
    method), 80
setMaxIter() (pyAgrum.LoopyBeliefPropagation
    method), 56
setMaxIter() (pyAgrum.LoopyGibbsSampling
    method), 87
setMaxIter() (pyA-
    grum.LoopyImportanceSampling method),
    105
setMaxIter() (pyA-
    grum.LoopyMonteCarloSampling method),
    93
setMaxIter() (pyAgrum.LoopyWeightedSampling
    method), 99
setMaxIter() (pyAgrum.MonteCarloSampling
    method), 68

```

setMaxIter() (pyAgrum.WeightedSampling method), 74  
 setMaxTime() (pyAgrum.BNLearn method), 111  
 setMaxTime() (pyAgrum.CNLoopyPropagation method), 209  
 setMaxTime() (pyAgrum.CNMonteCarloSampling method), 206  
 setMaxTime() (pyAgrum.GibbsBNdistance method), 20  
 setMaxTime() (pyAgrum.GibbsSampling method), 62  
 setMaxTime() (pyAgrum.ImportanceSampling method), 80  
 setMaxTime() (pyAgrum.LoopBeliefPropagation method), 56  
 setMaxTime() (pyAgrum.LoopGibbsSampling method), 87  
 setMaxTime() (pyAgrum.LoopImportanceSampling method), 105  
 setMaxTime() (pyAgrum.LoopMonteCarloSampling method), 93  
 setMaxTime() (pyAgrum.LoopWeightedSampling method), 99  
 setMaxTime() (pyAgrum.MonteCarloSampling method), 68  
 setMaxTime() (pyAgrum.WeightedSampling method), 74  
 setMaxVal() (pyAgrum.RangeVariable method), 142  
 setMinEpsilonRate() (pyAgrum.BNLearn method), 111  
 setMinEpsilonRate() (pyAgrum.CNLoopyPropagation method), 209  
 setMinEpsilonRate() (pyAgrum.CNMonteCarloSampling method), 206  
 setMinEpsilonRate() (pyAgrum.GibbsBNdistance method), 20  
 setMinEpsilonRate() (pyAgrum.GibbsSampling method), 62  
 setMinEpsilonRate() (pyAgrum.ImportanceSampling method), 80  
 setMinEpsilonRate() (pyAgrum.LoopBeliefPropagation method), 56  
 setMinEpsilonRate() (pyAgrum.LoopGibbsSampling method), 87  
 setMinEpsilonRate() (pyAgrum.LoopImportanceSampling method), 105  
 setMinEpsilonRate() (pyAgrum.LoopMonteCarloSampling method), 93  
 setMinEpsilonRate() (pyAgrum.LoopWeightedSampling method), 99  
 setMinEpsilonRate() (pyAgrum.MonteCarloSampling method), 68  
 setMinEpsilonRate() (pyAgrum.WeightedSampling method), 74  
 setMinEpsilonRate() (pyAgrum.WeightedSampling method), 99  
 setMinEpsilonRate() (pyAgrum.MonteCarloSampling method), 68  
 setMinEpsilonRate() (pyAgrum.WeightedSampling method), 74  
 setMinEpsilonRate() (pyAgrum.WeightedSampling method), 111  
 setMinEpsilonRate() (pyAgrum.WeightedSampling method), 142  
 setMutable() (pyAgrum.Instantiation method), 150  
 setName() (pyAgrum.DiscreteVariable method), 134  
 setName() (pyAgrum.DiscretizedVariable method), 139  
 setName() (pyAgrum.LabelizedVariable method), 137  
 setName() (pyAgrum.RangeVariable method), 142  
 setNbrDrawnVar() (pyAgrum.GibbsBNdistance method), 21  
 setNbrDrawnVar() (pyAgrum.GibbsSampling method), 62  
 setNbrDrawnVar() (pyAgrum.LoopGibbsSampling method), 87  
 setNumberOfThreads() (in module pyAgrum), 225  
 setPeriodSize() (pyAgrum.BNLearn method), 111  
 setPeriodSize() (pyAgrum.CNLoopyPropagation method), 209  
 setPeriodSize() (pyAgrum.CNMonteCarloSampling method), 206  
 setPeriodSize() (pyAgrum.GibbsBNdistance method), 21  
 setPeriodSize() (pyAgrum.GibbsSampling method), 62  
 setPeriodSize() (pyAgrum.ImportanceSampling method), 81  
 setPeriodSize() (pyAgrum.LoopBeliefPropagation method), 56  
 setPeriodSize() (pyAgrum.LoopGibbsSampling method), 87  
 setPeriodSize() (pyAgrum.LoopImportanceSampling method), 105  
 setPeriodSize() (pyAgrum.LoopMonteCarloSampling method), 93  
 setPeriodSize() (pyAgrum.LoopWeightedSampling method), 99  
 setPeriodSize() (pyAgrum.MonteCarloSampling method), 68  
 setPeriodSize() (pyAgrum.WeightedSampling method), 74  
 setPossibleSkeleton() (pyAgrum.BNLearn method), 111  
 setProperty() (pyAgrum.BayesNet method), 15

setProperty() ( <i>pyAgrum.BayesNetFragment         method</i> ), 29	setVarOrder() ( <i>pyAgrum.BNDatabaseGenerator         method</i> ), 17
setProperty() ( <i>pyAgrum.InfluenceDiagram         method</i> ), 216	setVarOrderFromCSV() ( <i>pyA-         grum.BNDatabaseGenerator         method</i> ), 17
setRandomVarOrder() ( <i>pyA-         grum.BNDatabaseGenerator         method</i> ), 17	setVerbosity() ( <i>pyAgrum.BNLearner         method</i> ), 112
setRecordWeight() ( <i>pyAgrum.BNLearner         method</i> ), 112	setVerbosity() ( <i>pyAgrum.CNLoopyPropagation         method</i> ), 209
setRelevantPotentialsFinderType() ( <i>pyAgrum.LazyPropagation         method</i> ), 37	setVerbosity() ( <i>pyA-         grum.CNMonteCarloSampling         method</i> ), 206
setRelevantPotentialsFinderType() ( <i>pyAgrum.VariableElimination         method</i> ), 50	setVerbosity() ( <i>pyAgrum.GibbsBNdistance         method</i> ), 21
setRepetitiveInd() ( <i>pyA-         grum.CNLoopyPropagation         method</i> ), 209	setVerbosity() ( <i>pyAgrum.GibbsSampling         method</i> ), 62
setRepetitiveInd() ( <i>pyA-         grum.CNMonteCarloSampling         method</i> ), 206	setVerbosity() ( <i>pyAgrum.ImportanceSampling         method</i> ), 81
setSliceOrder() ( <i>pyAgrum.BNLearner         method</i> ), 112	setVerbosity() ( <i>pyAgrum.LoopyBeliefPropagation         method</i> ), 56
setTargets() ( <i>pyAgrum.GibbsSampling         method</i> ), 62	setVerbosity() ( <i>pyAgrum.LoopyGibbsSampling         method</i> ), 87
setTargets() ( <i>pyAgrum.ImportanceSampling         method</i> ), 81	setVerbosity() ( <i>pyA-         grum.LoopyImportanceSampling         method</i> ), 106
setTargets() ( <i>pyAgrum.LazyPropagation         method</i> ), 37	setVerbosity() ( <i>pyA-         grum.LoopyMonteCarloSampling         method</i> ), 93
setTargets() ( <i>pyAgrum.LoopyBeliefPropagation         method</i> ), 56	setVerbosity() ( <i>pyA-         grum.LoopyWeightedSampling         method</i> ), 99
setTargets() ( <i>pyAgrum.LoopyGibbsSampling         method</i> ), 87	setVerbosity() ( <i>pyAgrum.MonteCarloSampling         method</i> ), 69
setTargets() ( <i>pyA-         grum.LoopyImportanceSampling         method</i> ), 105	setVerbosity() ( <i>pyAgrum.WeightedSampling         method</i> ), 75
setTargets() ( <i>pyA-         grum.LoopyMonteCarloSampling         method</i> ), 93	setVirtualLBPSize() ( <i>pyA-         grum.LoopyGibbsSampling         method</i> ), 87
setTargets() ( <i>pyAgrum.LoopyWeightedSampling         method</i> ), 99	setVirtualLBPSize() ( <i>pyA-         grum.LoopyImportanceSampling         method</i> ), 106
setTargets() ( <i>pyAgrum.MonteCarloSampling         method</i> ), 68	setVirtualLBPSize() ( <i>pyA-         grum.LoopyMonteCarloSampling         method</i> ), 93
setTargets() ( <i>pyAgrum.ShaferShenoyInference         method</i> ), 44	setVirtualLBPSize() ( <i>pyA-         grum.LoopyWeightedSampling         method</i> ), 99
setTargets() ( <i>pyAgrum.VariableElimination         method</i> ), 50	ShaferShenoyInference ( <i>class in pyAgrum</i> ), 38
setTargets() ( <i>pyAgrum.WeightedSampling         method</i> ), 75	showBN() ( <i>in module pyAgrum.lib.notebook</i> ), 162, 167
setTopologicalVarOrder() ( <i>pyA-         grum.BNDatabaseGenerator         method</i> ), 17	showBNDiff() ( <i>in module pyAgrum.lib.notebook</i> ), 162
setTriangulation() ( <i>pyAgrum.LazyPropagation         method</i> ), 37	showCausalImpact() ( <i>in module pyA-         grum.causal.notebook</i> ), 191
setTriangulation() ( <i>pyA-         grum.ShaferShenoyInference         method</i> ), 44	showCausalModel() ( <i>in module pyA-         grum.causal.notebook</i> ), 191
setTriangulation() ( <i>pyA-         grum.VariableElimination         method</i> ), 50	showDot() ( <i>in module pyAgrum.lib.notebook</i> ), 162, 166
setVals() ( <i>pyAgrum.Instantiation         method</i> ), 150	

**showGraph()** (in module `pyAgrum.lib.notebook`), 162, 166  
**showInference()** (in module `pyAgrum.lib.notebook`), 162, 167  
**showInfluenceDiagram()** (in module `pyAgrum.lib.notebook`), 163, 169  
**showInformation()** (in module `pyAgrum.lib.notebook`), 163, 168  
**showJunctionTree()** (in module `pyAgrum.lib.notebook`), 163, 168  
**showPosterior()** (in module `pyAgrum.lib.notebook`), 163, 165  
**showPotential()** (in module `pyAgrum.lib.notebook`), 164, 165  
**showProba()** (in module `pyAgrum.lib.notebook`), 164, 165  
**sideBySide()** (in module `pyAgrum.lib.notebook`), 164, 165  
**size()** (`pyAgrum.BayesNet` method), 16  
**size()** (`pyAgrum.BayesNetFragment` method), 29  
**size()** (`pyAgrum.CliqueGraph` method), 127  
**size()** (`pyAgrum.DAG` method), 121  
**size()** (`pyAgrum.DiGraph` method), 119  
**size()** (`pyAgrum.EssentialGraph` method), 23  
**size()** (`pyAgrum.InfluenceDiagram` method), 216  
**size()** (`pyAgrum.MarkovBlanket` method), 25  
**size()** (`pyAgrum.MixedGraph` method), 131  
**size()** (`pyAgrum.UndiGraph` method), 124  
**sizeArcs()** (`pyAgrum.BayesNet` method), 16  
**sizeArcs()** (`pyAgrum.BayesNetFragment` method), 30  
**sizeArcs()** (`pyAgrum.DAG` method), 121  
**sizeArcs()** (`pyAgrum.DiGraph` method), 119  
**sizeArcs()** (`pyAgrum.EssentialGraph` method), 23  
**sizeArcs()** (`pyAgrum.InfluenceDiagram` method), 216  
**sizeArcs()** (`pyAgrum.MarkovBlanket` method), 25  
**sizeArcs()** (`pyAgrum.MixedGraph` method), 131  
**sizeEdges()** (`pyAgrum.CliqueGraph` method), 127  
**sizeEdges()** (`pyAgrum.EssentialGraph` method), 24  
**sizeEdges()** (`pyAgrum.MixedGraph` method), 132  
**sizeEdges()** (`pyAgrum.UndiGraph` method), 124  
**SizeError**, 236  
**sizeNodes()** (`pyAgrum.EssentialGraph` method), 24  
**sizeNodes()** (`pyAgrum.MarkovBlanket` method), 25  
**skeleton()** (`pyAgrum.EssentialGraph` method), 24  
**softEvidenceNodes()** (`pyAgrum.GibbsSampling` method), 62  
**softEvidenceNodes()** (`pyAgrum.ImportanceSampling` method), 81  
**softEvidenceNodes()** (`pyAgrum.LazyPropagation` method), 37  
**softEvidenceNodes()** (`pyAgrum.LoopyBeliefPropagation` method), 56  
**softEvidenceNodes()** (`pyAgrum.`)  
**grum.LoopyGibbsSampling** method), 87  
**softEvidenceNodes()** (`pyAgrum.`  
**grum.LoopyImportanceSampling** method), 106  
**softEvidenceNodes()** (`pyAgrum.`  
**grum.LoopyMonteCarloSampling** method), 93  
**softEvidenceNodes()** (`pyAgrum.`  
**grum.LoopyWeightedSampling** method), 100  
**softEvidenceNodes()** (`pyAgrum.`  
**grum.MonteCarloSampling** method), 69  
**softEvidenceNodes()** (`pyAgrum.`  
**grum.ShaferShenoyInference** method), 44  
**softEvidenceNodes()** (`pyAgrum.`  
**grum.VariableElimination** method), 50  
**softEvidenceNodes()** (`pyAgrum.`  
**grum.WeightedSampling** method), 75  
**sq()** (`pyAgrum.Potential` method), 156  
**src\_bn()** (`pyAgrum.CredalNet` method), 204  
**startOfPeriod()** (`pyAgrum.GibbsBNdistance` method), 21  
**stateApproximationScheme()** (`pyAgrum.GibbsBNdistance` method), 21  
**stopApproximationScheme()** (`pyAgrum.GibbsBNdistance` method), 21  
**sum()** (`pyAgrum.Potential` method), 156  
**SyntaxError**, 236

## T

**tail()** (`pyAgrum.Arc` method), 116  
**targets()** (`pyAgrum.GibbsSampling` method), 63  
**targets()** (`pyAgrum.ImportanceSampling` method), 81  
**targets()** (`pyAgrum.LazyPropagation` method), 37  
**targets()** (`pyAgrum.LoopyBeliefPropagation` method), 56  
**targets()** (`pyAgrum.LoopyGibbsSampling` method), 87  
**targets()** (`pyAgrum.LoopyImportanceSampling` method), 106  
**targets()** (`pyAgrum.LoopyMonteCarloSampling` method), 93  
**targets()** (`pyAgrum.LoopyWeightedSampling` method), 100  
**targets()** (`pyAgrum.MonteCarloSampling` method), 69  
**targets()** (`pyAgrum.ShaferShenoyInference` method), 44  
**targets()** (`pyAgrum.VariableElimination` method), 50  
**targets()** (`pyAgrum.WeightedSampling` method), 75  
**tick()** (`pyAgrum.DiscretizedVariable` method), 139  
**ticks()** (`pyAgrum.DiscretizedVariable` method), 140  
**toarray()** (`pyAgrum.Potential` method), 156  
**toBN()** (`pyAgrum.BayesNetFragment` method), 30

```

toCSV() (pyAgrum.BNDatabaseGenerator method), 17
toDatabaseTable() (pyAgrum.BNDatabaseGenerator method), 17
todict() (pyAgrum.Instantiation method), 150
toDiscretizedVar() (pyAgrum.DiscreteVariable method), 134
toDiscretizedVar() (pyAgrum.DiscretizedVariable method), 140
toDiscretizedVar() (pyAgrum.LabelizedVariable method), 137
toDiscretizedVar() (pyAgrum.RangeVariable method), 142
toDot() (pyAgrum.BayesNet method), 16
toDot() (pyAgrum.BayesNetFragment method), 30
toDot() (pyAgrum.CliqueGraph method), 127
toDot() (pyAgrum.DAG method), 121
toDot() (pyAgrum.DiGraph method), 119
toDot() (pyAgrum.EssentialGraph method), 24
toDot() (pyAgrum.InfluenceDiagram method), 216
toDot() (pyAgrum.MarkovBlanket method), 25
toDot() (pyAgrum.MixedGraph method), 132
toDot() (pyAgrum.UndiGraph method), 124
toDotWithNames() (pyAgrum.CliqueGraph method), 128
toLabelizedVar() (pyAgrum.DiscreteVariable method), 134
toLabelizedVar() (pyAgrum.DiscretizedVariable method), 140
toLabelizedVar() (pyAgrum.LabelizedVariable method), 137
toLabelizedVar() (pyAgrum.RangeVariable method), 143
toLatex() (pyAgrum.causal.ASTBinaryOp method), 187
toLatex() (pyAgrum.causal.ASTdiv method), 188
toLatex() (pyAgrum.causal.ASTjointProba method), 189
toLatex() (pyAgrum.causal.ASTminus method), 188
toLatex() (pyAgrum.causal.ASTmult method), 189
toLatex() (pyAgrum.causal.ASTplus method), 187
toLatex() (pyAgrum.causal.ASTposteriorProba method), 190
toLatex() (pyAgrum.causal.ASTsum method), 189
toLatex() (pyAgrum.causal.ASTtree method), 187
toLatex() (pyAgrum.causal.CausalFormula method), 185
tolist() (pyAgrum.Potential method), 156
topologicalOrder() (pyAgrum.BayesNet method), 16
topologicalOrder() (pyAgrum.BayesNetFragment method), 30
topologicalOrder() (pyAgrum.DAG method), 121
topologicalOrder() (pyAgrum.DiGraph method), 119
topologicalOrder() (pyAgrum.InfluenceDiagram method), 216
topologicalOrder() (pyAgrum.MixedGraph method), 132
toRangeVar() (pyAgrum.DiscreteVariable method), 134
toRangeVar() (pyAgrum.DiscretizedVariable method), 140
toRangeVar() (pyAgrum.LabelizedVariable method), 137
toRangeVar() (pyAgrum.RangeVariable method), 143
toStringWithDescription() (pyAgrum.DiscreteVariable method), 134
toStringWithDescription() (pyAgrum.DiscretizedVariable method), 140
toStringWithDescription() (pyAgrum.LabelizedVariable method), 137
toStringWithDescription() (pyAgrum.RangeVariable method), 143
translate() (pyAgrum.Potential method), 157
type (pyAgrum.causal.ASTBinaryOp attribute), 187
type (pyAgrum.causal.ASTdiv attribute), 188
type (pyAgrum.causal.ASTjointProba attribute), 189
type (pyAgrum.causal.ASTminus attribute), 188
type (pyAgrum.causal.ASTmult attribute), 189
type (pyAgrum.causal.ASTplus attribute), 188
type (pyAgrum.causal.ASTposteriorProba attribute), 190
type (pyAgrum.causal.ASTsum attribute), 189
type (pyAgrum.causal.ASTtree attribute), 187
types() (pyAgrum.PRMexplorer method), 197

```

## U

```

UndefinedElement, 237
UndefinedIteratorKey, 237
UndefinedIteratorValue, 238
UndiGraph (class in pyAgrum), 121
UnidentifiableException (class in pyAgrum.causal), 190
uninstallCPT() (pyAgrum.BayesNetFragment method), 30
uninstallNode() (pyAgrum.BayesNetFragment method), 30
UnknownLabelInDatabase, 238
unsetEnd() (pyAgrum.Instantiation method), 150
unsetOverflow() (pyAgrum.Instantiation method), 150
updateApproximationScheme() (pyAgrum.GibbsBNdistance method), 21
updateEvidence() (pyAgrum.GibbsSampling method), 63
updateEvidence() (pyAgrum.ImportanceSampling method), 81
updateEvidence() (pyAgrum.LazyPropagation method), 37
updateEvidence() (pyAgrum.LoopyBeliefPropagation method),
```

56  
 updateEvidence() (pyA-  
     *grum.LoopyGibbsSampling method*), 87  
 updateEvidence() (pyA-  
     *grum.LoopyImportanceSampling method*),  
     106  
 updateEvidence() (pyA-  
     *grum.LoopyMonteCarloSampling method*,  
     94  
 updateEvidence() (pyA-  
     *grum.LoopyWeightedSampling method*,  
     100  
 updateEvidence() (pyA-  
     *grum.MonteCarloSampling method*), 69  
 updateEvidence() (pyA-  
     *grum.ShaferShenoyInference method*,  
     44  
 updateEvidence() (pyA-  
     *grum.VariableElimination method*), 50  
 updateEvidence() (pyAgrum.WeightedSampling  
     method), 75  
 use3off2() (pyAgrum.BNLearner method), 112  
 useAprioriBDeu() (pyAgrum.BNLearner  
     method), 112  
 useAprioriDirichlet() (pyAgrum.BNLearner  
     method), 112  
 useAprioriSmoothing() (pyAgrum.BNLearner  
     method), 112  
 useEM() (pyAgrum.BNLearner method), 112  
 useGreedyHillClimbing() (pyA-  
     *grum.BNLearner method*), 112  
 useK2() (pyAgrum.BNLearner method), 112  
 useLocalSearchWithTabuList() (pyA-  
     *grum.BNLearner method*), 112  
 useMDL() (pyAgrum.BNLearner method), 112  
 useMIIC() (pyAgrum.BNLearner method), 112  
 useNML() (pyAgrum.BNLearner method), 112  
 useNoApriori() (pyAgrum.BNLearner method),  
     112  
 useNoCorr() (pyAgrum.BNLearner method), 113  
 useScoreAIC() (pyAgrum.BNLearner method),  
     113  
 useScoreBD() (pyAgrum.BNLearner method), 113  
 useScoreBDeu() (pyAgrum.BNLearner method),  
     113  
 useScoreBIC() (pyAgrum.BNLearner method),  
     113  
 useScoreK2() (pyAgrum.BNLearner method), 113  
 useScoreLog2Likelihood() (pyA-  
     *grum.BNLearner method*), 113  
 utility() (pyAgrum.InfluenceDiagram method),  
     216  
 utilityNodeSize() (pyAgrum.InfluenceDiagram  
     method), 217

V

val() (pyAgrum.Instantiation method), 150  
 var\_dims (pyAgrum.Potential attribute), 157

var\_names (pyAgrum.Potential attribute), 157  
 variable() (pyAgrum.BayesNet method), 16  
 variable() (pyAgrum.BayesNetFragment method),  
     30  
 variable() (pyAgrum.InfluenceDiagram method),  
     217  
 variable() (pyAgrum.Instantiation method), 150  
 variable() (pyAgrum.Potential method), 157  
 VariableElimination (*class in pyAgrum*), 44  
 variableFromName() (pyAgrum.BayesNet  
     method), 16  
 variableFromName() (pyA-  
     *grum.BayesNetFragment method*), 30  
 variableFromName() (pyA-  
     *grum.InfluenceDiagram method*), 217  
 variableNodeMap() (pyAgrum.BayesNet  
     method), 16  
 variableNodeMap() (pyA-  
     *grum.BayesNetFragment method*), 30  
 variableNodeMap() (pyAgrum.InfluenceDiagram  
     method), 217  
 variablesSequence() (pyAgrum.Instantiation  
     method), 150  
 variablesSequence() (pyAgrum.Potential  
     method), 157  
 varNames (pyAgrum.causal.ASTjointProba  
     attribute), 189  
 varOrder() (pyAgrum.BNDatabaseGenerator  
     method), 17  
 varOrderNames() (pyA-  
     *grum.BNDatabaseGenerator method*),  
     17  
 vars (pyAgrum.causal.ASTposteriorProba  
     attribute), 190  
 varType() (pyAgrum.DiscreteVariable method), 135  
 varType() (pyAgrum.DiscretizedVariable method),  
     140  
 varType() (pyAgrum.LabelizedVariable method),  
     137  
 varType() (pyAgrum.RangeVariable method), 143  
 verbosity() (pyAgrum.BNLearner method), 113  
 verbosity() (pyAgrum.CNLoopyPropagation  
     method), 209  
 verbosity() (pyAgrum.CNMonteCarloSampling  
     method), 206  
 verbosity() (pyAgrum.GibbsBNdistance method),  
     21  
 verbosity() (pyAgrum.GibbsSampling method),  
     63  
 verbosity() (pyAgrum.ImportanceSampling  
     method), 81  
 verbosity() (pyAgrum.LoopyBeliefPropagation  
     method), 56  
 verbosity() (pyAgrum.LoopyGibbsSampling  
     method), 88  
 verbosity() (pyAgrum.LoopyImportanceSampling  
     method), 106  
 verbosity() (pyA-

```
    grum.LoopyMonteCarloSampling  method),  
    94  
verbosity()  (pyAgrum.LoopyWeightedSampling  
    method), 100  
verbosity()  (pyAgrum.MonteCarloSampling  
    method), 69  
verbosity()  (pyAgrum.WeightedSampling  
    method), 75  
VI() (pyAgrum.LazyPropagation method), 31  
VI() (pyAgrum.ShaferShenoyInference method), 38
```

**W**

```
WeightedSampling (class in pyAgrum), 69  
what() (pyAgrum.DefaultInLabel method), 227  
what() (pyAgrum.DuplicateElement method), 228  
what() (pyAgrum.DuplicateLabel method), 228  
what() (pyAgrum.EmptyBSTree method), 228  
what() (pyAgrum.EmptySet method), 229  
what() (pyAgrum.FatalError method), 229  
what() (pyAgrum.FormatNotFound method), 230  
what() (pyAgrum.GraphError method), 230  
what() (pyAgrum.GumException method), 229  
what() (pyAgrum.IdError method), 231  
what() (pyAgrum.InvalidArc method), 231  
what() (pyAgrum.InvalidArgument method), 231  
what() (pyAgrum.InvalidArgumentsNumber method),  
    232  
what() (pyAgrum.InvalidDirectedCycle method), 232  
what() (pyAgrum.InvalidEdge method), 232  
what() (pyAgrum.InvalidNode method), 233  
what() (pyAgrum.IOError method), 230  
what() (pyAgrum.NoChild method), 233  
what() (pyAgrum.NoNeighbour method), 233  
what() (pyAgrum.NoParent method), 234  
what() (pyAgrum.NotFound method), 234  
what() (pyAgrum.NullElement method), 234  
what() (pyAgrum.OperationNotAllowed  method),  
    235  
what() (pyAgrum.OutOfBounds method), 235  
what() (pyAgrum.OutOfLowerBound method), 235  
what() (pyAgrum.OutOfUpperBound method), 236  
what() (pyAgrum.ReferenceError method), 236  
what() (pyAgrum.SizeError method), 236  
what() (pyAgrum.SyntaxException method), 237  
what() (pyAgrum.UndefinedElement method), 237  
what() (pyAgrum.UndefinedIteratorKey  method),  
    238  
what() (pyAgrum.UndefinedIteratorValue  method),  
    238  
what()  (pyAgrum.UnknownLabelInDatabase  
    method), 238  
whenArcAdded()  (pyAgrum.BayesNetFragment  
    method), 31  
whenArcDeleted()  (pyAgrum.BayesNetFragment  
    method), 31  
whenNodeAdded()  (pyAgrum.BayesNetFragment  
    method), 31  
whenNodeDeleted()  
    (pyA-  
    grum.BayesNetFragment method), 31  
with_traceback()  
    (pyA-  
    grum.causal.HedgeException  
    method),  
    190  
with_traceback()  
    (pyA-  
    grum.causal.UnidentifiableException  
    method), 190  
with_traceback()  
    (pyAgrum.DefaultInLabel  
    method), 227  
with_traceback()  
    (pyAgrum.DuplicateElement  
    method), 228  
with_traceback()  
    (pyAgrum.DuplicateLabel  
    method), 228  
with_traceback()  
    (pyAgrum.EmptyBSTree  
    method), 228  
with_traceback()  
    (pyAgrum.EmptySet method),  
    229  
with_traceback()  
    (pyAgrum.FatalError method),  
    229  
with_traceback()  
    (pyAgrum.FormatNotFound  
    method), 230  
with_traceback()  
    (pyAgrum.GraphError  
    method), 230  
with_traceback()  
    (pyAgrum.GumException  
    method), 229  
with_traceback()  
    (pyAgrum.IdError  method),  
    231  
with_traceback()  
    (pyAgrum.InvalidArc method),  
    231  
with_traceback()  
    (pyAgrum.InvalidArgument  
    method), 231  
with_traceback()  
    (pyA-  
    grum.InvalidArgumentsNumber  
    method),  
    232  
with_traceback()  
    (pyA-  
    grum.InvalidDirectedCycle method), 232  
with_traceback()  
    (pyAgrum.InvalidEdge  
    method), 232  
with_traceback()  
    (pyAgrum.InvalidNode  
    method), 233  
with_traceback()  
    (pyAgrum.IOError  method),  
    230  
with_traceback()  
    (pyAgrum.NoChild  method),  
    233  
with_traceback()  
    (pyAgrum.NoNeighbour  
    method), 233  
with_traceback()  
    (pyAgrum.NoParent  
    method), 234  
with_traceback()  
    (pyAgrum.NotFound  
    method), 234  
with_traceback()  
    (pyAgrum.NullElement  
    method), 234  
with_traceback()  
    (pyA-  
    grum.OperationNotAllowed method), 235  
with_traceback()  
    (pyAgrum.OutOfBounds  
    method), 235  
with_traceback()  
    (pyAgrum.OutOfLowerBound
```

```
    method), 235
with_traceback() (pyAgrum.OutOfUpperBound
    method), 236
with_traceback() (pyAgrum.ReferenceError
    method), 236
with_traceback() (pyAgrum.SizeError method),
    236
with_traceback() (pyAgrum.SyntaxError
    method), 237
with_traceback() (pyAgrum.UndefinedElement
    method), 237
with_traceback() (pyAgrum.UndefinedIteratorKey method), 238
with_traceback() (pyAgrum.UndefinedIteratorValue
    method),
    238
with_traceback() (pyAgrum.UnknownLabelInDatabase
    method),
    238
```